



INTERNATIONAL EQUIPMENT COMPONENTS, INC.


www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT-DUTY

3D DESIGNED
LEVELING GLIDES



IMPROVED SLIDING CAPABILITIES

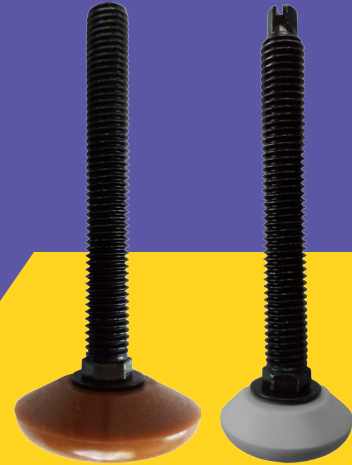

**LEVEL
SWIVEL
SLIDE
GLIDE**

Ph. 562.597.4533

Welcome ...

We are pleased to introduce our *Ruggedized Light Duty Glide* catalog offering many 3D designed and engineered products with numerous sought after features to provide just the right glide solution for your application.

We've included an overview of this new line and detailed product specification tables with dimensions and load ratings for easily finding an off-the-shelf standard product. You'll find a quote request form available for modifying a glide or a custom glide design when a standard product won't quite meet your leveling needs.

IEC's mission since 1992 has been to lead the glide and leveler industry in meeting the needs of OEM machinery and equipment manufacturers with products that match our customers' high standards and cost requirements. We have specialized in developing glides and levelers with the most commonly requested features, materials and configurations offering high-strength bases and adjustable 2" to 8" stud lengths. Our engineering department is always available to assist you with selecting the right standard product for your application or designing a leveler or glide to your exact specifications.

We recognize the need in OEM manufacturing for high performance products, attractive designs and competitive pricing. We've made every effort to address these needs in this new catalog. We now offer more choices for top and bottom leveler adjustment, stud and base materials and stud lengths to better suit your application needs.

Paying attention to our customers and their needs for over 20 years has enabled IEC to become the leader in leveling solution design and development, resulting in thousands of new products, stronger customer service and assurance that the products you specify today will be available for the duration of your product life-cycle.

IEC provides the industry's most complete line of standard and custom glides and leveling devices in "any thread...any length...any base." We appreciate your interest and hope to hear from you whenever you need a leveling solution.



CONTENTS

WELCOME

CONTENTS	3
PRODUCT OVERVIEW	4-5

RUGGEDIZED™ LIGHT DUTY GLIDES

Low Profile Saucer Base™ Fixed Stud Glides	6-13
Low Profile Saucer Base™ Fixed Socket Glides	14
Low Profile Saucer Base™ Metric Fixed Socket Glides	15
Low Profile Saucer Base™ Swivel Socket Glides	16
Low Profile Saucer Base™ Metric Swivel Socket Glides	17
Low Profile Saucer Base™ Swivel Stud Glides	18-25
Low Profile Poly Fixed Stud Glides	26-30
Low Profile Poly Swivel Stud Glides	32-36
Low Profile Nylon Swivel Stud Glides	38-45
Low Profile Steel Swivel Stud Glides	46-51
Hi-Pro® Fixed Stud Vibe-Glides®	52-59
Hi-Pro® Fixed Socket Vibe-Glides®	60
Hi-Pro® Fixed Socket Thru-Hole Vibe-Glides®	61
Hi-Pro® Poly Base Fixed Stud Glides	62-63
Knob Style Glides — Nylon Threads	64
Knob Style Glides — Socket Type	64
RFQ FAX-BACK FORM	
Request A Quote Form	66
WARRANTY	
Warranty and Disclaimer	67



RUGGEDIZED LIGHT DUTY GLIDES

Low Profile Saucer Base™ (Non-Swivel & Swivel) Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family.



Low Profile Saucer Base™ Fixed Socket Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**



Low Profile Saucer Base™ Swivel Socket Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**



Low Profile Fixed Stud Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Fixed Stud Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family.



Low Profile Poly Swivel Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Poly Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family.





INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

OVERVIEW

RUGGEDIZED LIGHT DUTY GLIDES

Low Profile Nylon Swivel Glides


The IEC *Nylon Swivel Ruggedized™ Light Duty (RLD) Glides* are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family.

Low Profile Steel Swivel Glides

The IEC *Steel Base Ruggedized™ Light Duty (RLD) Glides* are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family.

Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. Also available is the Hi-Pro® Fixed Socket Vibe-Glide® shown below:



For socket and thru-hole options, higher load ratings, more thread sizes and plating options for these Hi-Pro® Glides see IEC's Medium Duty catalog.



Hi-Pro® Poly Base Fixed Stud Glides

The IEC High Profile Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light-duty load requirements. The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.

Knob Style Glides – Nylon Threads

The IEC *Knob Style Nylon Thread Glide* is ideal for light duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.





INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES


SAUCER BASE™ FIXED GLIDES

3/4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**

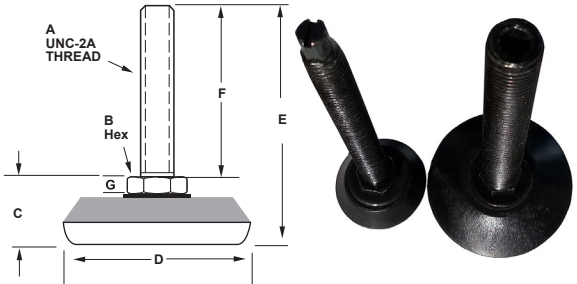

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables




Optional base colors.

Optional jam nut
(add -JN to part number) →



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

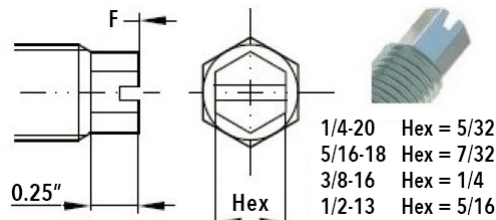

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL100-RLD-4BX1-BR	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL100-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL100-RLD-4BX15-BR	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL100-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL100-RLD-4B-BR	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-5BX1-BR	400	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL100-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL100-RLD-5B-BR	400	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-5BX3-BR	400	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL100-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL100-RLD-6B-BR	750	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-6BX3-BR	750	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL100-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL100-RLD-6BX4-BR	750	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL100-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL100-RLD-7B-BR	1500	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL100-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL100-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL100-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16
IL100-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this saucer base
design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ FIXED GLIDES

1" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides


The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**

Features



- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.



Optional jam nut
(add -JN to part number) →



LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL101-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL101-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL101-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL101-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL101-RLD-4B-BR	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL101-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL101-RLD-5B-BR	400	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL101-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL101-RLD-6B-BR	750	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL101-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL101-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL101-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL101-RLD-7B-BR	1500	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL101-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL101-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL101-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1	4-3/4	4	3/16
IL101-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ FIXED GLIDES

1-1/4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides


The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

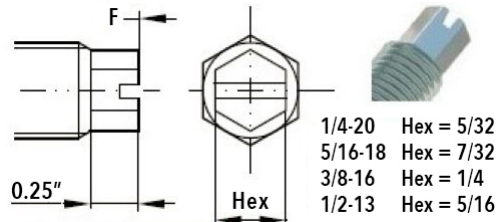

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.



Optional base colors.

Optional jam nut
(add -JN to part number) →



LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL102-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL102-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL102-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL102-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL102-RLD-4B-BR	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL102-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL102-RLD-5B-BR	400	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL102-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL102-RLD-6B-BR	750	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL102-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL102-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL102-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL102-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL102-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL102-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL102-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16
IL102-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES


SAUCER BASE™ FIXED GLIDES

1-1/2" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**



Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



Optional jam nut (add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20 Hex = 5/32
 5/16-18 Hex = 7/32
 3/8-16 Hex = 1/4
 1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
 Dimension table at bottom of page.

LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL103-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL103-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL103-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL103-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL103-RLD-4B-BR	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL103-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL103-RLD-5B-BR	400	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL103-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL103-RLD-6B-BR	750	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL103-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL103-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL103-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL103-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL103-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL103-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL103-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16
IL103-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ FIXED GLIDES

1-3/4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides


The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20 Hex = 5/32
 5/16-18 Hex = 7/32
 3/8-16 Hex = 1/4
 1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
 Dimension table at bottom of page.



Optional base colors.

Optional jam nut
 (add -JN to part number) →



LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL104-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-3/4	1-3/4	1	3/16
IL104-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-3/4	1-3/4	1	3/16
IL104-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-3/4	2-1/4	1-1/2	3/16
IL104-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-3/4	2-1/4	1-1/2	3/16
IL104-RLD-4B-BR	100	1/4-20	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-3/4	1-3/4	1	3/16
IL104-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-3/4	1-3/4	1	3/16
IL104-RLD-5B-BR	400	5/16-18	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-3/4	3-3/4	3	3/16
IL104-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-3/4	3-3/4	3	3/16
IL104-RLD-6B-BR	750	3/8-16	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-3/4	3-3/4	3	3/16
IL104-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-3/4	3-3/4	3	3/16
IL104-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-3/4	4-3/4	4	3/16
IL104-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-3/4	4-3/4	4	3/16
IL104-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-3/4	2-3/4	2	3/16
IL104-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-3/4	3-3/4	3	3/16
IL104-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-3/4	3-3/4	3	3/16
IL104-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-3/4	4-3/4	4	3/16
IL104-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-3/4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ FIXED GLIDES

2" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides


The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.



Optional jam nut
(add -JN to part number) →

LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL105-RLD-4BX1-BR	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL105-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL105-RLD-4BX15-BR	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL105-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL105-RLD-4B-BR	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-5BX1-BR	400	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL105-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL105-RLD-5B-BR	400	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-5BX3-BR	400	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL105-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL105-RLD-6B-BR	750	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-6BX3-BR	750	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL105-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL105-RLD-6BX4-BR	750	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL105-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL105-RLD-7B-BR	1500	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL105-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL105-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL105-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	2	4-3/4	4	3/16
IL105-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	2	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES


SAUCER BASE™ FIXED GLIDES

3" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**



Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL106-RLD-4BX1-BR	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL106-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL106-RLD-4BX15-BR	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL106-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL106-RLD-4B-BR	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-5BX1-BR	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL106-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL106-RLD-5B-BR	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-5BX3-BR	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL106-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL106-RLD-6B-BR	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-6BX3-BR	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL106-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL106-RLD-6BX4-BR	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL106-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL106-RLD-7B-BR	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL106-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL106-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL106-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL106-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this saucer base
design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES


SAUCER BASE™ FIXED GLIDES

4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Non-Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. Each base size has a 3/16" hex drive molded in the bottom for fast, easy installation into your furniture or equipment. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number). **More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.**

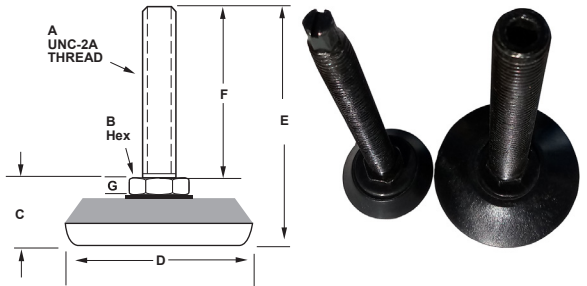

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- 3/16" bottom hex drive
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables




Optional base colors.

Optional jam nut (add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

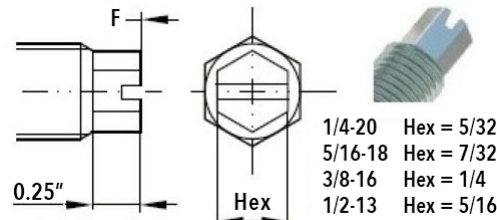

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

LOW PROFILE FIXED SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL107-RLD-4BX1-BR	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL107-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL107-RLD-4BX15-BR	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL107-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL107-RLD-4B-BR	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-5BX1-BR	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL107-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL107-RLD-5B-BR	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-5BX3-BR	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL107-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL107-RLD-6B-BR	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-6BX3-BR	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL107-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL107-RLD-6BX4-BR	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL107-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL107-RLD-7B-BR	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL107-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL107-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL107-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL107-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ FIXED GLIDES

3/4" to 4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Socket Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications.

These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with a bottom hex drive molded into the base. Steel socket and washer have black trivalent zinc plating.


Features

- Black trivalent zinc
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE FIXED SAUCER BASE — SOCKET GLIDES

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL100-RLD-4B-T	IL100-RLD-4BS-T	100	1/4-20	1/2	3/4	1/4	3/4	1/4
IL100-RLD-5B-T	IL100-RLD-5BS-T	400	5/16-18	1/2	3/4	3/8	7/8	1/4
IL100-RLD-6B-T	IL100-RLD-6BS-T	750	3/8-16	1/2	3/4	1/2	1	3/8
IL100-RLD-7B-T	IL100-RLD-7BS-T	1000	1/2-13	5/8	3/4	1/2	1	3/8
IL100-RLD-8B-T	IL100-RLD-8BS-T	1250	5/8-11	3/4	3/4	5/8	1-1/8	1/2
IL100-RLD-9B-T	IL100-RLD-9BS-T	1500	3/4-10	1	3/4	3/4	1-1/4	5/8
IL101-RLD-4B-T	IL101-RLD-4BS-T	100	1/4-20	1/2	1	1/4	3/4	1/4
IL101-RLD-5B-T	IL101-RLD-5BS-T	400	5/16-18	1/2	1	3/8	7/8	1/4
IL101-RLD-6B-T	IL101-RLD-6BS-T	750	3/8-16	1/2	1	1/2	1	3/8
IL101-RLD-7B-T	IL101-RLD-7BS-T	1000	1/2-13	5/8	1	1/2	1	3/8
IL101-RLD-8B-T	IL101-RLD-8BS-T	1250	5/8-11	3/4	1	5/8	1-1/8	1/2
IL101-RLD-9B-T	IL101-RLD-9BS-T	1500	3/4-10	1	1	3/4	1-1/4	5/8
IL102-RLD-4B-T	IL102-RLD-4BS-T	100	1/4-20	1/2	1-1/4	1/4	3/4	1/4
IL102-RLD-5B-T	IL102-RLD-5BS-T	400	5/16-18	1/2	1-1/4	3/8	7/8	1/4
IL102-RLD-6B-T	IL102-RLD-6BS-T	750	3/8-16	1/2	1-1/4	1/2	1	3/8
IL102-RLD-7B-T	IL102-RLD-7BS-T	1000	1/2-13	5/8	1-1/4	1/2	1	3/8
IL102-RLD-8B-T	IL102-RLD-8BS-T	1250	5/8-11	3/4	1-1/4	5/8	1-1/8	1/2
IL102-RLD-9B-T	IL102-RLD-9BS-T	1500	3/4-10	1	1-1/4	3/4	1-1/4	5/8
IL103-RLD-4B-T	IL103-RLD-4BS-T	100	1/4-20	1/2	1-1/2	1/4	3/4	1/4
IL103-RLD-5B-T	IL103-RLD-5BS-T	400	5/16-18	1/2	1-1/2	3/8	7/8	1/4
IL103-RLD-6B-T	IL103-RLD-6BS-T	750	3/8-16	1/2	1-1/2	1/2	1	3/8
IL103-RLD-7B-T	IL103-RLD-7BS-T	1000	1/2-13	5/8	1-1/2	1/2	1	3/8
IL103-RLD-8B-T	IL103-RLD-8BS-T	1250	5/8-11	3/4	1-1/2	5/8	1-1/8	1/2
IL103-RLD-9B-T	IL103-RLD-9BS-T	1500	3/4-10	1	1-1/2	3/4	1-1/4	5/8
IL104-RLD-4B-T	IL104-RLD-4BS-T	100	1/4-20	1/2	1-3/4	1/4	3/4	1/4
IL104-RLD-5B-T	IL104-RLD-5BS-T	400	5/16-18	1/2	1-3/4	3/8	7/8	1/4
IL104-RLD-6B-T	IL104-RLD-6BS-T	750	3/8-16	1/2	1-3/4	1/2	1	3/8
IL104-RLD-7B-T	IL104-RLD-7BS-T	1000	1/2-13	5/8	1-3/4	1/2	1	3/8
IL104-RLD-8B-T	IL104-RLD-8BS-T	1250	5/8-11	3/4	1-3/4	5/8	1-1/8	1/2
IL104-RLD-9B-T	IL104-RLD-9BS-T	1500	3/4-10	1	1-3/4	3/4	1-1/4	5/8
IL105-RLD-4B-T	IL105-RLD-4BS-T	100	1/4-20	1/2	2	1/4	3/4	1/4
IL105-RLD-5B-T	IL105-RLD-5BS-T	400	5/16-18	1/2	2	3/8	7/8	1/4
IL105-RLD-6B-T	IL105-RLD-6BS-T	750	3/8-16	1/2	2	1/2	1	3/8
IL105-RLD-7B-T	IL105-RLD-7BS-T	1000	1/2-13	5/8	2	1/2	1	3/8
IL105-RLD-8B-T	IL105-RLD-8BS-T	1250	5/8-11	3/4	2	5/8	1-1/8	1/2
IL105-RLD-9B-T	IL105-RLD-9BS-T	1500	3/4-10	1	2	3/4	1-1/4	5/8
IL106-RLD-4B-T	IL106-RLD-4BS-T	100	1/4-20	1/2	3	1/4	3/4	1/4
IL106-RLD-5B-T	IL106-RLD-5BS-T	400	5/16-18	1/2	3	3/8	7/8	1/4
IL106-RLD-6B-T	IL106-RLD-6BS-T	750	3/8-16	1/2	3	1/2	1	3/8
IL106-RLD-7B-T	IL106-RLD-7BS-T	1000	1/2-13	5/8	3	1/2	1	3/8
IL106-RLD-8B-T	IL106-RLD-8BS-T	1250	5/8-11	3/4	3	5/8	1-1/8	1/2
IL106-RLD-9B-T	IL106-RLD-9BS-T	1500	3/4-10	1	3	3/4	1-1/4	5/8
IL107-RLD-4B-T	IL107-RLD-4BS-T	100	1/4-20	1/2	4	1/4	3/4	1/4
IL107-RLD-5B-T	IL107-RLD-5BS-T	400	5/16-18	1/2	4	3/8	7/8	1/4
IL107-RLD-6B-T	IL107-RLD-6BS-T	750	3/8-16	1/2	4	1/2	1	3/8
IL107-RLD-7B-T	IL107-RLD-7BS-T	1000	1/2-13	5/8	4	1/2	1	3/8
IL107-RLD-8B-T	IL107-RLD-8BS-T	1250	5/8-11	3/4	4	5/8	1-1/8	1/2
IL107-RLD-9B-T	IL107-RLD-9BS-T	1500	3/4-10	1	4	3/4	1-1/4	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY – METRIC

SAUCER BASE™ FIXED GLIDES

3/4" to 4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Metric Socket Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Fixed Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D engineering design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with abottom hex drive molded into the base. Steel socket and washer have black trivalent zinc plating.


Features

- Black trivalent zinc
- Loads to 3000 lbs
- Corrosion resistant
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE FIXED — METRIC SOCKET GLIDES

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL100-RLD-M6B-T	IL100-RLD-M6BS-T	100	M6x1	1/2	3/4	1/4	3/4	1/4
IL100-RLD-M8B-T	IL100-RLD-M8BS-T	400	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL100-RLD-M10B-T	IL100-RLD-M10BS-T	750	M10x1.50	1/2	3/4	1/2	1	3/8
IL100-RLD-M12B-T	IL100-RLD-M12BS-T	1000	M12x1.75	5/8	3/4	1/2	1	3/8
IL100-RLD-M16B-T	IL100-RLD-M16BS-T	1250	M16x2.00	3/4	3/4	5/8	1-1/8	1/2
IL100-RLD-M20B-T	IL100-RLD-M20BS-T	1500	M20x3.00	1	3/4	3/4	1-1/4	5/8
IL101-RLD-M6B-T	IL101-RLD-M6BS-T	100	M6x1	1/2	1	1/4	3/4	1/4
IL101-RLD-M8B-T	IL101-RLD-M8BS-T	400	M8x1.25	1/2	1	3/8	7/8	1/4
IL101-RLD-M10B-T	IL101-RLD-M10BS-T	750	M10x1.50	1/2	1	1/2	1	3/8
IL101-RLD-M12B-T	IL101-RLD-M12BS-T	1000	M12x1.75	5/8	1	1/2	1	3/8
IL101-RLD-M16B-T	IL101-RLD-M16BS-T	1250	M16x2.00	3/4	1	5/8	1-1/8	1/2
IL101-RLD-M20B-T	IL101-RLD-M20BS-T	1500	M20x3.00	1	1	3/4	1-1/4	5/8
IL102-RLD-M6B-T	IL102-RLD-M6BS-T	100	M6x1	1/2	1-1/4	1/4	3/4	1/4
IL102-RLD-M8B-T	IL102-RLD-M8BS-T	400	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL102-RLD-M10B-T	IL102-RLD-M10BS-T	750	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL102-RLD-M12B-T	IL102-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL102-RLD-M16B-T	IL102-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/4	5/8	1-1/8	1/2
IL102-RLD-M20B-T	IL102-RLD-M20BS-T	1500	M20x3.00	1	1-1/4	3/4	1-1/4	5/8
IL103-RLD-M6B-T	IL103-RLD-M6BS-T	100	M6x1	1/2	1-1/2	1/4	3/4	1/4
IL103-RLD-M8B-T	IL103-RLD-M8BS-T	400	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL103-RLD-M10B-T	IL103-RLD-M10BS-T	750	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL103-RLD-M12B-T	IL103-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL103-RLD-M16B-T	IL103-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/2	5/8	1-1/8	1/2
IL103-RLD-M20B-T	IL103-RLD-M20BS-T	1500	M20x3.00	1	1-1/2	3/4	1-1/4	5/8
IL104-RLD-M6B-T	IL104-RLD-M6BS-T	100	M6x1	1/2	1-3/4	1/4	3/4	1/4
IL104-RLD-M8B-T	IL104-RLD-M8BS-T	400	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL104-RLD-M10B-T	IL104-RLD-M10BS-T	750	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL104-RLD-M12B-T	IL104-RLD-M12BS-T	1000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL104-RLD-M16B-T	IL104-RLD-M16BS-T	1250	M16x2.00	3/4	1-3/4	5/8	1-1/8	1/2
IL104-RLD-M20B-T	IL104-RLD-M20BS-T	1500	M20x3.00	1	1-3/4	3/4	1-1/4	5/8
IL105-RLD-M6B-T	IL105-RLD-M6BS-T	100	M6x1	1/2	2	1/4	3/4	1/4
IL105-RLD-M8B-T	IL105-RLD-M8BS-T	400	M8x1.25	1/2	2	3/8	7/8	1/4
IL105-RLD-M10B-T	IL105-RLD-M10BS-T	750	M10x1.50	1/2	2	1/2	1	3/8
IL105-RLD-M12B-T	IL105-RLD-M12BS-T	1000	M12x1.75	5/8	2	1/2	1	3/8
IL105-RLD-M16B-T	IL105-RLD-M16BS-T	1250	M16x2.00	3/4	2	5/8	1-1/8	1/2
IL105-RLD-M20B-T	IL105-RLD-M20BS-T	1500	M20x3.00	1	2	3/4	1-1/4	5/8
IL106-RLD-M6B-T	IL106-RLD-M6BS-T	100	M6x1	1/2	3	1/4	3/4	1/4
IL106-RLD-M8B-T	IL106-RLD-M8BS-T	400	M8x1.25	1/2	3	3/8	7/8	1/4
IL106-RLD-M10B-T	IL106-RLD-M10BS-T	750	M10x1.50	1/2	3	1/2	1	3/8
IL106-RLD-M12B-T	IL106-RLD-M12BS-T	1000	M12x1.75	5/8	3	1/2	1	3/8
IL106-RLD-M16B-T	IL106-RLD-M16BS-T	1250	M16x2.00	3/4	3	5/8	1-1/8	1/2
IL106-RLD-M20B-T	IL106-RLD-M20BS-T	1500	M20x3.00	1	3	3/4	1-1/4	5/8
IL107-RLD-M6B-T	IL107-RLD-M6BS-T	100	M6x1	1/2	4	1/4	3/4	1/4
IL107-RLD-M8B-T	IL107-RLD-M8BS-T	400	M8x1.25	1/2	4	3/8	7/8	1/4
IL107-RLD-M10B-T	IL107-RLD-M10BS-T	750	M10x1.50	1/2	4	1/2	1	3/8
IL107-RLD-M12B-T	IL107-RLD-M12BS-T	1000	M12x1.75	5/8	4	1/2	1	3/8
IL107-RLD-M16B-T	IL107-RLD-M16BS-T	1250	M16x2.00	3/4	4	5/8	1-1/8	1/2
IL107-RLD-M20B-T	IL107-RLD-M20BS-T	1500	M20x3.00	1	4	3/4	1-1/4	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ SWIVEL GLIDES

3/4" to 4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Socket Glides


The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**

Features

- Black trivalent zinc
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE SAUCER BASE — SWIVEL SOCKET GLIDES

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL110-RLD-4B-T	IL110-RLD-4BS-T	100	1/4-20	1/2	3/4	1/4	3/4	1/4
IL110-RLD-5B-T	IL110-RLD-5BS-T	400	5/16-18	1/2	3/4	3/8	7/8	1/4
IL110-RLD-6B-T	IL110-RLD-6BS-T	750	3/8-16	1/2	3/4	1/2	1	3/8
IL110-RLD-7B-T	IL110-RLD-7BS-T	1000	1/2-13	5/8	3/4	1/2	1	3/8
IL110-RLD-8B-T	IL110-RLD-8BS-T	1250	5/8-11	3/4	3/4	5/8	1-1/8	1/2
IL110-RLD-9B-T	IL110-RLD-9BS-T	1500	3/4-10	1	3/4	3/4	1-1/4	5/8
IL111-RLD-4B-T	IL111-RLD-4BS-T	100	1/4-20	1/2	1	1/4	3/4	1/4
IL111-RLD-5B-T	IL111-RLD-5BS-T	400	5/16-18	1/2	1	3/8	7/8	1/4
IL111-RLD-6B-T	IL111-RLD-6BS-T	750	3/8-16	1/2	1	1/2	1	3/8
IL111-RLD-7B-T	IL111-RLD-7BS-T	1000	1/2-13	5/8	1	1/2	1	3/8
IL111-RLD-8B-T	IL111-RLD-8BS-T	1250	5/8-11	3/4	1	5/8	1-1/8	1/2
IL111-RLD-9B-T	IL111-RLD-9BS-T	1500	3/4-10	1	1	3/4	1-1/4	5/8
IL112-RLD-4B-T	IL112-RLD-4BS-T	100	1/4-20	1/2	1-1/4	1/4	3/4	1/4
IL112-RLD-5B-T	IL112-RLD-5BS-T	400	5/16-18	1/2	1-1/4	3/8	7/8	1/4
IL112-RLD-6B-T	IL112-RLD-6BS-T	750	3/8-16	1/2	1-1/4	1/2	1	3/8
IL112-RLD-7B-T	IL112-RLD-7BS-T	1000	1/2-13	5/8	1-1/4	1/2	1	3/8
IL112-RLD-8B-T	IL112-RLD-8BS-T	1250	5/8-11	3/4	1-1/4	5/8	1-1/8	1/2
IL112-RLD-9B-T	IL112-RLD-9BS-T	1500	3/4-10	1	1-1/4	3/4	1-1/4	5/8
IL113-RLD-4B-T	IL113-RLD-4BS-T	100	1/4-20	1/2	1-1/2	1/4	3/4	1/4
IL113-RLD-5B-T	IL113-RLD-5BS-T	400	5/16-18	1/2	1-1/2	3/8	7/8	1/4
IL113-RLD-6B-T	IL113-RLD-6BS-T	750	3/8-16	1/2	1-1/2	1/2	1	3/8
IL113-RLD-7B-T	IL113-RLD-7BS-T	1000	1/2-13	5/8	1-1/2	1/2	1	3/8
IL113-RLD-8B-T	IL113-RLD-8BS-T	1250	5/8-11	3/4	1-1/2	5/8	1-1/8	1/2
IL113-RLD-9B-T	IL113-RLD-9BS-T	1500	3/4-10	1	1-1/2	3/4	1-1/4	5/8
IL114-RLD-4B-T	IL114-RLD-4BS-T	100	1/4-20	1/2	1-3/4	1/4	3/4	1/4
IL114-RLD-5B-T	IL114-RLD-5BS-T	400	5/16-18	1/2	1-3/4	3/8	7/8	1/4
IL114-RLD-6B-T	IL114-RLD-6BS-T	750	3/8-16	1/2	1-3/4	1/2	1	3/8
IL114-RLD-7B-T	IL114-RLD-7BS-T	1000	1/2-13	5/8	1-3/4	1/2	1	3/8
IL114-RLD-8B-T	IL114-RLD-8BS-T	1250	5/8-11	3/4	1-3/4	5/8	1-1/8	1/2
IL114-RLD-9B-T	IL114-RLD-9BS-T	1500	3/4-10	1	1-3/4	3/4	1-1/4	5/8
IL115-RLD-4B-T	IL115-RLD-4BS-T	100	1/4-20	1/2	2	1/4	3/4	1/4
IL115-RLD-5B-T	IL115-RLD-5BS-T	400	5/16-18	1/2	2	3/8	7/8	1/4
IL115-RLD-6B-T	IL115-RLD-6BS-T	750	3/8-16	1/2	2	1/2	1	3/8
IL115-RLD-7B-T	IL115-RLD-7BS-T	1000	1/2-13	5/8	2	1/2	1	3/8
IL115-RLD-8B-T	IL115-RLD-8BS-T	1250	5/8-11	3/4	2	5/8	1-1/8	1/2
IL115-RLD-9B-T	IL115-RLD-9BS-T	1500	3/4-10	1	2	3/4	1-1/4	5/8
IL116-RLD-4B-T	IL116-RLD-4BS-T	100	1/4-20	1/2	3	1/4	3/4	1/4
IL116-RLD-5B-T	IL116-RLD-5BS-T	400	5/16-18	1/2	3	3/8	7/8	1/4
IL116-RLD-6B-T	IL116-RLD-6BS-T	750	3/8-16	1/2	3	1/2	1	3/8
IL116-RLD-7B-T	IL116-RLD-7BS-T	1000	1/2-13	5/8	3	1/2	1	3/8
IL116-RLD-8B-T	IL116-RLD-8BS-T	1250	5/8-11	3/4	3	5/8	1-1/8	1/2
IL116-RLD-9B-T	IL116-RLD-9BS-T	1500	3/4-10	1	3	3/4	1-1/4	5/8
IL117-RLD-4B-T	IL117-RLD-4BS-T	100	1/4-20	1/2	4	1/4	3/4	1/4
IL117-RLD-5B-T	IL117-RLD-5BS-T	400	5/16-18	1/2	4	3/8	7/8	1/4
IL117-RLD-6B-T	IL117-RLD-6BS-T	750	3/8-16	1/2	4	1/2	1	3/8
IL117-RLD-7B-T	IL117-RLD-7BS-T	1000	1/2-13	5/8	4	1/2	1	3/8
IL117-RLD-8B-T	IL117-RLD-8BS-T	1250	5/8-11	3/4	4	5/8	1-1/8	1/2
IL117-RLD-9B-T	IL117-RLD-9BS-T	1500	3/4-10	1	4	3/4	1-1/4	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY – METRIC

SAUCER BASE™ SWIVEL GLIDES

3/4" to 4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Saucer Base™ Metric Swivel Socket Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Low-Profile Metric Swivel Socket Glides have a curved bottom edge design for improved sliding capability and are ideal for medium duty, high volume applications. These levelers use advanced 3D design. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick. The socket swivels approximately 15 degrees from centerline. **Steel socket has black trivalent zinc plating.**


Features

- Black trivalent zinc
- Loads to 1500 lbs
- Corrosion resistant
- 8 base diameters
- Glass-filled nylon
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n. To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

- Conveyors
- Machinery
- Work tables



OPTIONAL BASE COLORS



LOW PROFILE SAUCER BASE — METRIC SWIVEL SOCKET GLIDES

Steel	Stainless	Load	Thread	Hex	A	B	C	F
IL110-RLD-M6B-T	IL110-RLD-M6BS-T	100	M6x1	1/2	3/4	1/4	3/4	1/4
IL110-RLD-M8B-T	IL110-RLD-M8BS-T	400	M8x1.25	1/2	3/4	3/8	7/8	1/4
IL110-RLD-M10B-T	IL110-RLD-M10BS-T	750	M10x1.50	1/2	3/4	1/2	1	3/8
IL110-RLD-M12B-T	IL110-RLD-M12S-T	1000	M12x1.75	5/8	3/4	1/2	1	3/8
IL110-RLD-M16B-T	IL110-RLD-M16BS-T	1250	M16x2.00	3/4	3/4	5/8	1-1/8	1/2
IL110-RLD-M20B-T	IL110-RLD-M20BS-T	1500	M20x3.00	1	3/4	3/4	1-1/4	5/8
IL111-RLD-M6B-T	IL111-RLD-M6BS-T	100	M6x1	1/2	1	1/4	3/4	1/4
IL111-RLD-M8B-T	IL111-RLD-M8BS-T	400	M8x1.25	1/2	1	3/8	7/8	1/4
IL111-RLD-M10B-T	IL111-RLD-M10BS-T	750	M10x1.50	1/2	1	1/2	1	3/8
IL111-RLD-M12B-T	IL111-RLD-M12BS-T	1000	M12x1.75	5/8	1	1/2	1	3/8
IL111-RLD-M16B-T	IL111-RLD-M16BS-T	1250	M16x2.00	3/4	1	5/8	1-1/8	1/2
IL111-RLD-M20B-T	IL111-RLD-M20BS-T	1500	M20x3.00	1	1	3/4	1-1/4	5/8
IL112-RLD-M6B-T	IL112-RLD-M6BS-T	100	M6x1	1/2	1-1/4	1/4	3/4	1/4
IL112-RLD-M8B-T	IL112-RLD-M8BS-T	400	M8x1.25	1/2	1-1/4	3/8	7/8	1/4
IL112-RLD-M10B-T	IL112-RLD-M10BS-T	750	M10x1.50	1/2	1-1/4	1/2	1	3/8
IL112-RLD-M12B-T	IL112-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/4	1/2	1	3/8
IL112-RLD-M16B-T	IL112-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/4	5/8	1-1/8	1/2
IL112-RLD-M20B-T	IL112-RLD-M20BS-T	1500	M20x3.00	1	1-1/4	3/4	1-1/4	5/8
IL113-RLD-M6B-T	IL113-RLD-M6BS-T	100	M6x1	1/2	1-1/2	1/4	3/4	1/4
IL113-RLD-M8B-T	IL113-RLD-M8BS-T	400	M8x1.25	1/2	1-1/2	3/8	7/8	1/4
IL113-RLD-M10B-T	IL113-RLD-M10BS-T	750	M10x1.50	1/2	1-1/2	1/2	1	3/8
IL113-RLD-M12B-T	IL113-RLD-M12BS-T	1000	M12x1.75	5/8	1-1/2	1/2	1	3/8
IL113-RLD-M16B-T	IL113-RLD-M16BS-T	1250	M16x2.00	3/4	1-1/2	5/8	1-1/8	1/2
IL113-RLD-M20B-T	IL113-RLD-M20BS-T	1500	M20x3.00	1	1-1/2	3/4	1-1/4	5/8
IL114-RLD-M6B-T	IL114-RLD-M6BS-T	100	M6x1	1/2	1-3/4	1/4	3/4	1/4
IL114-RLD-M8B-T	IL114-RLD-M8BS-T	400	M8x1.25	1/2	1-3/4	3/8	7/8	1/4
IL114-RLD-M10B-T	IL114-RLD-M10BS-T	750	M10x1.50	1/2	1-3/4	1/2	1	3/8
IL114-RLD-M12B-T	IL114-RLD-M12BS-T	1000	M12x1.75	5/8	1-3/4	1/2	1	3/8
IL114-RLD-M16B-T	IL114-RLD-M16BS-T	1250	M16x2.00	3/4	1-3/4	5/8	1-1/8	1/2
IL114-RLD-M20B-T	IL114-RLD-M20BS-T	1500	M20x3.00	1	1-3/4	3/4	1-1/4	5/8
IL115-RLD-M6B-T	IL115-RLD-M6BS-T	100	M6x1	1/2	2	1/4	3/4	1/4
IL115-RLD-M8B-T	IL115-RLD-M8BS-T	400	M8x1.25	1/2	2	3/8	7/8	1/4
IL115-RLD-M10B-T	IL115-RLD-M10BS-T	750	M10x1.50	1/2	2	1/2	1	3/8
IL115-RLD-M12B-T	IL115-RLD-M12BS-T	1000	M12x1.75	5/8	2	1/2	1	3/8
IL115-RLD-M16B-T	IL115-RLD-M16BS-T	1250	M16x2.00	3/4	2	5/8	1-1/8	1/2
IL115-RLD-M20B-T	IL115-RLD-M20BS-T	1500	M20x3.00	1	2	3/4	1-1/4	5/8
IL116-RLD-M6B-T	IL116-RLD-M6BS-T	100	M6x1	1/2	3	1/4	3/4	1/4
IL116-RLD-M8B-T	IL116-RLD-M8BS-T	400	M8x1.25	1/2	3	3/8	7/8	1/4
IL116-RLD-M10B-T	IL116-RLD-M10BS-T	750	M10x1.50	1/2	3	1/2	1	3/8
IL116-RLD-M12B-T	IL116-RLD-M12BS-T	1000	M12x1.75	5/8	3	1/2	1	3/8
IL116-RLD-M16B-T	IL116-RLD-M16BS-T	1250	M16x2.00	3/4	3	5/8	1-1/8	1/2
IL116-RLD-M20B-T	IL116-RLD-M20BS-T	1500	M20x3.00	1	3	3/4	1-1/4	5/8
IL117-RLD-M6B-T	IL117-RLD-M6BS-T	100	M6x1	1/2	4	1/4	3/4	1/4
IL117-RLD-M8B-T	IL117-RLD-M8BS-T	400	M8x1.25	1/2	4	3/8	7/8	1/4
IL117-RLD-M10B-T	IL117-RLD-M10BS-T	750	M10x1.50	1/2	4	1/2	1	3/8
IL117-RLD-M12B-T	IL117-RLD-M12BS-T	1000	M12x1.75	5/8	4	1/2	1	3/8
IL117-RLD-M16B-T	IL117-RLD-M16BS-T	1250	M16x2.00	3/4	4	5/8	1-1/8	1/2
IL117-RLD-M20B-T	IL117-RLD-M20BS-T	1500	M20x3.00	1	4	3/4	1-1/4	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ SWIVEL GLIDES

3/4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).


More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

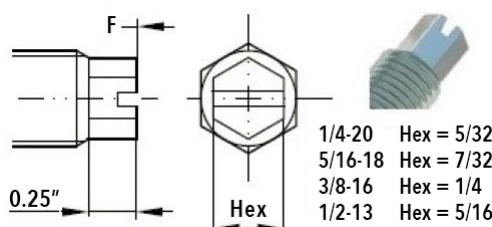


1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

Optional jam nut (add -JN to part number) →



Optional base colors.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL110-RDL-4BX1-BR	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL110-RDL-4BX1-HX-SL	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL110-RDL-4BX15-BR	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL110-RDL-4BX15-HX-SL	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL110-RDL-4B-BR	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-4B-HX-SL	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-5BX1-BR	400	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL110-RDL-5BX1-HX-SL	400	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL110-RDL-5B-BR	400	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-5B-HX-SL	400	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-5BX3-BR	400	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL110-RDL-5BX3-HX-SL	400	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL110-RDL-6B-BR	750	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-6B-HX-SL	750	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-6BX3-BR	750	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL110-RDL-6BX3-HX-SL	750	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL110-RDL-6BX4-BR	750	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL110-RDL-6BX4-HX-SL	750	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL110-RDL-7B-BR	1500	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-7B-HX-SL	1500	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL110-RDL-7BX3-BR	1500	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL110-RDL-7BX3-HX-SL	1500	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL110-RDL-7BX4-BR	1500	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16
IL110-RDL-7BX4-HX-SL	1500	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ SWIVEL GLIDES

1" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).


More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

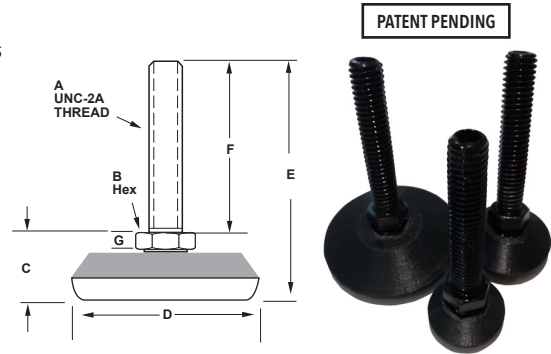


Optional base colors.


Optional jam nut
(add -JN to part number) →



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

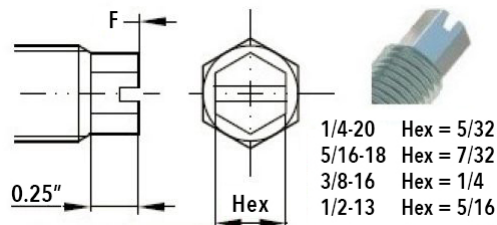

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL111-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL111-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL111-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL111-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL111-RLD-4B-BR	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL111-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL111-RLD-5B-BR	400	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL111-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL111-RLD-6B-BR	750	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL111-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL111-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL111-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL111-RLD-7B-BR	1500	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL111-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL111-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL111-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1	4-3/4	4	3/16
IL111-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this saucer base
design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES**SAUCER BASE™ SWIVEL GLIDES**

1-1/4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.



Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →

**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL112-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL112-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL112-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL112-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL112-RLD-4B-BR	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL112-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL112-RLD-5B-BR	400	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL112-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL112-RLD-6B-BR	750	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL112-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL112-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL112-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL112-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL112-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL112-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL112-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16
IL112-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



Optional base colors.

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this saucer base
design in IEC's
Medium-Duty
Leveler catalog.

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES**SAUCER BASE™ SWIVEL GLIDES**

1-1/2" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).



More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

Optional jam nut (add -JN to part number) →



Optional base colors.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL113-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL113-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL113-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL113-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL113-RLD-4B-BR	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL113-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL113-RLD-5B-BR	400	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL113-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL113-RLD-6B-BR	750	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL113-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL113-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL113-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL113-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL113-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL113-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL113-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16
IL113-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES**SAUCER BASE™ SWIVEL GLIDES**

1-3/4" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).



More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
 5/16-18 Hex = 7/32
 3/8-16 Hex = 1/4
 1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
 Dimension table at bottom of page.

Optional jam nut (add -JN to part number) →



Optional base colors.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL114-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-3/4	1-3/4	1	3/16
IL114-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-3/4	1-3/4	1	3/16
IL114-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-3/4	2-1/4	1-1/2	3/16
IL114-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-3/4	2-1/4	1-1/2	3/16
IL114-RLD-4B-BR	100	1/4-20	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-3/4	1-3/4	1	3/16
IL114-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-3/4	1-3/4	1	3/16
IL114-RLD-5B-BR	400	5/16-18	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-3/4	3-3/4	3	3/16
IL114-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-3/4	3-3/4	3	3/16
IL114-RLD-6B-BR	750	3/8-16	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-3/4	3-3/4	3	3/16
IL114-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-3/4	3-3/4	3	3/16
IL114-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-3/4	4-3/4	4	3/16
IL114-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-3/4	4-3/4	4	3/16
IL114-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-3/4	2-3/4	2	3/16
IL114-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-3/4	3-3/4	3	3/16
IL114-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-3/4	3-3/4	3	3/16
IL114-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-3/4	4-3/4	4	3/16
IL114-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-3/4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

SAUCER BASE™ SWIVEL GLIDES

2" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).


More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

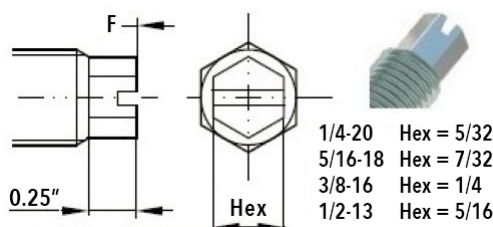

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

Optional jam nut (add -JN to part number) →



Optional base colors.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL115-RLD-4BX1-BR	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL115-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL115-RLD-4BX15-BR	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL115-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL115-RLD-4B-BR	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-5BX1-BR	400	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL115-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL115-RLD-5B-BR	400	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-5BX3-BR	400	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL115-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL115-RLD-6B-BR	750	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-6BX3-BR	750	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL115-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL115-RLD-6BX4-BR	750	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL115-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL115-RLD-7B-BR	1500	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL115-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL115-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL115-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	2	4-3/4	4	3/16
IL115-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	2	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES**SAUCER BASE™ SWIVEL GLIDES**

3" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).


More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.
- To order metallic gray, add -GY to p/n.

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



Optional jam nut
(add -JN to part number) →



Optional base colors.

TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL116-RLD-4BX1-BR	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL116-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL116-RLD-4BX15-BR	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL116-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL116-RLD-4B-BR	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-5BX1-BR	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL116-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL116-RLD-5B-BR	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-5BX3-BR	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL116-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL116-RLD-6B-BR	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-6BX3-BR	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL116-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL116-RLD-6BX4-BR	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL116-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL116-RLD-7B-BR	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL116-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL116-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL116-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL116-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Ruggedized™ Light Duty (RLD) Low-Profile, Saucer Base™ Swivel Glides

The IEC Saucer Base™ Ruggedized™ Light Duty (RLD) Swivel Glides have a curved bottom edge design for improved sliding capability and are ideal for light to medium duty, high volume applications. The RLD series glides use advanced 3D engineering design and composite materials to create a rugged glide, lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes to choose from: 3/4" to 4", 1/2" thick with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant
- Curved bottom edge for improved sliding
- Black base standard, to order wood brown, add -BN to p/n.


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables


Optional jam nut (add -JN to part number) →




Optional base colors.



PATENT PENDING

**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

LOW PROFILE SWIVEL SAUCER BASE — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL117-RLD-4BX1-BR	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL117-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL117-RLD-4BX15-BR	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL117-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL117-RLD-4B-BR	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-5BX1-BR	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL117-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL117-RLD-5B-BR	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-5BX3-BR	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL117-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL117-RLD-6B-BR	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-6BX3-BR	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL117-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL117-RLD-6BX4-BR	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL117-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL117-RLD-7B-BR	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL117-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL117-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL117-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL117-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, FIXED STUD

1" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Fixed Stud Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Fixed Stud Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 3", 3/8" thick. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- Non-swivel fixed base
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut


(add -JN to part number) →




Optional bottom chamfer (reverse assembly) – with 90° top edge

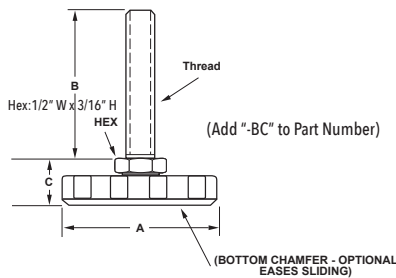


Poly Fixed Socket/Stud with Rubber Pad (Pad Bottom View)

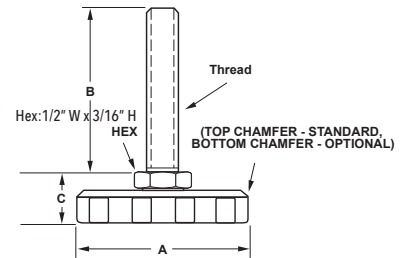

TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

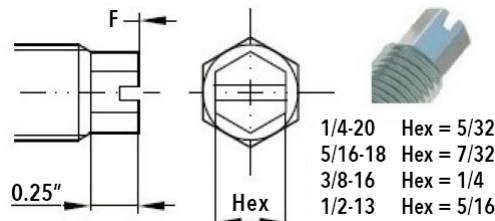

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

Steel	Steel with Rubber Pad	Load	Thread	A	B	C
IL7-RLD-4BX1-BR	IL7-RLD-4BX1-BR-P	100	1/4-20	1	1	5/8
IL7-RLD-4BX1-HX-SL	IL7-RLD-4BX1-HX-SL-P	100	1/4-20	1	1	5/8
IL7-RLD-4BX15-BR	IL7-RLD-4BX15-BR-P	100	1/4-20	1	1-1/2	5/8
IL7-RLD-4BX15-HX-SL	IL7-RLD-4BX15-HX-SL-P	100	1/4-20	1	1-1/2	5/8
IL7-RLD-4B-BR	IL7-RLD-4B-BR-P	100	1/4-20	1	2	5/8
IL7-RLD-4B-HX-SL	IL7-RLD-4B-HX-SL-P	100	1/4-20	1	2	5/8
IL7-RLD-5BX1-BR	IL7-RLD-5BX1-BR-P	400	5/16-18	1	1	5/8
IL7-RLD-5BX1-HX-SL	IL7-RLD-5BX1-HX-SL-P	400	5/16-18	1	1	5/8
IL7-RLD-5B-BR	IL7-RLD-5B-BR-P	400	5/16-18	1	2	5/8
IL7-RLD-5B-HX-SL	IL7-RLD-5B-HX-SL-P	400	5/16-18	1	2	5/8
IL7-RLD-5BX3-BR	IL7-RLD-5BX3-BR-P	400	5/16-18	1	3	5/8
IL7-RLD-5BX3-HX-SL	IL7-RLD-5BX3-HX-SL-P	400	5/16-18	1	3	5/8
IL7-RLD-6B-BR	IL7-RLD-6B-BR-P	750	3/8-16	1	2	5/8
IL7-RLD-6B-HX-SL	IL7-RLD-6B-HX-SL-P	750	3/8-16	1	2	5/8
IL7-RLD-6BX3-BR	IL7-RLD-6BX3-BR-P	750	3/8-16	1	3	5/8
IL7-RLD-6BX3-HX-SL	IL7-RLD-6BX3-HX-SL-P	750	3/8-16	1	3	5/8
IL7-RLD-6BX4-BR	IL7-RLD-6BX4-BR-P	750	3/8-16	1	4	5/8
IL7-RLD-6BX4-HX-SL	IL7-RLD-6BX4-HX-SL-P	750	3/8-16	1	4	5/8
IL7-RLD-7B-BR	IL7-RLD-7B-BR-P	1500	1/2-13	1	2	5/8
IL7-RLD-7B-HX-SL	IL7-RLD-7B-HX-SL-P	1500	1/2-13	1	2	5/8
IL7-RLD-7BX3-BR	IL7-RLD-7BX3-BR-P	1500	1/2-13	1	3	5/8
IL7-RLD-7BX3-HX-SL	IL7-RLD-7BX3-HX-SL-P	1500	1/2-13	1	3	5/8
IL7-RLD-7BX4-BR	IL7-RLD-7BX4-BR-P	1500	1/2-13	1	4	5/8
IL7-RLD-7BX4-HX-SL	IL7-RLD-7BX4-HX-SL-P	1500	1/2-13	1	4	5/8

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty Leveler catalog.

More thread sizes and length options for this poly fixed base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, FIXED STUD

1-1/2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Fixed Stud Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Fixed Stud Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 3", 3/8" thick. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- Non-swivel fixed base
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables


Optional jam nut
(add -JN to part number) →




Optional bottom chamfer (reverse assembly) – with 90° top edge

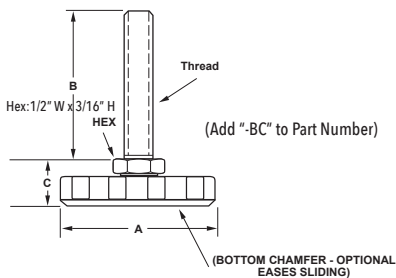


Poly Fixed Socket/Stud with Rubber Pad (Pad Bottom View)

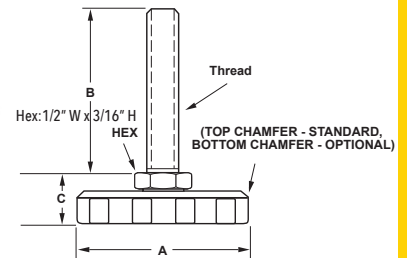

TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

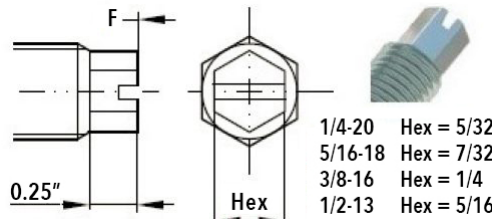

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

Steel	Steel with Rubber Pad	Load	Thread	A	B	C
IL8-RLD-4BX1-BR	IL8-RLD-4BX1-BR-P	100	1/4-20	1-1/2	1	5/8
IL8-RLD-4BX1-HX-SL	IL8-RLD-4BX1-HX-SL-P	100	1/4-20	1-1/2	1	5/8
IL8-RLD-4BX15-BR	IL8-RLD-4BX15-BR-P	100	1/4-20	1-1/2	1-1/2	5/8
IL8-RLD-4BX15-HX-SL	IL8-RLD-4BX15-HX-SL-P	100	1/4-20	1-1/2	1-1/2	5/8
IL8-RLD-4B-BR	IL8-RLD-4B-BR-P	100	1/4-20	1-1/2	2	5/8
IL8-RLD-4B-HX-SL	IL8-RLD-4B-HX-SL-P	100	1/4-20	1-1/2	2	5/8
IL8-RLD-5BX1-BR	IL8-RLD-5BX1-BR-P	400	5/16-18	1-1/2	1	5/8
IL8-RLD-5BX1-HX-SL	IL8-RLD-5BX1-HX-SL-P	400	5/16-18	1-1/2	1	5/8
IL8-RLD-5B-BR	IL8-RLD-5B-BR-P	400	5/16-18	1-1/2	2	5/8
IL8-RLD-5B-HX-SL	IL8-RLD-5B-HX-SL-P	400	5/16-18	1-1/2	2	5/8
IL8-RLD-5BX3-BR	IL8-RLD-5BX3-BR-P	400	5/16-18	1-1/2	3	5/8
IL8-RLD-5BX3-HX-SL	IL8-RLD-5BX3-HX-SL-P	400	5/16-18	1-1/2	3	5/8
IL8-RLD-6B-BR	IL8-RLD-6B-BR-P	750	3/8-16	1-1/2	2	5/8
IL8-RLD-6B-HX-SL	IL8-RLD-6B-HX-SL-P	750	3/8-16	1-1/2	2	5/8
IL8-RLD-6BX3-BR	IL8-RLD-6BX3-BR-P	750	3/8-16	1-1/2	3	5/8
IL8-RLD-6BX3-HX-SL	IL8-RLD-6BX3-HX-SL-P	750	3/8-16	1-1/2	3	5/8
IL8-RLD-6BX4-BR	IL8-RLD-6BX4-BR-P	750	3/8-16	1-1/2	4	5/8
IL8-RLD-6BX4-HX-SL	IL8-RLD-6BX4-HX-SL-P	750	3/8-16	1-1/2	4	5/8
IL8-RLD-7B-BR	IL8-RLD-7B-BR-P	1500	1/2-13	1-1/2	2	5/8
IL8-RLD-7B-HX-SL	IL8-RLD-7B-HX-SL-P	1500	1/2-13	1-1/2	2	5/8
IL8-RLD-7BX3-BR	IL8-RLD-7BX3-BR-P	1500	1/2-13	1-1/2	3	5/8
IL8-RLD-7BX3-HX-SL	IL8-RLD-7BX3-HX-SL-P	1500	1/2-13	1-1/2	3	5/8
IL8-RLD-7BX4-BR	IL8-RLD-7BX4-BR-P	1500	1/2-13	1-1/2	4	5/8
IL8-RLD-7BX4-HX-SL	IL8-RLD-7BX4-HX-SL-P	1500	1/2-13	1-1/2	4	5/8

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty Leveler catalog.

More thread sizes
and length options
for this poly fixed
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, FIXED STUD

2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Fixed Stud Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Fixed Stud Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slot-hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 3", 3/8" thick. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- Non-swivel fixed base
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables


Optional jam nut
(add -JN to part number) →




Optional bottom chamfer (reverse assembly) – with 90° top edge

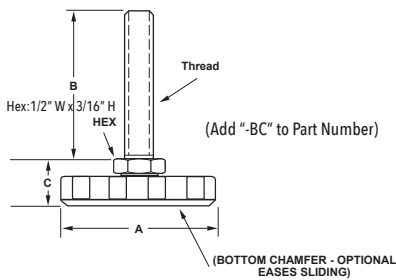


Poly Fixed Socket/Stud with Rubber Pad (Pad Bottom View)

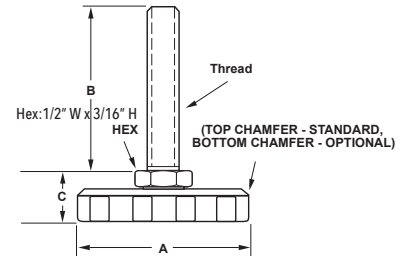

TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

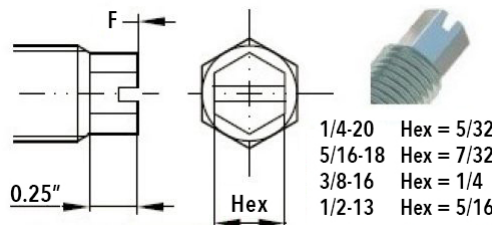

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

Steel	Steel with Rubber Pad	Load	Thread	A	B	C
IL7A-RLD-4BX1-BR	IL7A-RLD-4BX1-BR-P	100	1/4-20	2	1	5/8
IL7A-RLD-4BX1-HX-SL	IL7A-RLD-4BX1-HX-SL-P	100	1/4-20	2	1	5/8
IL7A-RLD-4BX15-BR	IL7A-RLD-4BX15-BR-P	100	1/4-20	2	1-1/2	5/8
IL7A-RLD-4BX15-HX-SL	IL7A-RLD-4BX15-HX-SL-P	100	1/4-20	2	1-1/2	5/8
IL7A-RLD-4B-BR	IL7A-RLD-4B-BR-P	100	1/4-20	2	2	5/8
IL7A-RLD-4B-HX-SL	IL7A-RLD-4B-HX-SL-P	100	1/4-20	2	2	5/8
IL7A-RLD-5BX1-BR	IL7A-RLD-5BX1-BR-P	400	5/16-18	2	1	5/8
IL7A-RLD-5BX1-HX-SL	IL7A-RLD-5BX1-HX-SL-P	400	5/16-18	2	1	5/8
IL7A-RLD-5B-BR	IL7A-RLD-5B-BR-P	400	5/16-18	2	2	5/8
IL7A-RLD-5B-HX-SL	IL7A-RLD-5B-HX-SL-P	400	5/16-18	2	2	5/8
IL7A-RLD-5BX3-BR	IL7A-RLD-5BX3-BR-P	400	5/16-18	2	3	5/8
IL7A-RLD-5BX3-HX-SL	IL7A-RLD-5BX3-HX-SL-P	400	5/16-18	2	3	5/8
IL7A-RLD-6B-BR	IL7A-RLD-6B-BR-P	750	3/8-16	2	2	5/8
IL7A-RLD-6B-HX-SL	IL7A-RLD-6B-HX-SL-P	750	3/8-16	2	2	5/8
IL7A-RLD-6BX3-BR	IL7A-RLD-6BX3-BR-P	750	3/8-16	2	3	5/8
IL7A-RLD-6BX3-HX-SL	IL7A-RLD-6BX3-HX-SL-P	750	3/8-16	2	3	5/8
IL7A-RLD-6BX4-BR	IL7A-RLD-6BX4-BR-P	750	3/8-16	2	4	5/8
IL7A-RLD-6BX4-HX-SL	IL7A-RLD-6BX4-HX-SL-P	750	3/8-16	2	4	5/8
IL7A-RLD-7B-BR	IL7A-RLD-7B-BR-P	1500	1/2-13	2	2	5/8
IL7A-RLD-7B-HX-SL	IL7A-RLD-7B-HX-SL-P	1500	1/2-13	2	2	5/8
IL7A-RLD-7BX3-BR	IL7A-RLD-7BX3-BR-P	1500	1/2-13	2	3	5/8
IL7A-RLD-7BX3-HX-SL	IL7A-RLD-7BX3-HX-SL-P	1500	1/2-13	2	3	5/8
IL7A-RLD-7BX4-BR	IL7A-RLD-7BX4-BR-P	1500	1/2-13	2	4	5/8
IL7A-RLD-7BX4-HX-SL	IL7A-RLD-7BX4-HX-SL-P	1500	1/2-13	2	4	5/8

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty Leveler catalog.

More thread sizes
and length options
for this poly fixed
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size							
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, FIXED STUD

2-1/2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Fixed Stud Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Fixed Stud Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slot-ted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 3", 3/8" thick. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- Non-swivel fixed base
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →

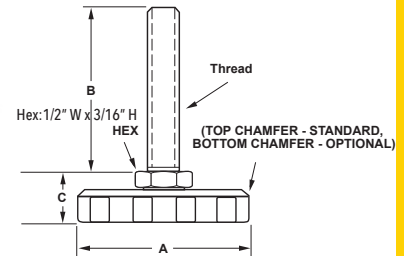


TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

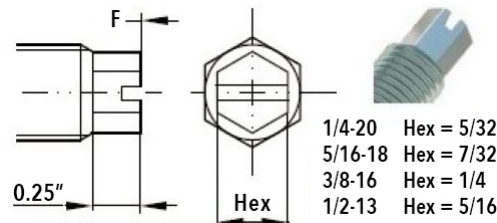


1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

Optional bottom chamfer (reverse assembly) – with 90° top edge

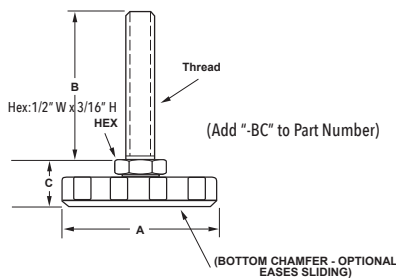

Poly Fixed Socket/Stud with Rubber Pad (Pad Bottom View)

Steel	Steel with Rubber Pad	Load	Thread	A	B	C
IL7M-RDL-4BX1-BR	IL7M-RDL-4BX1-BR-P	100	1/4-20	2-1/2	1	5/8
IL7M-RDL-4BX1-HX-SL	IL7M-RDL-4BX1-HX-SL-P	100	1/4-20	2-1/2	1	5/8
IL7M-RDL-4BX15-BR	IL7M-RDL-4BX15-BR-P	100	1/4-20	2-1/2	1-1/2	5/8
IL7M-RDL-4BX15-HX-SL	IL7M-RDL-4BX15-HX-SL-P	100	1/4-20	2-1/2	1-1/2	5/8
IL7M-RDL-4B-BR	IL7M-RDL-4B-BR-P	100	1/4-20	2-1/2	2	5/8
IL7M-RDL-4B-HX-SL	IL7M-RDL-4B-HX-SL-P	100	1/4-20	2-1/2	2	5/8
IL7M-RDL-5BX1-BR	IL7M-RDL-5BX1-BR-P	400	5/16-18	2-1/2	1	5/8
IL7M-RDL-5BX1-HX-SL	IL7M-RDL-5BX1-HX-SL-P	400	5/16-18	2-1/2	1	5/8
IL7M-RDL-5B-BR	IL7M-RDL-5B-BR-P	400	5/16-18	2-1/2	2	5/8
IL7M-RDL-5B-HX-SL	IL7M-RDL-5B-HX-SL-P	400	5/16-18	2-1/2	2	5/8
IL7M-RDL-5BX3-BR	IL7M-RDL-5BX3-BR-P	400	5/16-18	2-1/2	3	5/8
IL7M-RDL-5BX3-HX-SL	IL7M-RDL-5BX3-HX-SL-P	400	5/16-18	2-1/2	3	5/8
IL7M-RDL-6B-BR	IL7M-RDL-6B-BR-P	750	3/8-16	2-1/2	2	5/8
IL7M-RDL-6B-HX-SL	IL7M-RDL-6B-HX-SL-P	750	3/8-16	2-1/2	2	5/8
IL7M-RDL-6BX3-BR	IL7M-RDL-6BX3-BR-P	750	3/8-16	2-1/2	3	5/8
IL7M-RDL-6BX3-HX-SL	IL7M-RDL-6BX3-HX-SL-P	750	3/8-16	2-1/2	3	5/8
IL7M-RDL-6BX4-BR	IL7M-RDL-6BX4-BR-P	750	3/8-16	2-1/2	4	5/8
IL7M-RDL-6BX4-HX-SL	IL7M-RDL-6BX4-HX-SL-P	750	3/8-16	2-1/2	4	5/8
IL7M-RDL-7B-BR	IL7M-RDL-7B-BR-P	1500	1/2-13	2-1/2	2	5/8
IL7M-RDL-7B-HX-SL	IL7M-RDL-7B-HX-SL-P	1500	1/2-13	2-1/2	2	5/8
IL7M-RDL-7BX3-BR	IL7M-RDL-7BX3-BR-P	1500	1/2-13	2-1/2	3	5/8
IL7M-RDL-7BX3-HX-SL	IL7M-RDL-7BX3-HX-SL-P	1500	1/2-13	2-1/2	3	5/8
IL7M-RDL-7BX4-BR	IL7M-RDL-7BX4-BR-P	1500	1/2-13	2-1/2	4	5/8
IL7M-RDL-7BX4-HX-SL	IL7M-RDL-7BX4-HX-SL-P	1500	1/2-13	2-1/2	4	5/8

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty Leveler catalog.

More thread sizes
and length options
for this poly fixed
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, FIXED STUD

3" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Fixed Stud Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Fixed Stud Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slot-ted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 3", 3/8" thick. Steel stud and washer with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- Non-swivel fixed base
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



Optional jam nut
(add -JN to part number) →




Optional bottom chamfer (reverse assembly) – with 90° top edge

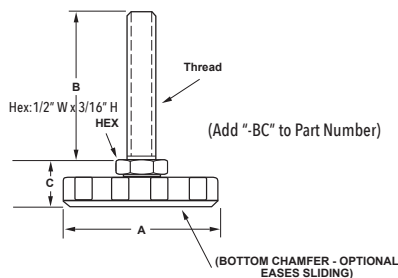

Poly Fixed Socket/Stud with Rubber Pad (Pad Bottom View)

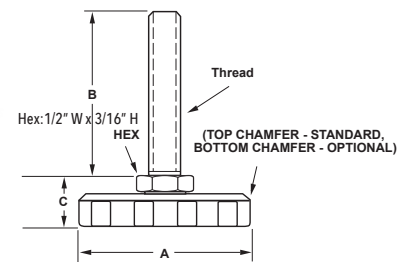**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

Steel	Steel with Rubber Pad	Load	Thread	A	B	C
IL8A-RLD-4BX1-BR	IL8A-RLD-4BX1-BR-P	100	1/4-20	3	1	5/8
IL8A-RLD-4BX1-HX-SL	IL8A-RLD-4BX1-HX-SL-P	100	1/4-20	3	1	5/8
IL8A-RLD-4BX15-BR	IL8A-RLD-4BX15-BR-P	100	1/4-20	3	1-1/2	5/8
IL8A-RLD-4BX15-HX-SL	IL8A-RLD-4BX15-HX-SL-P	100	1/4-20	3	1-1/2	5/8
IL8A-RLD-4B-BR	IL8A-RLD-4B-BR-P	100	1/4-20	3	2	5/8
IL8A-RLD-4B-HX-SL	IL8A-RLD-4B-HX-SL-P	100	1/4-20	3	2	5/8
IL8A-RLD-5BX1-BR	IL8A-RLD-5BX1-BR-P	400	5/16-18	3	1	5/8
IL8A-RLD-5BX1-HX-SL	IL8A-RLD-5BX1-HX-SL-P	400	5/16-18	3	1	5/8
IL8A-RLD-5B-BR	IL8A-RLD-5B-BR-P	400	5/16-18	3	2	5/8
IL8A-RLD-5B-HX-SL	IL8A-RLD-5B-HX-SL-P	400	5/16-18	3	2	5/8
IL8A-RLD-5BX3-BR	IL8A-RLD-5BX3-BR-P	400	5/16-18	3	3	5/8
IL8A-RLD-5BX3-HX-SL	IL8A-RLD-5BX3-HX-SL-P	400	5/16-18	3	3	5/8
IL8A-RLD-6B-BR	IL8A-RLD-6B-BR-P	750	3/8-16	3	2	5/8
IL8A-RLD-6B-HX-SL	IL8A-RLD-6B-HX-SL-P	750	3/8-16	3	2	5/8
IL8A-RLD-6BX3-BR	IL8A-RLD-6BX3-BR-P	750	3/8-16	3	3	5/8
IL8A-RLD-6BX3-HX-SL	IL8A-RLD-6BX3-HX-SL-P	750	3/8-16	3	3	5/8
IL8A-RLD-6BX4-BR	IL8A-RLD-6BX4-BR-P	750	3/8-16	3	4	5/8
IL8A-RLD-6BX4-HX-SL	IL8A-RLD-6BX4-HX-SL-P	750	3/8-16	3	4	5/8
IL8A-RLD-7B-BR	IL8A-RLD-7B-BR-P	1500	1/2-13	3	2	5/8
IL8A-RLD-7B-HX-SL	IL8A-RLD-7B-HX-SL-P	1500	1/2-13	3	2	5/8
IL8A-RLD-7BX3-BR	IL8A-RLD-7BX3-BR-P	1500	1/2-13	3	3	5/8
IL8A-RLD-7BX3-HX-SL	IL8A-RLD-7BX3-HX-SL-P	1500	1/2-13	3	3	5/8
IL8A-RLD-7BX4-BR	IL8A-RLD-7BX4-BR-P	1500	1/2-13	3	4	5/8
IL8A-RLD-7BX4-HX-SL	IL8A-RLD-7BX4-HX-SL-P	1500	1/2-13	3	4	5/8

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty Leveler catalog.


More thread sizes
and length options
for this poly fixed
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



NOTES

31



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, POLY SWIVEL

1" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Swivel Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 4" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

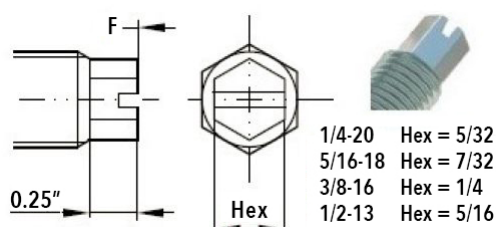

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE POLY SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL50-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL50-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1	1-3/4	1	3/16
IL50-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL50-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1	2-1/4	1-1/2	3/16
IL50-RLD-4B-BR	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL50-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1	1-3/4	1	3/16
IL50-RLD-5B-BR	400	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL50-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1	3-3/4	3	3/16
IL50-RLD-6B-BR	750	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL50-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1	3-3/4	3	3/16
IL50-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL50-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1	4-3/4	4	3/16
IL50-RLD-7B-BR	1500	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1	2-3/4	2	3/16
IL50-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL50-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1	3-3/4	3	3/16
IL50-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1	4-3/4	4	3/16
IL50-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this poly swivel
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, POLY SWIVEL

1-1/2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Swivel Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 4" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.



Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →

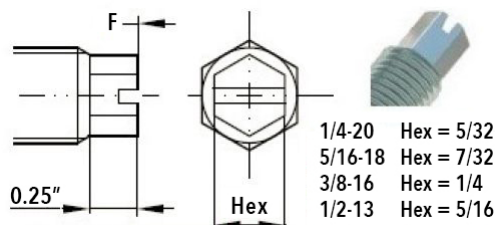**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE POLY SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL52-RLD-4BX1-BR	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-RLD-4BX15-BR	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL52-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	1-1/2	2-1/4	1-1/2	3/16
IL52-RLD-4B-BR	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-5BX1-BR	400	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	1-1/2	1-3/4	1	3/16
IL52-RLD-5B-BR	400	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-5BX3-BR	400	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-RLD-6B-BR	750	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-6BX3-BR	750	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-RLD-6BX4-BR	750	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-RLD-7B-BR	1500	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	2-3/4	2	3/16
IL52-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	3-3/4	3	3/16
IL52-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16
IL52-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	1-1/2	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this poly swivel
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, POLY SWIVEL

2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Swivel Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 4" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.




Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →

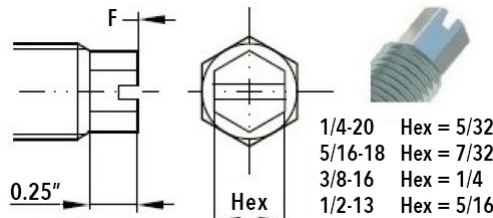**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)****TOP ALLEN-DRIVE BROACHED HEX (-BR)**

Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE POLY SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL54-RLD-4BX1-BR	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL54-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	2	1-3/4	1	3/16
IL54-RLD-4BX15-BR	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL54-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	2	2-1/4	1-1/2	3/16
IL54-RLD-4B-BR	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-5BX1-BR	400	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL54-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	2	1-3/4	1	3/16
IL54-RLD-5B-BR	400	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-5BX3-BR	400	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL54-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	2	3-3/4	3	3/16
IL54-RLD-6B-BR	750	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-6BX3-BR	750	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL54-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	2	3-3/4	3	3/16
IL54-RLD-6BX4-BR	750	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL54-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	2	4-3/4	4	3/16
IL54-RLD-7B-BR	1500	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	2	2-3/4	2	3/16
IL54-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL54-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	2	3-3/4	3	3/16
IL54-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	2	4-3/4	4	3/16
IL54-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	2	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this poly swivel
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, POLY SWIVEL

3" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Swivel Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 4" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.




Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →

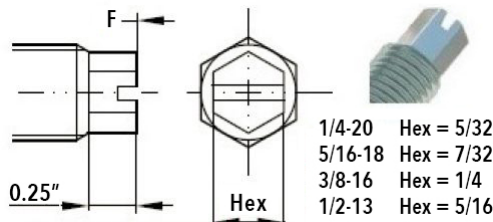**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)****TOP ALLEN-DRIVE BROACHED HEX (-BR)**

Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE POLY SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL56-RDL-4BX1-BR	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL56-RDL-4BX1-HX-SL	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL56-RDL-4BX15-BR	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL56-RDL-4BX15-HX-SL	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL56-RDL-4B-BR	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-4B-HX-SL	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-5BX1-BR	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL56-RDL-5BX1-HX-SL	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL56-RDL-5B-BR	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-5B-HX-SL	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-5BX3-BR	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL56-RDL-5BX3-HX-SL	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL56-RDL-6B-BR	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-6B-HX-SL	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-6BX3-BR	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL56-RDL-6BX3-HX-SL	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL56-RDL-6BX4-BR	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL56-RDL-6BX4-HX-SL	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL56-RDL-7B-BR	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-7B-HX-SL	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL56-RDL-7BX3-BR	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL56-RDL-7BX3-HX-SL	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL56-RDL-7BX4-BR	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL56-RDL-7BX4-HX-SL	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this poly swivel
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, POLY SWIVEL

4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Poly Swivel Glides

The IEC Poly Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Five (5) nylon base sizes to choose from: 1" to 4" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Medium-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 5 base diameters
- Glass-filled nylon
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables


Optional jam nut
(add -JN to part number) →



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

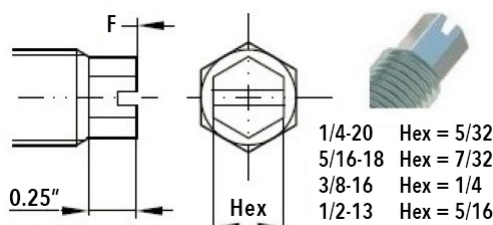

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

LOW PROFILE POLY SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL58-RLD-4BX1-BR	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL58-RLD-4BX1-HX-SL	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL58-RLD-4BX15-BR	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL58-RLD-4BX15-HX-SL	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL58-RLD-4B-BR	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-4B-HX-SL	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-5BX1-BR	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL58-RLD-5BX1-HX-SL	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL58-RLD-5B-BR	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-5B-HX-SL	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-5BX3-BR	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL58-RLD-5BX3-HX-SL	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL58-RLD-6B-BR	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-6B-HX-SL	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-6BX3-BR	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL58-RLD-6BX3-HX-SL	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL58-RLD-6BX4-BR	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL58-RLD-6BX4-HX-SL	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL58-RLD-7B-BR	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-7B-HX-SL	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL58-RLD-7BX3-BR	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL58-RLD-7BX3-HX-SL	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL58-RLD-7BX4-BR	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL58-RLD-7BX4-HX-SL	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.


More thread sizes
and length options
for this poly swivel
base design in IEC's
Medium-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size							
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16



NOTES

[illegible]


INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

1" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut (add -JN to part number) →


TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)


1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)


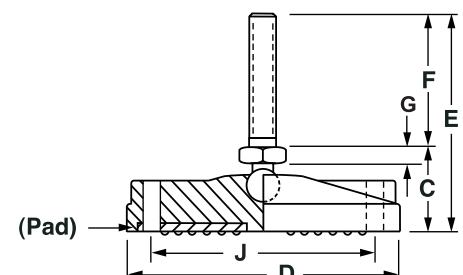
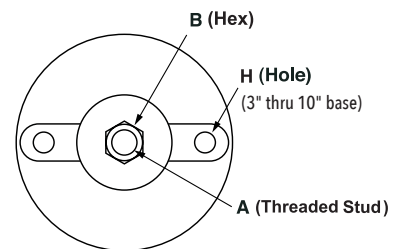
Top allen-drive broached hex (-BR) Dimension table at bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL90-RLD-4BX1-BR-P	100	1/4-20	1/2	1	1	2	1	3/16
IL90-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1	1	2	1	3/16
IL90-RLD-4BX15-BR-P	100	1/4-20	1/2	1	1	2-1/2	1-1/2	3/16
IL90-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1	1	2-1/2	1-1/2	3/16
IL90-RLD-4B-BR-P	100	1/4-20	1/2	1	1	3	2	3/16
IL90-RLD-4B-HX-SL-P	100	1/4-20	1/2	1	1	3	2	3/16
IL90-RLD-5BX1-BR-P	400	5/16-18	1/2	1	1	2	1	3/16
IL90-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1	1	2	1	3/16
IL90-RLD-5B-BR-P	400	5/16-18	1/2	1	1	3	2	3/16
IL90-RLD-5B-HX-SL-P	400	5/16-18	1/2	1	1	3	2	3/16
IL90-RLD-5BX3-BR-P	400	5/16-18	1/2	1	1	4	3	3/16
IL90-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1	1	4	3	3/16
IL90-RLD-6B-BR-P	750	3/8-16	1/2	1	1	3	2	3/16
IL90-RLD-6B-HX-SL-P	750	3/8-16	1/2	1	1	3	2	3/16
IL90-RLD-6BX3-BR-P	750	3/8-16	1/2	1	1	4	3	3/16
IL90-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1	1	4	3	3/16
IL90-RLD-6BX4-BR-P	750	3/8-16	1/2	1	1	5	4	3/16
IL90-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1	1	5	4	3/16
IL90-RLD-7B-BR-P	1500	1/2-13	1/2	1	1	3	2	3/16
IL90-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1	1	3	2	3/16
IL90-RLD-7BX3-BR-P	1500	1/2-13	1/2	1	1	4	3	3/16
IL90-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1	1	4	3	3/16
IL90-RLD-7BX4-BR-P	1500	1/2-13	1/2	1	1	5	4	3/16
IL90-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1	1	5	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this nylon swivel base design in IEC's Medium-Duty Leveler catalog.



To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

1-1/2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures

Optional jam nut
(add -JN to part number) →

**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL92-RLD-4BX1-BR-P	100	1/4-20	1/2	1	1-1/2	2	1	3/16
IL92-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1	1-1/2	2	1	3/16
IL92-RLD-4BX15-BR-P	100	1/4-20	1/2	1	1-1/2	2-1/2	1-1/2	3/16
IL92-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1	1-1/2	2-1/2	1-1/2	3/16
IL92-RLD-4B-BR-P	100	1/4-20	1/2	1	1-1/2	3	2	3/16
IL92-RLD-4B-HX-SL-P	100	1/4-20	1/2	1	1-1/2	3	2	3/16
IL92-RLD-5BX1-BR-P	400	5/16-18	1/2	1	1-1/2	2	1	3/16
IL92-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1	1-1/2	2	1	3/16
IL92-RLD-5B-BR-P	400	5/16-18	1/2	1	1-1/2	3	2	3/16
IL92-RLD-5B-HX-SL-P	400	5/16-18	1/2	1	1-1/2	3	2	3/16
IL92-RLD-5BX3-BR-P	400	5/16-18	1/2	1	1-1/2	4	3	3/16
IL92-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1	1-1/2	4	3	3/16
IL92-RLD-6B-BR-P	750	3/8-16	1/2	1	1-1/2	3	2	3/16
IL92-RLD-6B-HX-SL-P	750	3/8-16	1/2	1	1-1/2	3	2	3/16
IL92-RLD-6BX3-BR-P	750	3/8-16	1/2	1	1-1/2	4	3	3/16
IL92-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1	1-1/2	4	3	3/16
IL92-RLD-6BX4-BR-P	750	3/8-16	1/2	1	1-1/2	5	4	3/16
IL92-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1	1-1/2	5	4	3/16
IL92-RLD-7B-BR-P	1500	1/2-13	1/2	1	1-1/2	3	2	3/16
IL92-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1	1-1/2	3	2	3/16
IL92-RLD-7BX3-BR-P	1500	1/2-13	1/2	1	1-1/2	4	3	3/16
IL92-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1	1-1/2	4	3	3/16
IL92-RLD-7BX4-BR-P	1500	1/2-13	1/2	1	1-1/2	5	4	3/16
IL92-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1	1-1/2	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

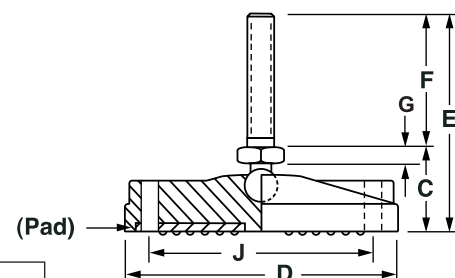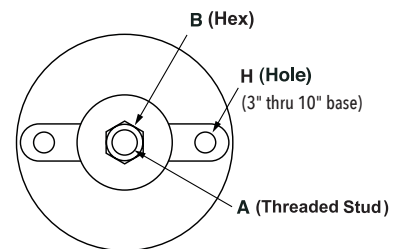

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

2-3/8" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)





Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL94-RLD-4BX1-BR-P	100	1/4-20	1/2	1	2-3/8	2	1	3/16
IL94-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1	2-3/8	2	1	3/16
IL94-RLD-4BX15-BR-P	100	1/4-20	1/2	1	2-3/8	2-1/2	1-1/2	3/16
IL94-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1	2-3/8	2-1/2	1-1/2	3/16
IL94-RLD-4B-BR-P	100	1/4-20	1/2	1	2-3/8	3	2	3/16
IL94-RLD-4B-HX-SL-P	100	1/4-20	1/2	1	2-3/8	3	2	3/16
IL94-RLD-5BX1-BR-P	400	5/16-18	1/2	1	2-3/8	2	1	3/16
IL94-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1	2-3/8	2	1	3/16
IL94-RLD-5B-BR-P	400	5/16-18	1/2	1	2-3/8	3	2	3/16
IL94-RLD-5B-HX-SL-P	400	5/16-18	1/2	1	2-3/8	3	2	3/16
IL94-RLD-5BX3-BR-P	400	5/16-18	1/2	1	2-3/8	4	3	3/16
IL94-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1	2-3/8	4	3	3/16
IL94-RLD-6B-BR-P	750	3/8-16	1/2	1	2-3/8	3	2	3/16
IL94-RLD-6B-HX-SL-P	750	3/8-16	1/2	1	2-3/8	3	2	3/16
IL94-RLD-6BX3-BR-P	750	3/8-16	1/2	1	2-3/8	4	3	3/16
IL94-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1	2-3/8	4	3	3/16
IL94-RLD-6BX4-BR-P	750	3/8-16	1/2	1	2-3/8	5	4	3/16
IL94-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1	2-3/8	5	4	3/16
IL94-RLD-7B-BR-P	1500	1/2-13	1/2	1	2-3/8	3	2	3/16
IL94-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1	2-3/8	3	2	3/16
IL94-RLD-7BX3-BR-P	1500	1/2-13	1/2	1	2-3/8	4	3	3/16
IL94-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1	2-3/8	4	3	3/16
IL94-RLD-7BX4-BR-P	1500	1/2-13	1/2	1	2-3/8	5	4	3/16
IL94-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1	2-3/8	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

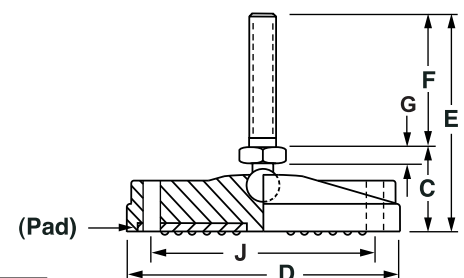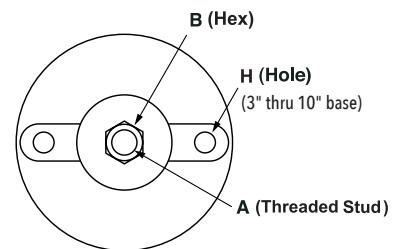

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

3-1/8" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →

**TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL96-RLD-4BX1-BR-P	100	1/4-20	1/2	1	3-1/8	2	1	3/16
IL96-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1	3-1/8	2	1	3/16
IL96-RLD-4BX15-BR-P	100	1/4-20	1/2	1	3-1/8	2-1/2	1-1/2	3/16
IL96-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1	3-1/8	2-1/2	1-1/2	3/16
IL96-RLD-4B-BR-P	100	1/4-20	1/2	1	3-1/8	3	2	3/16
IL96-RLD-4B-HX-SL-P	100	1/4-20	1/2	1	3-1/8	3	2	3/16
IL96-RLD-5BX1-BR-P	400	5/16-18	1/2	1	3-1/8	2	1	3/16
IL96-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1	3-1/8	2	1	3/16
IL96-RLD-5B-BR-P	400	5/16-18	1/2	1	3-1/8	3	2	3/16
IL96-RLD-5B-HX-SL-P	400	5/16-18	1/2	1	3-1/8	3	2	3/16
IL96-RLD-5BX3-BR-P	400	5/16-18	1/2	1	3-1/8	4	3	3/16
IL96-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1	3-1/8	4	3	3/16
IL96-RLD-6B-BR-P	750	3/8-16	1/2	1	3-1/8	3	2	3/16
IL96-RLD-6B-HX-SL-P	750	3/8-16	1/2	1	3-1/8	3	2	3/16
IL96-RLD-6BX3-BR-P	750	3/8-16	1/2	1	3-1/8	4	3	3/16
IL96-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1	3-1/8	4	3	3/16
IL96-RLD-6BX4-BR-P	750	3/8-16	1/2	1	3-1/8	5	4	3/16
IL96-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1	3-1/8	5	4	3/16
IL96-RLD-7B-BR-P	1500	1/2-13	1/2	1	3-1/8	3	2	3/16
IL96-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1	3-1/8	3	2	3/16
IL96-RLD-7BX3-BR-P	1500	1/2-13	1/2	1	3-1/8	4	3	3/16
IL96-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1	3-1/8	4	3	3/16
IL96-RLD-7BX4-BR-P	1500	1/2-13	1/2	1	3-1/8	5	4	3/16
IL96-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1	3-1/8	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

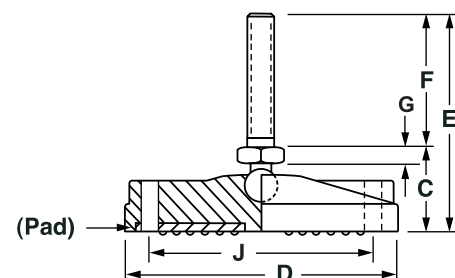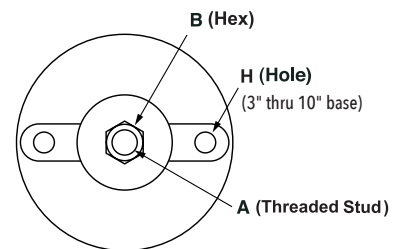

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)





Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL98-RLD-4BX1-BR-P	100	1/4-20	1/2	1-1/4	4	2	1	3/16
IL98-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1-1/4	4	2	1	3/16
IL98-RLD-4BX15-BR-P	100	1/4-20	1/2	1-1/4	4	2-1/2	1-1/2	3/16
IL98-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1-1/4	4	2-1/2	1-1/2	3/16
IL98-RLD-4B-BR-P	100	1/4-20	1/2	1-1/4	4	3	2	3/16
IL98-RLD-4B-HX-SL-P	100	1/4-20	1/2	1-1/4	4	3	2	3/16
IL98-RLD-5BX1-BR-P	400	5/16-18	1/2	1-1/4	4	2	1	3/16
IL98-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1-1/4	4	2	1	3/16
IL98-RLD-5B-BR-P	400	5/16-18	1/2	1-1/4	4	3	2	3/16
IL98-RLD-5B-HX-SL-P	400	5/16-18	1/2	1-1/4	4	3	2	3/16
IL98-RLD-5BX3-BR-P	400	5/16-18	1/2	1-1/4	4	4	3	3/16
IL98-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1-1/4	4	4	3	3/16
IL98-RLD-6B-BR-P	750	3/8-16	1/2	1-1/4	4	3	2	3/16
IL98-RLD-6B-HX-SL-P	750	3/8-16	1/2	1-1/4	4	3	2	3/16
IL98-RLD-6BX3-BR-P	750	3/8-16	1/2	1-1/4	4	4	3	3/16
IL98-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1-1/4	4	4	3	3/16
IL98-RLD-6BX5-BR-P	750	3/8-16	1/2	1-1/4	4	6	5	3/16
IL98-RLD-6BX5-HX-SL-P	750	3/8-16	1/2	1-1/4	4	6	5	3/16
IL98-RLD-7B-BR-P	1500	1/2-13	1/2	1-1/4	4	3	2	3/16
IL98-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1-1/4	4	3	2	3/16
IL98-RLD-7BX3-BR-P	1500	1/2-13	1/2	1-1/4	4	4	3	3/16
IL98-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1-1/4	4	4	3	3/16
IL98-RLD-7BX4-BR-P	1500	1/2-13	1/2	1-1/4	4	5	4	3/16
IL98-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1-1/4	4	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

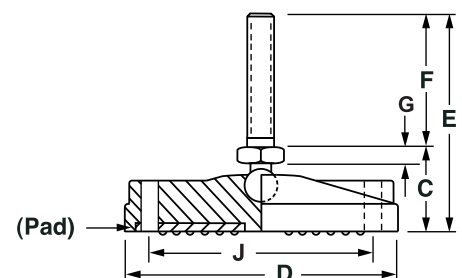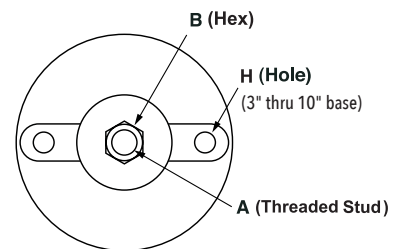

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

6" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)





Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL98A-RLD-4BX1-BR-P	100	1/4-20	1/2	1-1/4	6	2	1	3/16
IL98A-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1-1/4	6	2	1	3/16
IL98A-RLD-4BX15-BR-P	100	1/4-20	1/2	1-1/4	6	2-1/2	1-1/2	3/16
IL98A-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1-1/4	6	2-1/2	1-1/2	3/16
IL98A-RLD-4B-BR-P	100	1/4-20	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-4B-HX-SL-P	100	1/4-20	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-5BX1-BR-P	400	5/16-18	1/2	1-1/4	6	2	1	3/16
IL98A-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1-1/4	6	2	1	3/16
IL98A-RLD-5B-BR-P	400	5/16-18	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-5B-HX-SL-P	400	5/16-18	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-5BX3-BR-P	400	5/16-18	1/2	1-1/4	6	4	3	3/16
IL98A-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1-1/4	6	4	3	3/16
IL98A-RLD-6B-BR-P	750	3/8-16	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-6B-HX-SL-P	750	3/8-16	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-6BX3-BR-P	750	3/8-16	1/2	1-1/4	6	4	3	3/16
IL98A-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1-1/4	6	4	3	3/16
IL98A-RLD-6BX4-BR-P	750	3/8-16	1/2	1-1/4	6	5	4	3/16
IL98A-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1-1/4	6	5	4	3/16
IL98A-RLD-7B-BR-P	1500	1/2-13	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1-1/4	6	3	2	3/16
IL98A-RLD-7BX3-BR-P	1500	1/2-13	1/2	1-1/4	6	4	3	3/16
IL98A-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1-1/4	6	4	3	3/16
IL98A-RLD-7BX4-BR-P	1500	1/2-13	1/2	1-1/4	6	5	4	3/16
IL98A-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1-1/4	6	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

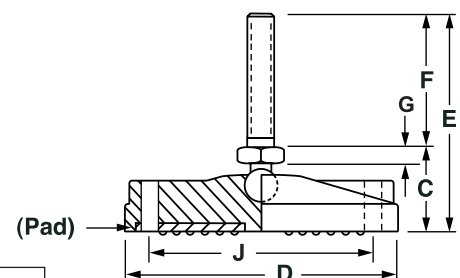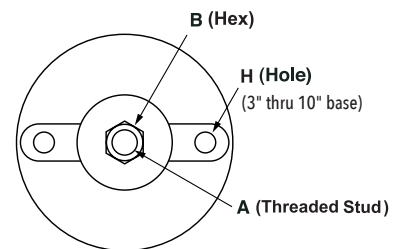

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

8" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)





Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL98B-RLD-4BX1-BR-P	100	1/4-20	1/2	1-1/4	8	2	1	3/16
IL98B-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1-1/4	8	2	1	3/16
IL98B-RLD-4BX15-BR-P	100	1/4-20	1/2	1-1/4	8	2-1/2	1-1/2	3/16
IL98B-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1-1/4	8	2-1/2	1-1/2	3/16
IL98B-RLD-4B-BR-P	100	1/4-20	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-4B-HX-SL-P	100	1/4-20	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-5BX1-BR-P	400	5/16-18	1/2	1-1/4	8	2	1	3/16
IL98B-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1-1/4	8	2	1	3/16
IL98B-RLD-5B-BR-P	400	5/16-18	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-5B-HX-SL-P	400	5/16-18	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-5BX3-BR-P	400	5/16-18	1/2	1-1/4	8	4	3	3/16
IL98B-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1-1/4	8	4	3	3/16
IL98B-RLD-6B-BR-P	750	3/8-16	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-6B-HX-SL-P	750	3/8-16	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-6BX3-BR-P	750	3/8-16	1/2	1-1/4	8	4	3	3/16
IL98B-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1-1/4	8	4	3	3/16
IL98B-RLD-6BX4-BR-P	750	3/8-16	1/2	1-1/4	8	5	4	3/16
IL98B-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1-1/4	8	5	4	3/16
IL98B-RLD-7B-BR-P	1500	1/2-13	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1-1/4	8	3	2	3/16
IL98B-RLD-7BX3-BR-P	1500	1/2-13	1/2	1-1/4	8	4	3	3/16
IL98B-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1-1/4	8	4	3	3/16
IL98B-RLD-7BX4-BR-P	1500	1/2-13	1/2	1-1/4	8	5	4	3/16
IL98B-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1-1/4	8	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

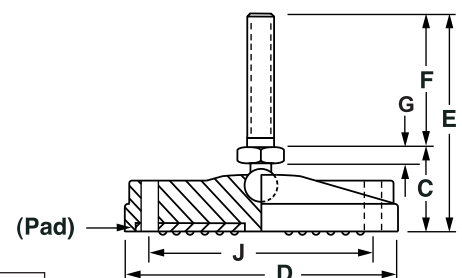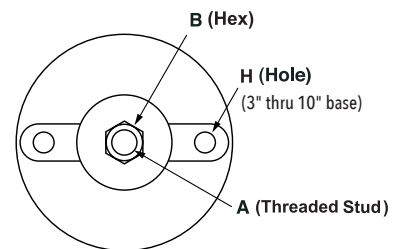

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

NYLON SWIVEL STUD

10" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Nylon Swivel Glides

The IEC Nylon Swivel Ruggedized™ Light Duty (RLD) Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design and composite materials to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Eight (8) nylon base sizes with rubber pad to choose from: 1" to 10" with 15 degree swivel from centerline. Steel stud with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric) available for this base style in our Medium-Duty Leveler catalog.

Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Lag holes
- Corrosion resistant
- 15 degree swivel
- 8 base diameters
- Glass-filled nylon
- Rubber Pad
- Optional jam nut (-JN)
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)



1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)





Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

NYLON SWIVEL — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL98C-RLD-4BX1-BR-P	100	1/4-20	1/2	1-1/4	10	2	1	3/16
IL98C-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	1-1/4	10	2	1	3/16
IL98C-RLD-4BX15-BR-P	100	1/4-20	1/2	1-1/4	10	2-1/2	1-1/2	3/16
IL98C-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	1-1/4	10	2-1/2	1-1/2	3/16
IL98C-RLD-4B-BR-P	100	1/4-20	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-4B-HX-SL-P	100	1/4-20	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-5BX1-BR-P	400	5/16-18	1/2	1-1/4	10	2	1	3/16
IL98C-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	1-1/4	10	2	1	3/16
IL98C-RLD-5B-BR-P	400	5/16-18	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-5B-HX-SL-P	400	5/16-18	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-5BX3-BR-P	400	5/16-18	1/2	1-1/4	10	4	3	3/16
IL98C-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	1-1/4	10	4	3	3/16
IL98C-RLD-6B-BR-P	750	3/8-16	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-6B-HX-SL-P	750	3/8-16	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-6BX3-BR-P	750	3/8-16	1/2	1-1/4	10	4	3	3/16
IL98C-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	1-1/4	10	4	3	3/16
IL98C-RLD-6BX4-BR-P	750	3/8-16	1/2	1-1/4	10	5	4	3/16
IL98C-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	1-1/4	10	5	4	3/16
IL98C-RLD-7B-BR-P	1500	1/2-13	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-7B-HX-SL-P	1500	1/2-13	1/2	1-1/4	10	3	2	3/16
IL98C-RLD-7BX3-BR-P	1500	1/2-13	1/2	1-1/4	10	4	3	3/16
IL98C-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	1-1/4	10	4	3	3/16
IL98C-RLD-7BX4-BR-P	1500	1/2-13	1/2	1-1/4	10	5	4	3/16
IL98C-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	1-1/4	10	5	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Medium-
Duty or Heavy-Duty
Leveler catalogs.

More thread sizes
and length options
for this nylon swivel
base design in IEC's
Medium-Duty
Leveler catalog.

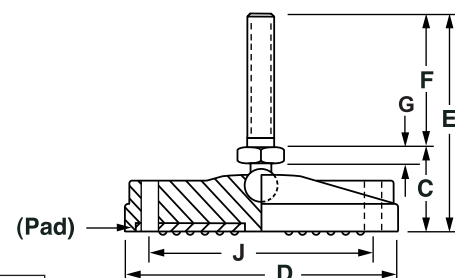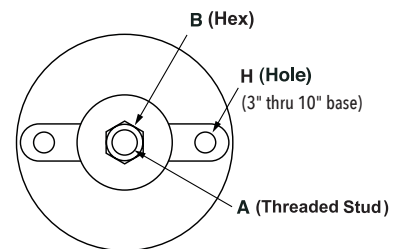

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, STEEL SWIVEL

3/4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Steel Swivel Stud Glides

The IEC Steel Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Six (6) steel base sizes to choose from: 3/4" to 4". Steel stud and base with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Heavy-Duty Leveler catalog.


Features

- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 6 base diameters
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant


Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut
(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

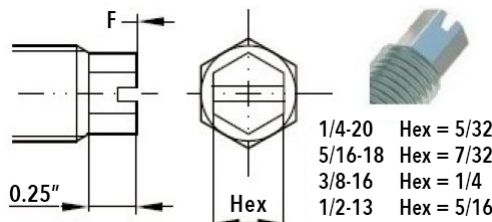

1/4-20 Hex = 5/32
5/16-18 Hex = 7/32
3/8-16 Hex = 1/4
1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive
broached hex (-BR)
Dimension table at
bottom of page.

STEEL SWIVEL — 1" to 4" STUD LENGTHS

Steel	Steel with Rubber Pad	Load	A	B	C	D	E	F	G
IL60-RLD-4BX1-BR	IL60-RLD-4BX1-BR-P	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL60-RLD-4BX1-HX-SL	IL60-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	3/4	3/4	1-3/4	1	3/16
IL60-RLD-4BX15-BR	IL60-RLD-4BX15-BR-P	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL60-RLD-4BX15-HX-S	IL60-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	3/4	3/4	2-1/4	1-1/2	3/16
IL60-RLD-4B-BR	IL60-RLD-4B-BR-P	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-4B-HX-SL	IL60-RLD-4B-HX-SL-P	100	1/4-20	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-5BX1-BR	IL60-RLD-5BX1-BR-P	400	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL60-RLD-5BX1-HX-SL	IL60-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	3/4	3/4	1-3/4	1	3/16
IL60-RLD-5B-BR	IL60-RLD-5B-BR-P	400	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-5B-HX-SL	IL60-RLD-5B-HX-SL-P	400	5/16-18	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-5BX3-BR	IL60-RLD-5BX3-BR-P	400	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL60-RLD-5BX3-HX-SL	IL60-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	3/4	3/4	3-3/4	3	3/16
IL60-RLD-6B-BR	IL60-RLD-6B-BR-P	750	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-6B-HX-SL	IL60-RLD-6B-HX-SL-P	750	3/8-16	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-6BX3-BR	IL60-RLD-6BX3-BR-P	750	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL60-RLD-6BX3-HX-SL	IL60-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	3/4	3/4	3-3/4	3	3/16
IL60-RLD-6BX4-BR	IL60-RLD-6BX4-BR-P	750	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL60-RLD-6BX4-HX-SL	IL60-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	3/4	3/4	4-3/4	4	3/16
IL60-RLD-7B-BR	IL60-RLD-7B-BR-P	1500	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-7B-HX-SL	IL60-RLD-7B-HX-SL-P	1500	1/2-13	1/2	3/4	3/4	2-3/4	2	3/16
IL60-RLD-7BX3-BR	IL60-RLD-7BX3-BR-P	1500	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL60-RLD-7BX3-HX-SL	IL60-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	3/4	3/4	3-3/4	3	3/16
IL60-RLD-7BX4-BR	IL60-RLD-7BX4-BR-P	1500	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16
IL60-RLD-7BX4-HX-SL	IL60-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	3/4	3/4	4-3/4	4	3/16

Standard finish is
black zinc. For
silver or gold finish
(as shown above)
see IEC's Heavy-Duty
Leveler catalog.

More thread sizes
and length options
for this steel swivel
base design in IEC's
Heavy-Duty
Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, STEEL SWIVEL

1-1/4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Steel Swivel Stud Glides

The IEC Steel Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Six (6) steel base sizes to choose from: 3/4" to 4". Steel stud and base with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Heavy-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 6 base diameters
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut


(add -JN to part number) →



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

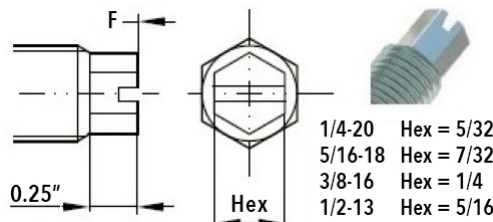

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

STEEL SWIVEL — 1" to 4" STUD LENGTHS

Steel	Steel with Rubber Pad	Load	A	B	C	D	E	F	G
IL62-RLD-4BX1-BR	IL62-RLD-4BX1-BR-P	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-RLD-4BX1-HX-SL	IL62-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-RLD-4BX15-BR	IL62-RLD-4BX15-BR-P	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL62-RLD-4BX15-HX-S	IL62-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	3/4	1-1/4	2-1/4	1-1/2	3/16
IL62-RLD-4B-BR	IL62-RLD-4B-BR-P	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-4B-HX-SL	IL62-RLD-4B-HX-SL-P	100	1/4-20	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-5BX1-BR	IL62-RLD-5BX1-BR-P	400	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-RLD-5BX1-HX-SL	IL62-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	3/4	1-1/4	1-3/4	1	3/16
IL62-RLD-5B-BR	IL62-RLD-5B-BR-P	400	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-5B-HX-SL	IL62-RLD-5B-HX-SL-P	400	5/16-18	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-5BX3-BR	IL62-RLD-5BX3-BR-P	400	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-RLD-5BX3-HX-SL	IL62-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-RLD-6B-BR	IL62-RLD-6B-BR-P	750	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-6B-HX-SL	IL62-RLD-6B-HX-SL-P	750	3/8-16	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-6BX3-BR	IL62-RLD-6BX3-BR-P	750	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-RLD-6BX3-HX-SL	IL62-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-RLD-6BX4-BR	IL62-RLD-6BX4-BR-P	750	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-RLD-6BX4-HX-SL	IL62-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-RLD-7B-BR	IL62-RLD-7B-BR-P	1500	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-7B-HX-SL	IL62-RLD-7B-HX-SL-P	1500	1/2-13	1/2	3/4	1-1/4	2-3/4	2	3/16
IL62-RLD-7BX3-BR	IL62-RLD-7BX3-BR-P	1500	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-RLD-7BX3-HX-SL	IL62-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	3/4	1-1/4	3-3/4	3	3/16
IL62-RLD-7BX4-BR	IL62-RLD-7BX4-BR-P	1500	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16
IL62-RLD-7BX4-HX-SL	IL62-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	3/4	1-1/4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Heavy-Duty Leveler catalog.

More thread sizes and length options for this steel swivel base design in IEC's Heavy-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, STEEL SWIVEL

1-7/8" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Steel Swivel Stud Glides

The IEC Steel Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Six (6) steel base sizes to choose from: 3/4" to 4". Steel stud and base with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Heavy-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 6 base diameters
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut

(add -JN to part number) →

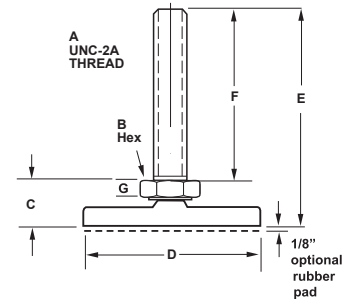


TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

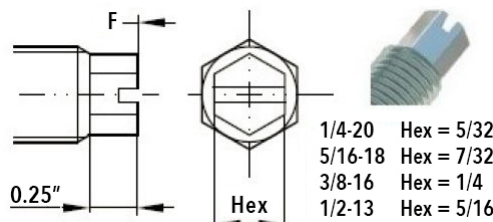

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

STEEL SWIVEL — 1" to 4" STUD LENGTHS

Steel	Steel with Rubber Pad	Load	A	B	C	D	E	F	G
IL64-RLD-4BX1-BR	IL64-RLD-4BX1-BR-P	100	1/4-20	1/2	3/4	1-7/8	1-3/4	1	3/16
IL64-RLD-4BX1-HX-SL	IL64-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	3/4	1-7/8	1-3/4	1	3/16
IL64-RLD-4BX15-BR	IL64-RLD-4BX15-BR-P	100	1/4-20	1/2	3/4	1-7/8	2-1/4	1-1/2	3/16
IL64-RLD-4BX15-HX-S	IL64-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	3/4	1-7/8	2-1/4	1-1/2	3/16
IL64-RLD-4B-BR	IL64-RLD-4B-BR-P	100	1/4-20	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-4B-HX-SL	IL64-RLD-4B-HX-SL-P	100	1/4-20	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-5BX1-BR	IL64-RLD-5BX1-BR-P	400	5/16-18	1/2	3/4	1-7/8	1-3/4	1	3/16
IL64-RLD-5BX1-HX-SL	IL64-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	3/4	1-7/8	1-3/4	1	3/16
IL64-RLD-5B-BR	IL64-RLD-5B-BR-P	400	5/16-18	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-5B-HX-SL	IL64-RLD-5B-HX-SL-P	400	5/16-18	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-5BX3-BR	IL64-RLD-5BX3-BR-P	400	5/16-18	1/2	3/4	1-7/8	3-3/4	3	3/16
IL64-RLD-5BX3-HX-SL	IL64-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	3/4	1-7/8	3-3/4	3	3/16
IL64-RLD-6B-BR	IL64-RLD-6B-BR-P	750	3/8-16	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-6B-HX-SL	IL64-RLD-6B-HX-SL-P	750	3/8-16	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-6BX3-BR	IL64-RLD-6BX3-BR-P	750	3/8-16	1/2	3/4	1-7/8	3-3/4	3	3/16
IL64-RLD-6BX3-HX-SL	IL64-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	3/4	1-7/8	3-3/4	3	3/16
IL64-RLD-6BX4-BR	IL64-RLD-6BX4-BR-P	750	3/8-16	1/2	3/4	1-7/8	4-3/4	4	3/16
IL64-RLD-6BX4-HX-SL	IL64-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	3/4	1-7/8	4-3/4	4	3/16
IL64-RLD-7B-BR	IL64-RLD-7B-BR-P	1500	1/2-13	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-7B-HX-SL	IL64-RLD-7B-HX-SL-P	1500	1/2-13	1/2	3/4	1-7/8	2-3/4	2	3/16
IL64-RLD-7BX3-BR	IL64-RLD-7BX3-BR-P	1500	1/2-13	1/2	3/4	1-7/8	3-3/4	3	3/16
IL64-RLD-7BX3-HX-SL	IL64-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	3/4	1-7/8	3-3/4	3	3/16
IL64-RLD-7BX4-BR	IL64-RLD-7BX4-BR-P	1500	1/2-13	1/2	3/4	1-7/8	4-3/4	4	3/16
IL64-RLD-7BX4-HX-SL	IL64-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	3/4	1-7/8	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Heavy-Duty Leveler catalog.

More thread sizes and length options for this steel swivel base design in IEC's Heavy-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size							
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, STEEL SWIVEL

2-1/2" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Steel Swivel Stud Glides

The IEC Steel Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Six (6) steel base sizes to choose from: 3/4" to 4". Steel stud and base with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Heavy-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 6 base diameters
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut

(add -JN to part number) →




TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

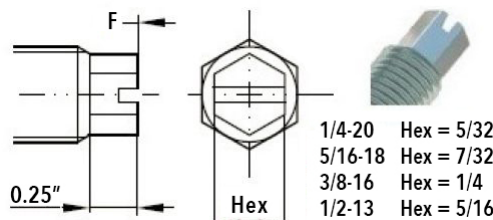

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

STEEL SWIVEL — 1" to 4" STUD LENGTHS

Steel	Steel with Rubber Pad	Load	A	B	C	D	E	F	G
IL66-RLD-4BX1-BR	IL66-RLD-4BX1-BR-P	100	1/4-20	1/2	3/4	2-1/2	1-3/4	1	3/16
IL66-RLD-4BX1-HX-SL	IL66-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	3/4	2-1/2	1-3/4	1	3/16
IL66-RLD-4BX15-BR	IL66-RLD-4BX15-BR-P	100	1/4-20	1/2	3/4	2-1/2	2-1/4	1-1/2	3/16
IL66-RLD-4BX15-HX-S	IL66-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	3/4	2-1/2	2-1/4	1-1/2	3/16
IL66-RLD-4B-BR	IL66-RLD-4B-BR-P	100	1/4-20	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-4B-HX-SL	IL66-RLD-4B-HX-SL-P	100	1/4-20	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-5BX1-BR	IL66-RLD-5BX1-BR-P	400	5/16-18	1/2	3/4	2-1/2	1-3/4	1	3/16
IL66-RLD-5BX1-HX-SL	IL66-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	3/4	2-1/2	1-3/4	1	3/16
IL66-RLD-5B-BR	IL66-RLD-5B-BR-P	400	5/16-18	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-5B-HX-SL	IL66-RLD-5B-HX-SL-P	400	5/16-18	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-5BX3-BR	IL66-RLD-5BX3-BR-P	400	5/16-18	1/2	3/4	2-1/2	3-3/4	3	3/16
IL66-RLD-5BX3-HX-SL	IL66-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	3/4	2-1/2	3-3/4	3	3/16
IL66-RLD-6B-BR	IL66-RLD-6B-BR-P	750	3/8-16	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-6B-HX-SL	IL66-RLD-6B-HX-SL-P	750	3/8-16	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-6BX3-BR	IL66-RLD-6BX3-BR-P	750	3/8-16	1/2	3/4	2-1/2	3-3/4	3	3/16
IL66-RLD-6BX3-HX-SL	IL66-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	3/4	2-1/2	3-3/4	3	3/16
IL66-RLD-6BX4-BR	IL66-RLD-6BX4-BR-P	750	3/8-16	1/2	3/4	2-1/2	4-3/4	4	3/16
IL66-RLD-6BX4-HX-SL	IL66-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	3/4	2-1/2	4-3/4	4	3/16
IL66-RLD-7B-BR	IL66-RLD-7B-BR-P	1500	1/2-13	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-7B-HX-SL	IL66-RLD-7B-HX-SL-P	1500	1/2-13	1/2	3/4	2-1/2	2-3/4	2	3/16
IL66-RLD-7BX3-BR	IL66-RLD-7BX3-BR-P	1500	1/2-13	1/2	3/4	2-1/2	3-3/4	3	3/16
IL66-RLD-7BX3-HX-SL	IL66-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	3/4	2-1/2	3-3/4	3	3/16
IL66-RLD-7BX4-BR	IL66-RLD-7BX4-BR-P	1500	1/2-13	1/2	3/4	2-1/2	4-3/4	4	3/16
IL66-RLD-7BX4-HX-SL	IL66-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	3/4	2-1/2	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Heavy-Duty Leveler catalog.

More thread sizes and length options for this steel swivel base design in IEC's Heavy-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, STEEL SWIVEL

3" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Steel Swivel Stud Glides

The IEC Steel Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Six (6) steel base sizes to choose from: 3/4" to 4". Steel stud and base with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Heavy-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 6 base diameters
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut

(add -JN to part number) →

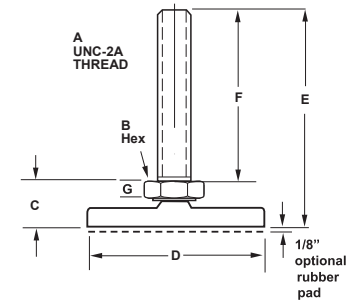

TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

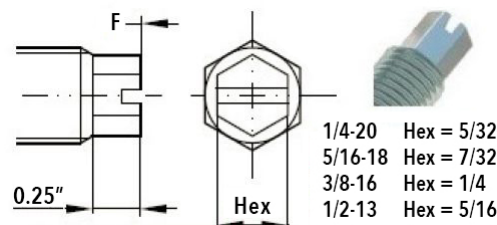

1/4-20	Hex = 5/32
5/16-18	Hex = 7/32
3/8-16	Hex = 1/4
1/2-13	Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

STEEL SWIVEL — 1" to 4" STUD LENGTHS

Steel	Steel with Rubber Pad	Load	A	B	C	D	E	F	G
IL68-RLD-4BX1-BR	IL68-RLD-4BX1-BR-P	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL68-RLD-4BX1-HX-SL	IL68-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	3/4	3	1-3/4	1	3/16
IL68-RLD-4BX15-BR	IL68-RLD-4BX15-BR-P	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL68-RLD-4BX15-HX-S	IL68-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	3/4	3	2-1/4	1-1/2	3/16
IL68-RLD-4B-BR	IL68-RLD-4B-BR-P	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-4B-HX-SL	IL68-RLD-4B-HX-SL-P	100	1/4-20	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-5BX1-BR	IL68-RLD-5BX1-BR-P	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL68-RLD-5BX1-HX-SL	IL68-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	3/4	3	1-3/4	1	3/16
IL68-RLD-5B-BR	IL68-RLD-5B-BR-P	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-5B-HX-SL	IL68-RLD-5B-HX-SL-P	400	5/16-18	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-5BX3-BR	IL68-RLD-5BX3-BR-P	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL68-RLD-5BX3-HX-SL	IL68-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	3/4	3	3-3/4	3	3/16
IL68-RLD-6B-BR	IL68-RLD-6B-BR-P	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-6B-HX-SL	IL68-RLD-6B-HX-SL-P	750	3/8-16	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-6BX3-BR	IL68-RLD-6BX3-BR-P	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL68-RLD-6BX3-HX-SL	IL68-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	3/4	3	3-3/4	3	3/16
IL68-RLD-6BX4-BR	IL68-RLD-6BX4-BR-P	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL68-RLD-6BX4-HX-SL	IL68-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	3/4	3	4-3/4	4	3/16
IL68-RLD-7B-BR	IL68-RLD-7B-BR-P	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-7B-HX-SL	IL68-RLD-7B-HX-SL-P	1500	1/2-13	1/2	3/4	3	2-3/4	2	3/16
IL68-RLD-7BX3-BR	IL68-RLD-7BX3-BR-P	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL68-RLD-7BX3-HX-SL	IL68-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	3/4	3	3-3/4	3	3/16
IL68-RLD-7BX4-BR	IL68-RLD-7BX4-BR-P	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16
IL68-RLD-7BX4-HX-SL	IL68-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	3/4	3	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Heavy-Duty Leveler catalog.

More thread sizes and length options for this steel swivel base design in IEC's Heavy-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

LOW-PROFILE, STEEL SWIVEL

4" BASE DIAMETER

Ruggedized™ Light Duty (RLD) Low-Profile, Steel Swivel Stud Glides

The IEC Steel Base Ruggedized™ Light Duty (RLD) Swivel Glides are ideal for light to medium duty, high volume applications. The RLD series glides use advanced engineering design to create a rugged glide while lowering the manufacturing costs of this product family. These RLD glides incorporate many features requested by commercial and retail customers. They come standard with your choice of Top-A-Just™ features: Internal top allen-drive broached hex (-BR) or external top slotted hex (-HX-SL) for a socket or open end wrench. Six (6) steel base sizes to choose from: 3/4" to 4". Steel stud and base with black trivalent zinc plating. Optional jam nut (add -JN to part number).

More thread sizes and lengths (including metric, stainless steel and female sockets) available for this base style in our Heavy-Duty Leveler catalog.

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- Corrosion resistant
- 15 degree swivel
- 6 base diameters
- Optional jam nut (-JN)
- Optional Rubber Pad
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables

Optional jam nut

(add -JN to part number) →



TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

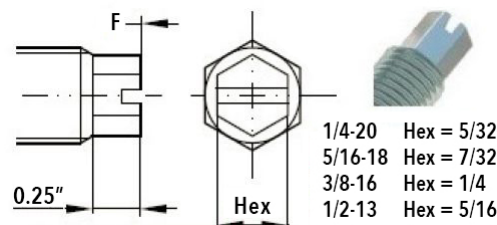

TOP ALLEN-DRIVE BROACHED HEX (-BR)



Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

STEEL SWIVEL — 1" to 4" STUD LENGTHS

Steel	Steel with Rubber Pad	Load	A	B	C	D	E	F	G
IL70-RLD-4BX1-BR	IL70-RLD-4BX1-BR-P	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL70-RLD-4BX1-HX-SL	IL70-RLD-4BX1-HX-SL-P	100	1/4-20	1/2	3/4	4	1-3/4	1	3/16
IL70-RLD-4BX15-BR	IL70-RLD-4BX15-BR-P	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL70-RLD-4BX15-HX-S	IL70-RLD-4BX15-HX-SL-P	100	1/4-20	1/2	3/4	4	2-1/4	1-1/2	3/16
IL70-RLD-4B-BR	IL70-RLD-4B-BR-P	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-4B-HX-SL	IL70-RLD-4B-HX-SL-P	100	1/4-20	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-5BX1-BR	IL70-RLD-5BX1-BR-P	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL70-RLD-5BX1-HX-SL	IL70-RLD-5BX1-HX-SL-P	400	5/16-18	1/2	3/4	4	1-3/4	1	3/16
IL70-RLD-5B-BR	IL70-RLD-5B-BR-P	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-5B-HX-SL	IL70-RLD-5B-HX-SL-P	400	5/16-18	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-5BX3-BR	IL70-RLD-5BX3-BR-P	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL70-RLD-5BX3-HX-SL	IL70-RLD-5BX3-HX-SL-P	400	5/16-18	1/2	3/4	4	3-3/4	3	3/16
IL70-RLD-6B-BR	IL70-RLD-6B-BR-P	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-6B-HX-SL	IL70-RLD-6B-HX-SL-P	750	3/8-16	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-6BX3-BR	IL70-RLD-6BX3-BR-P	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL70-RLD-6BX3-HX-SL	IL70-RLD-6BX3-HX-SL-P	750	3/8-16	1/2	3/4	4	3-3/4	3	3/16
IL70-RLD-6BX4-BR	IL70-RLD-6BX4-BR-P	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL70-RLD-6BX4-HX-SL	IL70-RLD-6BX4-HX-SL-P	750	3/8-16	1/2	3/4	4	4-3/4	4	3/16
IL70-RLD-7B-BR	IL70-RLD-7B-BR-P	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-7B-HX-SL	IL70-RLD-7B-HX-SL-P	1500	1/2-13	1/2	3/4	4	2-3/4	2	3/16
IL70-RLD-7BX3-BR	IL70-RLD-7BX3-BR-P	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL70-RLD-7BX3-HX-SL	IL70-RLD-7BX3-HX-SL-P	1500	1/2-13	1/2	3/4	4	3-3/4	3	3/16
IL70-RLD-7BX4-BR	IL70-RLD-7BX4-BR-P	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16
IL70-RLD-7BX4-HX-SL	IL70-RLD-7BX4-HX-SL-P	1500	1/2-13	1/2	3/4	4	4-3/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Heavy-Duty Leveler catalog.

More thread sizes and length options for this steel swivel base design in IEC's Heavy-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

To order with 1/8" black rubber pad, (add "-P").

To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add, "-H"). Only available on 4" base.


RUGGEDIZED LIGHT DUTY GLIDES
HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment


 Top Hex (-HX)
and Slot (-SL)

- Soft-Flex® (30-A Durometer) Fixed Stud Vibe-Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL82-HPVG-4Bx1/4-30	IL82-HPVG-4BSx1/4-30	40	1/4-20	1-1/2	1/4	1
IL82-HPVG-4Bx1/2-30	IL82-HPVG-4BSx1/2-30	40	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx1/2-HX-SL-30		40	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx3/4-30	IL82-HPVG-4BSx3/4-30	40	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx3/4-HX-SL-30		40	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx1-30	IL82-HPVG-4BSx1-30	40	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx1-HX-SL-30		40	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx125-30	IL82-HPVG-4BSx125-30	40	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx125-HX-SL-30		40	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx150-30	IL82-HPVG-4BSx150-30	40	1/4-20	1-1/2	1-1/2	1
IL82-HPVG-4Bx175-30	IL82-HPVG-4BSx175-30	40	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx175-HX-SL-30		40	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx2-30	IL82-HPVG-4BSx2-30	40	1/4-20	1-1/2	2	1
IL82-HPVG-4Bx275-30	IL82-HPVG-4BSx275-30	40	1/4-20	1-1/2	2-3/4	1
IL82-HPVG-5Bx1/4-30	IL82-HPVG-5BSx1/4-30	40	5/16-18	1-1/2	1/4	1
IL82-HPVG-5Bx1/2-30	IL82-HPVG-5BSx1/2-30	40	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx1/2-HX-SL-30		40	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx3/4-30	IL82-HPVG-5BSx3/4-30	40	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx3/4-HX-SL-30		40	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx1-30	IL82-HPVG-5BSx1-30	40	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx1-HX-SL-30		40	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx125-HX-SL-30		40	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx125-30	IL82-HPVG-5BSx125-30	40	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx175-30	IL82-HPVG-5BSx175-30	40	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx175-HX-SL-30		40	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx225-HX-SL-30		40	5/16-18	1-1/2	2-1/4	1
IL82-HPVG-6Bx1/4-30	IL82-HPVG-6BSx1/4-30	40	3/8-16	1-1/2	1/4	1
IL82-HPVG-6Bx1/2-30	IL82-HPVG-6BSx1/2-30	40	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx1/2-HX-SL-30		40	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx3/4-HX-SL-30		40	3/8-16	1-1/2	3/4	1
IL82-HPVG-6Bx1-30	IL82-HPVG-6BSx1-30	40	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx1-HX-SL-30		40	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx125-30	IL82-HPVG-6BSx125-30	40	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx125-HX-SL-30		40	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx150-30	IL82-HPVG-6BSx150-30	40	3/8-16	1-1/2	1-1/2	1
IL82-HPVG-6Bx175-HX-SL-30		40	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx175-30	IL82-HPVG-6BSx175-30	40	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx238-30	IL82-HPVG-6BSx238-30	40	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-SL-30		40	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-HX-SL-30		40	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx275-HX-SL-30		40	3/8-16	1-1/2	2-3/4	1
IL82-HPVG-6Bx338-HX-SL-30		40	3/8-16	1-1/2	3-3/8	1
IL82-HPVG-7Bx3/4-30	IL82-HPVG-7BSx3/4-30	40	1/2-13	1-1/2	3/4	1
IL82-HPVG-7Bx1-30	IL82-HPVG-7BSx1-30	40	1/2-13	1-1/2	1	1
IL82-HPVG-7Bx125-30	IL82-HPVG-7BSx125-30	40	1/2-13	1-1/2	1-1/4	1
IL82-HPVG-7Bx150-30	IL82-HPVG-7BSx150-30	40	1/2-13	1-1/2	1-1/2	1
IL82-HPVG-7Bx2-30	IL82-HPVG-7BSx2-30	40	1/2-13	1-1/2	2	1
IL82-HPVG-7Bx238-30		40	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx238-HX-30		40	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx278-30	IL82-HPVG-7BSx278-30	40	1/2-13	1-1/2	2-7/8	1
IL82-HPVG-7Bx3-HX-30		40	1/2-13	1-1/2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE	Standard-Flex® TPE	Firm-Flex® TPU	Hard-Flex® TPU	Extra Hard (Skate Wheel)
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)	Medium Hard (Pink Eraser)	Medium Hard (Wiper Blades)	Hard (Tire Tread)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35	40 45 50 55 60 65 70 75 80 85 90 95 100				

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



Top Hex (-HX)
and Slot (-SL)



Vibration Glide Bottom

– Soft-Flex® (30-A Durometer) Fixed Stud Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL84-HPVG-4Bx1/4-30	IL84-HPVG-4BSx1/4-30	50	1/4-20	2	1/4	1
IL84-HPVG-4Bx1/2-30	IL84-HPVG-4BSx1/2-30	50	1/4-20	2	1/2	1
IL84-HPVG-4Bx1/2-HX-SL-30		50	1/4-20	2	1/2	1
IL84-HPVG-4Bx3/4-30	IL84-HPVG-4BSx3/4-30	50	1/4-20	2	3/4	1
IL84-HPVG-4Bx3/4-HX-SL-30		50	1/4-20	2	3/4	1
IL84-HPVG-4Bx1-30	IL84-HPVG-4BSx1-30	50	1/4-20	2	1	1
IL84-HPVG-4Bx1-HX-SL-30		50	1/4-20	2	1	1
IL84-HPVG-4Bx125-30	IL84-HPVG-4BSx125-30	50	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx125-HX-SL-30		50	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx150-30	IL84-HPVG-4BSx150-30	50	1/4-20	2	1-1/2	1
IL84-HPVG-4Bx175-30	IL84-HPVG-4BSx175-30	50	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx175-HX-SL-30		50	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx2-30	IL84-HPVG-4BSx2-30	50	1/4-20	2	2	1
IL84-HPVG-4Bx275-30	IL84-HPVG-4BSx275-30	50	1/4-20	2	2-3/4	1
IL84-HPVG-5Bx1/4-30	IL84-HPVG-5BSx1/4-30	50	5/16-18	2	1/4	1
IL84-HPVG-5Bx1/2-30	IL84-HPVG-5BSx1/2-30	50	5/16-18	2	1/2	1
IL84-HPVG-5Bx1/2-HX-SL-30		50	5/16-18	2	1/2	1
IL84-HPVG-5Bx3/4-30	IL84-HPVG-5BSx3/4-30	50	5/16-18	2	3/4	1
IL84-HPVG-5Bx3/4-HX-SL-30		50	5/16-18	2	3/4	1
IL84-HPVG-5Bx1-30	IL84-HPVG-5BSx1-30	50	5/16-18	2	1	1
IL84-HPVG-5Bx1-HX-SL-30		50	5/16-18	2	1	1
IL84-HPVG-5Bx125-HX-SL-30		50	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx125-30	IL84-HPVG-5BSx125-30	50	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx175-30	IL84-HPVG-5BSx175-30	50	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx175-HX-SL-30		50	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx225-HX-SL-30		50	5/16-18	2	2-1/4	1
IL84-HPVG-6Bx1/4-30	IL84-HPVG-6BSx1/4-30	50	3/8-16	2	1/4	1
IL84-HPVG-6Bx1/2-30	IL84-HPVG-6BSx1/2-30	50	3/8-16	2	1/2	1
IL84-HPVG-6Bx1/2-HX-SL-30		50	3/8-16	2	1/2	1
IL84-HPVG-6Bx3/4-HX-SL-30		50	3/8-16	2	3/4	1
IL84-HPVG-6Bx1-30	IL84-HPVG-6BSx1-30	50	3/8-16	2	1	1
IL84-HPVG-6Bx1-HX-SL-30		50	3/8-16	2	1	1
IL84-HPVG-6Bx125-30	IL84-HPVG-6BSx125-30	50	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx125-HX-SL-30		50	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx150-30	IL84-HPVG-6BSx150-30	50	3/8-16	2	1-1/2	1
IL84-HPVG-6Bx175-HX-SL-30		50	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx175-30	IL84-HPVG-6BSx175-30	50	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx238-30	IL84-HPVG-6BSx238-30	50	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-SL-30		50	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-HX-SL-30		50	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx275-HX-SL-30		50	3/8-16	2	2-3/4	1
IL84-HPVG-6Bx338-HX-SL-30		50	3/8-16	2	3-3/8	1
IL84-HPVG-7Bx3/4-30	IL84-HPVG-7BSx3/4-30	50	1/2-13	2	3/4	1
IL84-HPVG-7Bx1-30	IL84-HPVG-7BSx1-30	50	1/2-13	2	1	1
IL84-HPVG-7Bx125-30	IL84-HPVG-7BSx125-30	50	1/2-13	2	1-1/4	1
IL84-HPVG-7Bx150-30	IL84-HPVG-7BSx150-30	50	1/2-13	2	1-1/2	1
IL84-HPVG-7Bx2-30	IL84-HPVG-7BSx2-30	50	1/2-13	2	2	1
IL84-HPVG-7Bx238-30		50	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx238-HX-30		50	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx278-30	IL84-HPVG-7BSx278-30	50	1/2-13	2	2-7/8	1
IL84-HPVG-7Bx3-HX-30		50	1/2-13	2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE	Standard-Flex® TPE	Firm-Flex® TPU	Hard-Flex® TPU	Extra Hard (Skate Wheel)
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)	Medium Hard (Pink Eraser)	Medium Hard (Wiper Blades)	Hard (Tire Tread)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35	40 45 50 55 60 65 70 75 80 85 90 95 100				

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud* Vibe-Glide® (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 1/4-20 load rating is lower than the other thread sizes due to the smaller bolt head size molded into the flexible base. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



Top Hex (-HX)
and Slot (-SL)



Vibration Glide Bottom

– Standard-Flex® (45-A Durometer) Fixed Stud Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL82-HPVG-4Bx1/4-45	IL82-HPVG-4BSx1/4-45	75	1/4-20	1-1/2	1/4	1
IL82-HPVG-4Bx1/2-45	IL82-HPVG-4BSx1/2-45	75	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx1/2-HX-SL-45		75	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx3/4-45	IL82-HPVG-4BSx3/4-45	75	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx3/4-HX-SL-45		75	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx1-45	IL82-HPVG-4BSx1-45	75	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx1-HX-SL-45		75	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx125-45	IL82-HPVG-4BSx125-45	75	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx125-HX-SL-45		75	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx150-45	IL82-HPVG-4BSx150-45	75	1/4-20	1-1/2	1-1/2	1
IL82-HPVG-4Bx175-45	IL82-HPVG-4BSx175-45	75	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx175-HX-SL-45		75	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx2-45	IL82-HPVG-4BSx2-45	75	1/4-20	1-1/2	2	1
IL82-HPVG-4Bx275-45	IL82-HPVG-4BSx275-45	75	1/4-20	1-1/2	2-3/4	1
IL82-HPVG-5Bx1/4-45	IL82-HPVG-5BSx1/4-45	150	5/16-18	1-1/2	1/4	1
IL82-HPVG-5Bx1/2-45	IL82-HPVG-5BSx1/2-45	150	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx1/2-HX-SL-45		150	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx3/4-45	IL82-HPVG-5BSx3/4-45	150	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx3/4-HX-SL-45		150	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx1-45	IL82-HPVG-5BSx1-45	150	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx1-HX-SL-45		150	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx125-HX-SL-45		150	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx125-45	IL82-HPVG-5BSx125-45	150	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx175-45	IL82-HPVG-5BSx175-45	150	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx175-HX-SL-45		150	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx225-HX-SL-45		150	5/16-18	1-1/2	2-1/4	1
IL82-HPVG-6Bx1/4-45	IL82-HPVG-6BSx1/4-45	150	3/8-16	1-1/2	1/4	1
IL82-HPVG-6Bx1/2-45	IL82-HPVG-6BSx1/2-45	150	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx1/2-HX-SL-45		150	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx3/4-HX-SL-45		150	3/8-16	1-1/2	3/4	1
IL82-HPVG-6Bx1-45	IL82-HPVG-6BSx1-45	150	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx1-HX-SL-45		150	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx125-45	IL82-HPVG-6BSx125-45	150	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx125-HX-SL-45		150	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx150-45	IL82-HPVG-6BSx150-45	150	3/8-16	1-1/2	1-1/2	1
IL82-HPVG-6Bx175-HX-SL-45		150	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx175-45	IL82-HPVG-6BSx175-45	150	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx238-45	IL82-HPVG-6BSx238-45	150	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-SL-45		150	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-HX-SL-45		150	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx275-HX-SL-45		150	3/8-16	1-1/2	2-3/4	1
IL82-HPVG-6Bx338-HX-SL-45		150	3/8-16	1-1/2	3-3/8	1
IL82-HPVG-7Bx3/4-45	IL82-HPVG-7BSx3/4-45	150	1/2-13	1-1/2	3/4	1
IL82-HPVG-7Bx1-45	IL82-HPVG-7BSx1-45	150	1/2-13	1-1/2	1	1
IL82-HPVG-7Bx125-45	IL82-HPVG-7BSx125-45	150	1/2-13	1-1/2	1-1/4	1
IL82-HPVG-7Bx150-45	IL82-HPVG-7BSx150-45	150	1/2-13	1-1/2	1-1/2	1
IL82-HPVG-7Bx2-45	IL82-HPVG-7BSx2-45	150	1/2-13	1-1/2	2	1
IL82-HPVG-7Bx238-45		150	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx238-HX-45		150	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx278-45	IL82-HPVG-7BSx278-45	150	1/2-13	1-1/2	2-7/8	1
IL82-HPVG-7Bx3-HX-45		150	1/2-13	1-1/2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE	Standard-Flex® TPE	Firm-Flex® TPU	Hard-Flex® TPU	Extra Hard (Skate Wheel)
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)	Medium Hard (Pink Eraser)	Medium Hard (Wiper Blades)	Hard (Tire Tread)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100	↓	↓	↓	↓	

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 1/4-20 load rating is lower than the other thread sizes due to the smaller bolt head size molded into the flexible base. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



Top Hex (HX)
and Slot (SL)



Vibration Glide Bottom

– Standard-Flex® (45-A Durometer) Fixed Stud Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL84-HPVG-4Bx1/4-45	IL84-HPVG-4BSx1/4-45	100	1/4-20	2	1/4	1
IL84-HPVG-4Bx1/2-45	IL84-HPVG-4BSx1/2-45	100	1/4-20	2	1/2	1
IL84-HPVG-4Bx1/2-HX-SL-45		100	1/4-20	2	1/2	1
IL84-HPVG-4Bx3/4-45	IL84-HPVG-4BSx3/4-45	100	1/4-20	2	3/4	1
IL84-HPVG-4Bx3/4-HX-SL-45		100	1/4-20	2	3/4	1
IL84-HPVG-4Bx1-45	IL84-HPVG-4BSx1-45	100	1/4-20	2	1	1
IL84-HPVG-4Bx1-HX-SL-45		100	1/4-20	2	1	1
IL84-HPVG-4Bx125-45	IL84-HPVG-4BSx125-45	100	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx125-HX-SL-45		100	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx150-45	IL84-HPVG-4BSx150-45	100	1/4-20	2	1-1/2	1
IL84-HPVG-4Bx175-45	IL84-HPVG-4BSx175-45	100	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx175-HX-SL-45		100	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx2-45	IL84-HPVG-4BSx2-45	100	1/4-20	2	2	1
IL84-HPVG-4Bx275-45	IL84-HPVG-4BSx275-45	100	1/4-20	2	2-3/4	1
IL84-HPVG-5Bx1/4-45	IL84-HPVG-5BSx1/4-45	200	5/16-18	2	1/4	1
IL84-HPVG-5Bx1/2-45	IL84-HPVG-5BSx1/2-45	200	5/16-18	2	1/2	1
IL84-HPVG-5Bx1/2-HX-SL-45		200	5/16-18	2	1/2	1
IL84-HPVG-5Bx3/4-45	IL84-HPVG-5BSx3/4-45	200	5/16-18	2	3/4	1
IL84-HPVG-5Bx3/4-HX-SL-45		200	5/16-18	2	3/4	1
IL84-HPVG-5Bx1-45	IL84-HPVG-5BSx1-45	200	5/16-18	2	1	1
IL84-HPVG-5Bx1-HX-SL-45		200	5/16-18	2	1	1
IL84-HPVG-5Bx125-HX-SL-45		200	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx125-45	IL84-HPVG-5BSx125-45	200	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx175-45	IL84-HPVG-5BSx175-45	200	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx175-HX-SL-45		200	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx225-HX-SL-45		200	5/16-18	2	2-1/4	1
IL84-HPVG-6Bx1/4-45	IL84-HPVG-6BSx1/4-45	200	3/8-16	2	1/4	1
IL84-HPVG-6Bx1/2-45	IL84-HPVG-6BSx1/2-45	200	3/8-16	2	1/2	1
IL84-HPVG-6Bx1/2-HX-SL-45		200	3/8-16	2	1/2	1
IL84-HPVG-6Bx3/4-HX-SL-45		200	3/8-16	2	3/4	1
IL84-HPVG-6Bx1-45	IL84-HPVG-6BSx1-45	200	3/8-16	2	1	1
IL84-HPVG-6Bx1-HX-SL-45		200	3/8-16	2	1	1
IL84-HPVG-6Bx125-45	IL84-HPVG-6BSx125-45	200	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx125-HX-SL-45		200	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx150-45	IL84-HPVG-6BSx150-45	200	3/8-16	2	1-1/2	1
IL84-HPVG-6Bx175-HX-SL-45		200	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx175-45	IL84-HPVG-6BSx175-45	200	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx238-45	IL84-HPVG-6BSx238-45	200	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-SL-45		200	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-HX-SL-45		200	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx275-HX-SL-45		200	3/8-16	2	2-3/4	1
IL84-HPVG-6Bx338-HX-SL-45		200	3/8-16	2	3-3/8	1
IL84-HPVG-7Bx3/4-45	IL84-HPVG-7BSx3/4-45	200	1/2-13	2	3/4	1
IL84-HPVG-7Bx1-45	IL84-HPVG-7BSx1-45	200	1/2-13	2	1	1
IL84-HPVG-7Bx125-45	IL84-HPVG-7BSx125-45	200	1/2-13	2	1-1/4	1
IL84-HPVG-7Bx150-45	IL84-HPVG-7BSx150-45	200	1/2-13	2	1-1/2	1
IL84-HPVG-7Bx2-45	IL84-HPVG-7BSx2-45	200	1/2-13	2	2	1
IL84-HPVG-7Bx238-45		200	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx238-HX-45		200	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx278-45	IL84-HPVG-7BSx278-45	200	1/2-13	2	2-7/8	1
IL84-HPVG-7Bx3-HX-45		200	1/2-13	2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE		Standard-Flex® TPE		Firm-Flex® TPU		Hard-Flex® TPU		Extra Hard (Skate Wheel)	
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)		Medium Hard (Pink Eraser)		Medium Hard (Wiper Blades)		Hard (Tire Tread)		Extra Hard (Skate Wheel)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35	↓		↓		↓		↓		↓	
	10 15 20 25 30 35	40 45 50 55 60 65	70 75 80 85 90 95	100							

Copyright © 2019 IEC, Inc.


RUGGEDIZED LIGHT DUTY GLIDES
HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 1/4-20 load rating is lower than the other thread sizes due to the smaller bolt head size molded into the flexible base. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment


 Top Hex (HX)
and Slot (SL)


Vibration Glide Bottom

- Firm-Flex® (60-A Durometer) Fixed Stud Vibe-Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL82-HPVG-4Bx1/4-60	IL82-HPVG-4BSx1/4-60	100	1/4-20	1-1/2	1/4	1
IL82-HPVG-4Bx1/2-60	IL82-HPVG-4BSx1/2-60	100	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx1/2-HX-SL-60		100	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx3/4-60	IL82-HPVG-4BSx3/4-60	100	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx3/4-HX-SL-60		100	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx1-60	IL82-HPVG-4BSx1-60	100	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx1-HX-SL-60		100	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx125-60	IL82-HPVG-4BSx125-60	100	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx125-HX-SL-60		100	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx150-60	IL82-HPVG-4BSx150-60	100	1/4-20	1-1/2	1-1/2	1
IL82-HPVG-4Bx175-60	IL82-HPVG-4BSx175-60	100	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx175-HX-SL-60		100	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx2-60	IL82-HPVG-4BSx2-60	100	1/4-20	1-1/2	2	1
IL82-HPVG-4Bx275-60	IL82-HPVG-4BSx275-60	100	1/4-20	1-1/2	2-3/4	1
IL82-HPVG-5Bx1/4-60	IL82-HPVG-5BSx1/4-60	250	5/16-18	1-1/2	1/4	1
IL82-HPVG-5Bx1/2-60	IL82-HPVG-5BSx1/2-60	250	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx1/2-HX-SL-60		250	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx3/4-60	IL82-HPVG-5BSx3/4-60	250	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx3/4-HX-SL-60		250	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx1-60	IL82-HPVG-5BSx1-60	250	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx1-HX-SL-60		250	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx125-HX-SL-60		250	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx125-60	IL82-HPVG-5BSx125-60	250	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx175-60	IL82-HPVG-5BSx175-60	250	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx175-HX-SL-60		250	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx225-HX-SL-60		250	5/16-18	1-1/2	2-1/4	1
IL82-HPVG-6Bx1/4-60	IL82-HPVG-6BSx1/4-60	250	3/8-16	1-1/2	1/4	1
IL82-HPVG-6Bx1/2-60	IL82-HPVG-6BSx1/2-60	250	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx1/2-HX-SL-60		250	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx3/4-HX-SL-60		250	3/8-16	1-1/2	3/4	1
IL82-HPVG-6Bx1-60	IL82-HPVG-6BSx1-60	250	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx1-HX-SL-60		250	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx125-60	IL82-HPVG-6BSx125-60	250	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx125-HX-SL-60		250	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx150-60	IL82-HPVG-6BSx150-60	250	3/8-16	1-1/2	1-1/2	1
IL82-HPVG-6Bx175-HX-SL-60		250	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx175-60	IL82-HPVG-6BSx175-60	250	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx238-60	IL82-HPVG-6BSx238-60	250	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-SL-60		250	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-HX-SL-60		250	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx275-HX-SL-60		250	3/8-16	1-1/2	2-3/4	1
IL82-HPVG-6Bx338-HX-SL-60		250	3/8-16	1-1/2	3-3/8	1
IL82-HPVG-7Bx3/4-60	IL82-HPVG-7BSx3/4-60	250	1/2-13	1-1/2	3/4	1
IL82-HPVG-7Bx1-60	IL82-HPVG-7BSx1-60	250	1/2-13	1-1/2	1	1
IL82-HPVG-7Bx125-60	IL82-HPVG-7BSx125-60	250	1/2-13	1-1/2	1-1/4	1
IL82-HPVG-7Bx150-60	IL82-HPVG-7BSx150-60	250	1/2-13	1-1/2	1-1/2	1
IL82-HPVG-7Bx2-60	IL82-HPVG-7BSx2-60	250	1/2-13	1-1/2	2	1
IL82-HPVG-7Bx238-60		250	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx238-HX-60		250	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx278-60	IL82-HPVG-7BSx278-60	250	1/2-13	1-1/2	2-7/8	1
IL82-HPVG-7Bx3-HX-60		250	1/2-13	1-1/2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE	Standard-Flex® TPE	Firm-Flex® TPU	Hard-Flex® TPU	Extra Hard (Skate Wheel)
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)	Medium Hard (Pink Eraser)	Medium Hard (Wiper Blades)	Hard (Tire Tread)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100	↓	↓	↓	↓	

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 1/4-20 load rating is lower than the other thread sizes due to the smaller bolt head size molded into the flexible base. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



Top Hex (-HX)
and Slot (-SL)



Vibration Glide Bottom

- Firm-Flex® (60-A Durometer) Fixed Stud Vibe-Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL84-HPVG-4Bx1/4-60	IL84-HPVG-4BSx1/4-60	100	1/4-20	2	1/4	1
IL84-HPVG-4Bx1/2-60	IL84-HPVG-4BSx1/2-60	100	1/4-20	2	1/2	1
IL84-HPVG-4Bx1/2-HX-SL-60		100	1/4-20	2	1/2	1
IL84-HPVG-4Bx3/4-60	IL84-HPVG-4BSx3/4-60	100	1/4-20	2	3/4	1
IL84-HPVG-4Bx3/4-HX-SL-60		100	1/4-20	2	3/4	1
IL84-HPVG-4Bx1-60	IL84-HPVG-4BSx1-60	100	1/4-20	2	1	1
IL84-HPVG-4Bx1-HX-SL-60		100	1/4-20	2	1	1
IL84-HPVG-4Bx125-60	IL84-HPVG-4BSx125-60	100	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx125-HX-SL-60		100	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx1300-60	IL84-HPVG-4BSx1300-60	100	1/4-20	2	1-1/2	1
IL84-HPVG-4Bx175-60	IL84-HPVG-4BSx175-60	100	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx175-HX-SL-60		100	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx2-60	IL84-HPVG-4BSx2-60	100	1/4-20	2	2	1
IL84-HPVG-4Bx275-60	IL84-HPVG-4BSx275-60	100	1/4-20	2	2-3/4	1
IL84-HPVG-5Bx1/4-60	IL84-HPVG-5BSx1/4-60	300	5/16-18	2	1/4	1
IL84-HPVG-5Bx1/2-60	IL84-HPVG-5BSx1/2-60	300	5/16-18	2	1/2	1
IL84-HPVG-5Bx1/2-HX-SL-60		300	5/16-18	2	1/2	1
IL84-HPVG-5Bx3/4-60	IL84-HPVG-5BSx3/4-60	300	5/16-18	2	3/4	1
IL84-HPVG-5Bx3/4-HX-SL-60		300	5/16-18	2	3/4	1
IL84-HPVG-5Bx1-60	IL84-HPVG-5BSx1-60	300	5/16-18	2	1	1
IL84-HPVG-5Bx1-HX-SL-60		300	5/16-18	2	1	1
IL84-HPVG-5Bx125-60	IL84-HPVG-5BSx125-60	300	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx175-60	IL84-HPVG-5BSx175-60	300	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx175-HX-SL-60		300	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx225-HX-SL-60		300	5/16-18	2	2-1/4	1
IL84-HPVG-6Bx1/4-60	IL84-HPVG-6BSx1/4-60	300	3/8-16	2	1/4	1
IL84-HPVG-6Bx1/2-60	IL84-HPVG-6BSx1/2-60	300	3/8-16	2	1/2	1
IL84-HPVG-6Bx1/2-HX-SL-60		300	3/8-16	2	1/2	1
IL84-HPVG-6Bx3/4-HX-SL-60		300	3/8-16	2	3/4	1
IL84-HPVG-6Bx1-60	IL84-HPVG-6BSx1-60	300	3/8-16	2	1	1
IL84-HPVG-6Bx1-HX-SL-60		300	3/8-16	2	1	1
IL84-HPVG-6Bx125-60	IL84-HPVG-6BSx125-60	300	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx125-HX-SL-60		300	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx1300-60	IL84-HPVG-6BSx1300-60	300	3/8-16	2	1-1/2	1
IL84-HPVG-6Bx175-HX-SL-60		300	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx175-60	IL84-HPVG-6BSx175-60	300	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx238-60	IL84-HPVG-6BSx238-60	300	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-SL-60		300	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-HX-SL-60		300	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx275-HX-SL-60		300	3/8-16	2	2-3/4	1
IL84-HPVG-6Bx338-HX-SL-60		300	3/8-16	2	3-3/8	1
IL84-HPVG-7Bx3/4-60	IL84-HPVG-7BSx3/4-60	300	1/2-13	2	3/4	1
IL84-HPVG-7Bx1-60	IL84-HPVG-7BSx1-60	300	1/2-13	2	1	1
IL84-HPVG-7Bx125-60	IL84-HPVG-7BSx125-60	300	1/2-13	2	1-1/4	1
IL84-HPVG-7Bx150-60	IL84-HPVG-7BSx150-60	300	1/2-13	2	1-1/2	1
IL84-HPVG-7Bx2-60	IL84-HPVG-7BSx2-60	300	1/2-13	2	2	1
IL84-HPVG-7Bx238-60		300	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx238-HX-60		300	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx278-60	IL84-HPVG-7BSx278-60	300	1/2-13	2	2-7/8	1
IL84-HPVG-7Bx3-HX-60		300	1/2-13	2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE		Standard-Flex® TPE		Firm-Flex® TPU		Hard-Flex® TPU		Extra Hard (Skate Wheel)	
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)		Medium Hard (Pink Eraser)		Medium Hard (Wiper Blades)		Hard (Tire Tread)		Extra Hard (Skate Wheel)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35	↓		↓		↓		↓		↓	
	10 15 20 25 30 35	40 45 50 55 60 65	70 75 80 85 90 95	100							

Copyright © 2019 IEC, Inc.


RUGGEDIZED LIGHT DUTY GLIDES
HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 1/4-20 load rating is lower than the other thread sizes due to the smaller bolt head size molded into the flexible base. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment


 Top Hex (-HX)
and Slot (-SL)


Vibration Glide Bottom

- Hard-Flex® (75-A Durometer) Fixed Stud Vibe-Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL82-HPVG-4Bx1/4-75	IL82-HPVG-4BSx1/4-75	100	1/4-20	1-1/2	1/4	1
IL82-HPVG-4Bx1/2-75	IL82-HPVG-4BSx1/2-75	100	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx1/2-HX-SL-75		100	1/4-20	1-1/2	1/2	1
IL82-HPVG-4Bx3/4-75	IL82-HPVG-4BSx3/4-75	100	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx3/4-HX-SL-75		100	1/4-20	1-1/2	3/4	1
IL82-HPVG-4Bx1-75	IL82-HPVG-4BSx1-75	100	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx1-HX-SL-75		100	1/4-20	1-1/2	1	1
IL82-HPVG-4Bx125-75	IL82-HPVG-4BSx125-75	100	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx125-HX-SL-75		100	1/4-20	1-1/2	1-1/4	1
IL82-HPVG-4Bx150-75	IL82-HPVG-4BSx150-75	100	1/4-20	1-1/2	1-1/2	1
IL82-HPVG-4Bx175-75	IL82-HPVG-4BSx175-75	100	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx175-HX-SL-75		100	1/4-20	1-1/2	1-3/4	1
IL82-HPVG-4Bx2-75	IL82-HPVG-4BSx2-75	100	1/4-20	1-1/2	2	1
IL82-HPVG-4Bx275-75	IL82-HPVG-4BSx275-75	100	1/4-20	1-1/2	2-3/4	1
IL82-HPVG-5Bx1/4-75	IL82-HPVG-5BSx1/4-75	400	5/16-18	1-1/2	1/4	1
IL82-HPVG-5Bx1/2-75	IL82-HPVG-5BSx1/2-75	400	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx1/2-HX-SL-75		400	5/16-18	1-1/2	1/2	1
IL82-HPVG-5Bx3/4-75	IL82-HPVG-5BSx3/4-75	400	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx3/4-HX-SL-75		400	5/16-18	1-1/2	3/4	1
IL82-HPVG-5Bx1-75	IL82-HPVG-5BSx1-75	400	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx1-HX-SL-75		400	5/16-18	1-1/2	1	1
IL82-HPVG-5Bx125-75	IL82-HPVG-5BSx125-75	400	5/16-18	1-1/2	1-1/4	1
IL82-HPVG-5Bx175-75	IL82-HPVG-5BSx175-75	400	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx175-HX-SL-75		400	5/16-18	1-1/2	1-3/4	1
IL82-HPVG-5Bx225-HX-SL-75		400	5/16-18	1-1/2	2-1/4	1
IL82-HPVG-6Bx1/4-75	IL82-HPVG-6BSx1/4-75	400	3/8-16	1-1/2	1/4	1
IL82-HPVG-6Bx1/2-75	IL82-HPVG-6BSx1/2-75	400	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx1/2-HX-SL-75		400	3/8-16	1-1/2	1/2	1
IL82-HPVG-6Bx3/4-HX-SL-75		400	3/8-16	1-1/2	3/4	1
IL82-HPVG-6Bx1-75	IL82-HPVG-6BSx1-75	400	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx1-HX-SL-75		400	3/8-16	1-1/2	1	1
IL82-HPVG-6Bx125-75	IL82-HPVG-6BSx125-75	400	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx125-HX-SL-75		400	3/8-16	1-1/2	1-1/4	1
IL82-HPVG-6Bx150-75	IL82-HPVG-6BSx150-75	400	3/8-16	1-1/2	1-1/2	1
IL82-HPVG-6Bx175-HX-SL-75		400	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx175-75	IL82-HPVG-6BSx175-75	400	3/8-16	1-1/2	1-3/4	1
IL82-HPVG-6Bx238-75	IL82-HPVG-6BSx238-75	400	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-SL-75		400	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx238-HX-SL-75		400	3/8-16	1-1/2	2-3/8	1
IL82-HPVG-6Bx275-HX-SL-75		400	3/8-16	1-1/2	2-3/4	1
IL82-HPVG-6Bx338-HX-SL-75		400	3/8-16	1-1/2	3-3/8	1
IL82-HPVG-7Bx3/4-75	IL82-HPVG-7BSx3/4-75	400	1/2-13	1-1/2	3/4	1
IL82-HPVG-7Bx1-75	IL82-HPVG-7BSx1-75	400	1/2-13	1-1/2	1	1
IL82-HPVG-7Bx125-75	IL82-HPVG-7BSx125-75	400	1/2-13	1-1/2	1-1/4	1
IL82-HPVG-7Bx150-75	IL82-HPVG-7BSx150-75	400	1/2-13	1-1/2	1-1/2	1
IL82-HPVG-7Bx2-75	IL82-HPVG-7BSx2-75	400	1/2-13	1-1/2	2	1
IL82-HPVG-7Bx238-75		400	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx238-HX-75		400	1/2-13	1-1/2	2-3/8	1
IL82-HPVG-7Bx278-75	IL82-HPVG-7BSx278-75	400	1/2-13	1-1/2	2-7/8	1
IL82-HPVG-7Bx3-HX-75		400	1/2-13	1-1/2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE	Standard-Flex® TPE	Firm-Flex® TPU	Hard-Flex® TPU	Extra Hard (Skate Wheel)
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)	Medium Hard (Pink Eraser)	Medium Hard (Wiper Blades)	Hard (Tire Tread)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35 40 45 50 55 60 65 70 75 80 85 90 95 100	↓	↓	↓	↓	

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED STUD VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Stud Vibe-Glides®

The IEC *high-profile fixed stud Vibe-Glide®* (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 1/4-20 load rating is lower than the other thread sizes due to the smaller bolt head size molded into the flexible base. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**


The steel stud has trivalent clear zinc plating. Also available with a steel female socket with 1/2-13 or 3/8-16 thread, or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless studs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- RoHS compliant
- Top hex and slot options

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



Top Hex (HX)
and Slot (SL)



- Hard-Flex® (75-A Durometer) Fixed Stud Vibe-Glide® -

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Stud Vibration Glides						
IL84-HPVG-4Bx1/4-75	IL84-HPVG-4BSx1/4-75	100	1/4-20	2	1/4	1
IL84-HPVG-4Bx1/2-75	IL84-HPVG-4BSx1/2-75	100	1/4-20	2	1/2	1
IL84-HPVG-4Bx1/2-HX-SL-75		100	1/4-20	2	1/2	1
IL84-HPVG-4Bx3/4-75	IL84-HPVG-4BSx3/4-75	100	1/4-20	2	3/4	1
IL84-HPVG-4Bx3/4-HX-SL-75		100	1/4-20	2	3/4	1
IL84-HPVG-4Bx1-75	IL84-HPVG-4BSx1-75	100	1/4-20	2	1	1
IL84-HPVG-4Bx1-HX-SL-75		100	1/4-20	2	1	1
IL84-HPVG-4Bx125-75	IL84-HPVG-4BSx125-75	100	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx125-HX-SL-75		100	1/4-20	2	1-1/4	1
IL84-HPVG-4Bx150-75	IL84-HPVG-4BSx150-75	100	1/4-20	2	1-1/2	1
IL84-HPVG-4Bx175-75	IL84-HPVG-4BSx175-75	100	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx175-HX-SL-75		100	1/4-20	2	1-3/4	1
IL84-HPVG-4Bx2-75	IL84-HPVG-4BSx2-75	100	1/4-20	2	2	1
IL84-HPVG-4Bx275-75	IL84-HPVG-4BSx275-75	100	1/4-20	2	2-3/4	1
IL84-HPVG-5Bx1/4-75	IL84-HPVG-5BSx1/4-75	500	5/16-18	2	1/4	1
IL84-HPVG-5Bx1/2-75	IL84-HPVG-5BSx1/2-75	500	5/16-18	2	1/2	1
IL84-HPVG-5Bx1/2-HX-SL-75		500	5/16-18	2	1/2	1
IL84-HPVG-5Bx3/4-75	IL84-HPVG-5BSx3/4-75	500	5/16-18	2	3/4	1
IL84-HPVG-5Bx3/4-HX-SL-75		500	5/16-18	2	3/4	1
IL84-HPVG-5Bx1-75	IL84-HPVG-5BSx1-75	500	5/16-18	2	1	1
IL84-HPVG-5Bx1-HX-SL-75		500	5/16-18	2	1	1
IL84-HPVG-5Bx125-HX-SL-75		500	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx125-75	IL84-HPVG-5BSx125-75	500	5/16-18	2	1-1/4	1
IL84-HPVG-5Bx175-75	IL84-HPVG-5BSx175-75	500	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx175-HX-SL-75		500	5/16-18	2	1-3/4	1
IL84-HPVG-5Bx225-HX-SL-75		500	5/16-18	2	2-1/4	1
IL84-HPVG-6Bx1/4-75	IL84-HPVG-6BSx1/4-75	500	3/8-16	2	1/4	1
IL84-HPVG-6Bx1/2-75	IL84-HPVG-6BSx1/2-75	500	3/8-16	2	1/2	1
IL84-HPVG-6Bx1/2-HX-SL-75		500	3/8-16	2	1/2	1
IL84-HPVG-6Bx3/4-HX-SL-75		500	3/8-16	2	3/4	1
IL84-HPVG-6Bx1-75	IL84-HPVG-6BSx1-75	500	3/8-16	2	1	1
IL84-HPVG-6Bx1-HX-SL-75		500	3/8-16	2	1	1
IL84-HPVG-6Bx125-75	IL84-HPVG-6BSx125-75	500	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx125-HX-SL-75		500	3/8-16	2	1-1/4	1
IL84-HPVG-6Bx150-75	IL84-HPVG-6BSx150-75	500	3/8-16	2	1-1/2	1
IL84-HPVG-6Bx175-HX-SL-75		500	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx175-75	IL84-HPVG-6BSx175-75	500	3/8-16	2	1-3/4	1
IL84-HPVG-6Bx238-75	IL84-HPVG-6BSx238-75	500	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx238-SL-75		500	3/8-16	2	2-3/8	1
IL84-HPVG-6Bx275-HX-SL-75		500	3/8-16	2	2-3/4	1
IL84-HPVG-6Bx338-HX-SL-75		500	3/8-16	2	3-3/8	1
IL84-HPVG-7Bx3/4-75	IL84-HPVG-7BSx3/4-75	500	1/2-13	2	3/4	1
IL84-HPVG-7Bx1-75	IL84-HPVG-7BSx1-75	500	1/2-13	2	1	1
IL84-HPVG-7Bx125-75	IL84-HPVG-7BSx125-75	500	1/2-13	2	1-1/4	1
IL84-HPVG-7Bx150-75	IL84-HPVG-7BSx150-75	500	1/2-13	2	1-1/2	1
IL84-HPVG-7Bx2-75	IL84-HPVG-7BSx2-75	500	1/2-13	2	2	1
IL84-HPVG-7Bx238-75		500	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx238-HX-75		500	1/2-13	2	2-3/8	1
IL84-HPVG-7Bx278-75	IL84-HPVG-7BSx278-75	500	1/2-13	2	2-7/8	1
IL84-HPVG-7Bx3-HX-75		500	1/2-13	2	3	1

IEC Vibe-Glide® TPE & TPU standard offerings		Soft-Flex® TPE		Standard-Flex® TPE		Firm-Flex® TPU		Hard-Flex® TPU		Extra Hard (Skate Wheel)	
Type	Soft (Mouse Pad)	Medium Soft (Bottle Nipple)		Medium Hard (Pink Eraser)		Medium Hard (Wiper Blades)		Hard (Tire Tread)		Extra Hard (Skate Wheel)	
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10 15 20 25 30 35	↓		↓		↓		↓		↓	
	10 15 20 25 30 35	40 45 50 55 60 65	70 75 80 85 90 95	100							

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED SOCKET VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER

Ruggedized® Light Duty (RLD) Hi-Pro® Fixed Socket Vibe-Glides®

The IEC high-profile fixed socket Vibe-Glide® (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2". **The load rating shown is based on the weight distribution being applied to the thread. If equipment is resting directly on the base, the load rating is 3x higher. The 2" base has a higher load rating due to the thicker ring sizes on the bottom of the flexible base.**

The steel socket has trivalent clear zinc plating. Also available with a steel stud or a thru-hole to fit a 5/16" or smaller screw to attach to your equipment or furniture. The base can be produced in various colors (brown, tan, gray, etc.) upon request. Just let us know your requirements and we will work with you.

Features



- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1000 lbs
- Steel and Stainless sockets
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- Oil and solvent resistant
- RoHS compliant

Applications

- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



Socket Glide Bottom

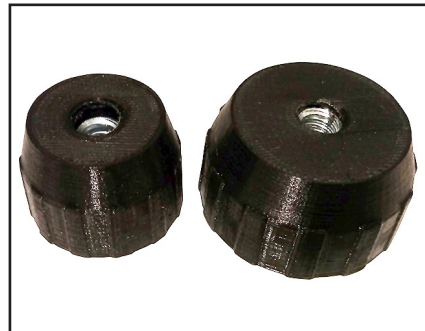

– Soft-Flex® (30-A Durometer) Fixed Socket Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Socket Vibration Glides						
IL82-HPVG-6B-T-30	IL82-HPVG-6BS-T-30	40	3/8-16	1-1/2	1/2	1
IL82-HPVG-7B-T-30	IL82-HPVG-7BS-T-30	40	1/2-13	1-1/2	1/2	1
IL84-HPVG-6B-T-30	IL84-HPVG-6BS-T-30	50	3/8-16	2	1/2	1
IL84-HPVG-7B-T-30	IL84-HPVG-7BS-T-30	50	1/2-13	2	1/2	1

– Standard-Flex® (45-A Durometer) Fixed Socket Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Socket Vibration Glides						
IL82-HPVG-6B-T-45	IL82-HPVG-6BS-T-45	150	3/8-16	1-1/2	1/2	1
IL82-HPVG-7B-T-45	IL82-HPVG-7BS-T-45	150	1/2-13	1-1/2	1/2	1
IL84-HPVG-6B-T-45	IL84-HPVG-6BS-T-45	200	3/8-16	2	1/2	1
IL84-HPVG-7B-T-45	IL84-HPVG-7BS-T-45	200	1/2-13	2	1/2	1

– Firm-Flex® (60-A Durometer) Fixed Socket Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Socket Vibration Glides						
IL82-HPVG-6B-T-60	IL82-HPVG-6BS-T-60	250	3/8-16	1-1/2	1/2	1
IL82-HPVG-7B-T-60	IL82-HPVG-7BS-T-60	250	1/2-13	1-1/2	1/2	1
IL84-HPVG-6B-T-60	IL84-HPVG-6BS-T-60	300	3/8-16	2	1/2	1
IL84-HPVG-7B-T-60	IL84-HPVG-7BS-T-60	300	1/2-13	2	1/2	1

– Hard-Flex® (75-A Durometer) Fixed Socket Vibe-Glide® –

Steel	Stainless Steel	Load	Thread	A	B	C
Steel and Stainless Steel High Profile Fixed Socket Vibration Glides						
IL82-HPVG-6B-T-75	IL82-HPVG-6BS-T-75	400	3/8-16	1-1/2	1/2	1
IL82-HPVG-7B-T-75	IL82-HPVG-7BS-T-75	400	1/2-13	1-1/2	1/2	1
IL84-HPVG-6B-T-75	IL84-HPVG-6BS-T-75	500	3/8-16	2	1/2	1
IL84-HPVG-7B-T-75	IL84-HPVG-7BS-T-75	500	1/2-13	2	1/2	1

IEC Vibe-Glide® TPE & TPU standard offerings						Soft-Flex® TPE			Standard-Flex® TPE			Firm-Flex® TPU			Hard-Flex® TPU					
Type	Soft (Mouse Pad)			Medium Soft (Bottle Nipple)			Medium Hard (Pink Eraser) (Wiper Blades)						Hard (Tire Tread)			Extra Hard (Skate Wheel)				
Shore A						↓				↓				↓						
Rubber, Elastomer (TPE) & Urethane (TPU)	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100	

Copyright © 2019 IEC, Inc.



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Ruggedized® Light Duty (RLD) Thru-Hole (Non-Threaded) Vibe-Glides®

The IEC *high-profile non-threaded* Vibe-Glide® (Patent pending) features IEC's Ridge-Grip® design and are ideal for vibration and noise dampening, anti-skid, anti-marring and electrical isolation applications. It has a thru-hole to accept your own wood screw, machine screw or rivet, etc. Especially useful for raising and isolating electronic equipment, appliances, scales, audio and video equipment, optics, furniture, displays, racks, instruments, and for automotive, medical, fitness, marine, machinery, hotel and restaurant and HVAC applications. IEC's unique vibration design features a series of inner rings of varying heights and thicknesses to provide superior vibration dampening and stability in a compact form. The high-profile feature aids cleaning, ventilation, inspection and equipment isolation.

Available in multiple materials including Urethane (TPU), Elastomer (TPE), and Polypropylene (non-vibration dampening). TPU and TPE can be made with differing shore (-A) hardness (durometer) in order to achieve the appropriate combination of load support rating and vibration dampening effectiveness. Our standard offerings are listed here. Available in two base diameters, 1-1/2" and 2".

Features

- Vibration dampening rubber bases
- Ridge-Grip® base design
- Loads to 1500 lbs
- Anti-skid and anti-marr
- Electrical isolation
- Corrosion resistant
- Oil and solvent resistant
- RoHS compliant

Applications


- Scales
- Audio and video equipment
- Appliances
- Instruments
- Furniture
- HVAC
- Stages
- Electronic and medical equipment
- Enclosures
- Racks
- Conveyors
- Fitness equipment
- Machinery
- Work Tables
- Displays
- Kitchen equipment



RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® FIXED SOCKET VIBRATION GLIDES

1-1/2" to 2" BASE DIAMETER



– Soft-Flex® (30-A Durometer) Thru-Hole (Non-Threaded) Socket Vibe-Glide® –

P/N	Load	Hole Size	A	B	C
High Profile Poly Base Thru-Hole Non-Threaded Socket Glides					
IL82-HPVG-THNT-30	125	11/32	1-1/2	1/2	1
IL84-HPVG-THNT-30	150	11/32	2	1/2	1

– Standard-Flex® (45-A Durometer) Thru-Hole (Non-Threaded) Socket Vibe-Glide® –

P/N	Load	Hole Size	A	B	C
High Profile Poly Base Thru-Hole Non-Threaded Socket Glides					
IL82-HPVG-THNT-45	450	11/32	1-1/2	1/2	1
IL84-HPVG-THNT-45	600	11/32	2	1/2	1

– Firm-Flex® (60-A Durometer) Thru-Hole (Non-Threaded) Socket Vibe-Glide® –

P/N	Load	Hole Size	A	B	C
High Profile Poly Base Thru-Hole Non-Threaded Socket Glides					
IL82-HPVG-THNT-60	750	11/32	1-1/2	1/2	1
IL84-HPVG-THNT-60	900	11/32	2	1/2	1

– Hard-Flex® (75-A Durometer) Thru-Hole (Non-Threaded) Socket Vibe-Glide® –

P/N	Load	Hole Size	A	B	C
High Profile Poly Base Thru-Hole Non-Threaded Socket Glides					
IL82-HPVG-THNT-75	1000	11/32	1-1/2	1/2	1
IL84-HPVG-THNT-75	1500	11/32	2	1/2	1

IEC Vibe-Glide® TPE & TPU standard offerings					Soft-Flex® TPE			Standard-Flex® TPE		Firm-Flex® TPU			Hard-Flex® TPU						
Type	Soft (Mouse Pad)			Medium Soft (Bottle Nipple)			Medium Hard (Pink Eraser) (Wiper Blades)						Hard (Tire Tread)			Extra Hard (Skate Wheel)			
Shore A Rubber, Elastomer (TPE) & Urethane (TPU)	10	15	20	25	30	35	40	45	50	55	60	65	70	75	80	85	90	95	100

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® POLY FIXED STUD

1-1/2" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) HI-PRO® POLY BASE FIXED STUD GLIDE


The IEC High Profile Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Black zinc plated steel stud and black polypropylene base, 1" thick. Two base sizes to choose from (1-1/2" to 2").

Features



- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- 8 base diameters
- RoHS compliant

Applications

- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



HI-PRO® Glide Bottom

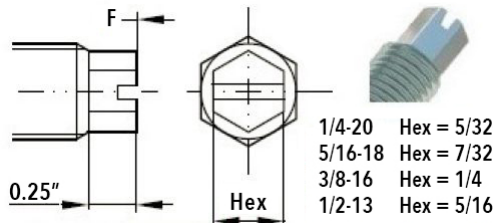TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)**TOP ALLEN-DRIVE BROACHED HEX (-BR)**

Top allen-drive broached hex (-BR)
Dimension table at bottom of page.

HI PRO® FIXED STUD GLIDES — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL140-RLD-4BX1-BR	100	1/4-20	1/2	1-1/4	1-1/2	2-1/4	1	3/16
IL140-RLD-4BX1-HX-SL	100	1/4-20	1/2	1-1/4	1-1/2	2-1/4	1	3/16
IL140-RLD-4BX15-BR	100	1/4-20	1/2	1-1/4	1-1/2	2-3/4	1-1/2	3/16
IL140-RLD-4BX15-HX-SL	100	1/4-20	1/2	1-1/4	1-1/2	2-3/4	1-1/2	3/16
IL140-RLD-4B-BR	100	1/4-20	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-4B-HX-SL	100	1/4-20	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-5BX1-BR	400	5/16-18	1/2	1-1/4	1-1/2	2-1/4	1	3/16
IL140-RLD-5BX1-HX-SL	400	5/16-18	1/2	1-1/4	1-1/2	2-1/4	1	3/16
IL140-RLD-5B-BR	400	5/16-18	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-5B-HX-SL	400	5/16-18	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-5BX3-BR	400	5/16-18	1/2	1-1/4	1-1/2	4-1/4	3	3/16
IL140-RLD-5BX3-HX-SL	400	5/16-18	1/2	1-1/4	1-1/2	4-1/4	3	3/16
IL140-RLD-6B-BR	750	3/8-16	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-6B-HX-SL	750	3/8-16	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-6BX3-BR	750	3/8-16	1/2	1-1/4	1-1/2	4-1/4	3	3/16
IL140-RLD-6BX3-HX-SL	750	3/8-16	1/2	1-1/4	1-1/2	4-1/4	3	3/16
IL140-RLD-6BX4-BR	750	3/8-16	1/2	1-1/4	1-1/2	5-1/4	4	3/16
IL140-RLD-6BX4-HX-SL	750	3/8-16	1/2	1-1/4	1-1/2	5-1/4	4	3/16
IL140-RLD-7B-BR	1500	1/2-13	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-7B-HX-SL	1500	1/2-13	1/2	1-1/4	1-1/2	3-1/4	2	3/16
IL140-RLD-7BX3-BR	1500	1/2-13	1/2	1-1/4	1-1/2	4-1/4	3	3/16
IL140-RLD-7BX3-HX-SL	1500	1/2-13	1/2	1-1/4	1-1/2	4-1/4	3	3/16
IL140-RLD-7BX4-BR	1500	1/2-13	1/2	1-1/4	1-1/2	5-1/4	4	3/16
IL140-RLD-7BX4-HX-SL	1500	1/2-13	1/2	1-1/4	1-1/2	5-1/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)

Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY GLIDES

HI-PRO® POLY FIXED STUD

2" BASE DIAMETER

PATENT PENDING

Ruggedized™ Light Duty (RLD) HI-PRO® POLY BASE FIXED STUD GLIDE


The IEC High Profile Steel Poly Base Fixed Stud Glide features IEC's Ridge-Grip® design and is ideal for light-duty load requirements. **The high-profile base is useful for raising kitchen equipment, furniture, grocery displays, fitness equipment, electronic equipment and other products for ease of cleaning, sweeping, mopping, ventilation, etc.** The stud will tilt several degrees under load to compensate for unlevel surfaces. Cost-effective for applications not requiring a swivel base. Black zinc plated steel stud and black polypropylene base, 1" thick. Two base sizes to choose from (1-1/2" to 2").

Features


- Black trivalent zinc
- Top hex drive options
- Top slot feature
- Loads to 1500 lbs
- 8 base diameters
- RoHS compliant

Applications


- Appliances
- Displays
- Racks
- Vending Machines
- Stages
- Decks
- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables



HI-PRO® Glide Bottom

TOP EXTERNAL SLOTTED HEX DRIVE (-HX-SL)

1/4-20 Hex = 5/32
 5/16-18 Hex = 7/32
 3/8-16 Hex = 1/4
 1/2-13 Hex = 5/16

TOP ALLEN-DRIVE BROACHED HEX (-BR)

Top allen-drive broached hex (-BR)
 Dimension table at bottom of page.

HI PRO® FIXED STUD GLIDES — 1" to 4" STUD LENGTHS

Steel	Load	A	B	C	D	E	F	G
IL141-RLD-4BX1-BR	100	1/4-20	1/2	1-1/4	2	2-1/4	1	3/16
IL141-RLD-4BX1-HX-SL	100	1/4-20	1/2	1-1/4	2	2-1/4	1	3/16
IL141-RLD-4BX15-BR	100	1/4-20	1/2	1-1/4	2	2-3/4	1-1/2	3/16
IL141-RLD-4BX15-HX-SL	100	1/4-20	1/2	1-1/4	2	2-3/4	1-1/2	3/16
IL141-RLD-4B-BR	100	1/4-20	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-4B-HX-SL	100	1/4-20	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-5BX1-BR	400	5/16-18	1/2	1-1/4	2	2-1/4	1	3/16
IL141-RLD-5BX1-HX-SL	400	5/16-18	1/2	1-1/4	2	2-1/4	1	3/16
IL141-RLD-5B-BR	400	5/16-18	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-5B-HX-SL	400	5/16-18	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-5BX3-BR	400	5/16-18	1/2	1-1/4	2	4-1/4	3	3/16
IL141-RLD-5BX3-HX-SL	400	5/16-18	1/2	1-1/4	2	4-1/4	3	3/16
IL141-RLD-6B-BR	750	3/8-16	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-6B-HX-SL	750	3/8-16	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-6BX3-BR	750	3/8-16	1/2	1-1/4	2	4-1/4	3	3/16
IL141-RLD-6BX3-HX-SL	750	3/8-16	1/2	1-1/4	2	4-1/4	3	3/16
IL141-RLD-6BX4-BR	750	3/8-16	1/2	1-1/4	2	5-1/4	4	3/16
IL141-RLD-6BX4-HX-SL	750	3/8-16	1/2	1-1/4	2	5-1/4	4	3/16
IL141-RLD-7B-BR	1500	1/2-13	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-7B-HX-SL	1500	1/2-13	1/2	1-1/4	2	3-1/4	2	3/16
IL141-RLD-7BX3-BR	1500	1/2-13	1/2	1-1/4	2	4-1/4	3	3/16
IL141-RLD-7BX3-HX-SL	1500	1/2-13	1/2	1-1/4	2	4-1/4	3	3/16
IL141-RLD-7BX4-BR	1500	1/2-13	1/2	1-1/4	2	5-1/4	4	3/16
IL141-RLD-7BX4-HX-SL	1500	1/2-13	1/2	1-1/4	2	5-1/4	4	3/16

Standard finish is black zinc. For silver or gold finish (as shown above) see IEC's Medium-Duty or Heavy-Duty Leveler catalogs.

More thread sizes and length options for this saucer base design in IEC's Medium-Duty Leveler catalog.

To order optional jam nut add "-JN" to part number.

Top broached hex, "allen drive," (-BR) Thread & Hex Size table below:

(For 5/8-11 thru 1-1/4-7 thread sizes, see IEC's Medium-Duty Leveler catalog.)


Top Hex (Allen-drive) Thread & Hex Size								
Thread	1/4-20	5/16-18	3/8-16	1/2-13	5/8-11	3/4-10	1-8	1-1/4-7
Hex Size	1/8	5/32	3/16	1/4	5/16	3/8	9/16	5/8



KNOB STYLE GLIDES – NYLON THREADS

The IEC Knob Style Nylon Thread Glide is ideal for light duty load requirements. These low-profile, solid bottom, large diameter black polypropylene base glides are perfect for leveling and stabilizing furniture, racks, instruments and appliances without the need for tools. Useful in both feet and knob applications.

Nylon threads are especially beneficial for food, medical, marine, electrical, outdoor furniture and many other applications where electrical isolation, magnetism or corrosion is a concern.

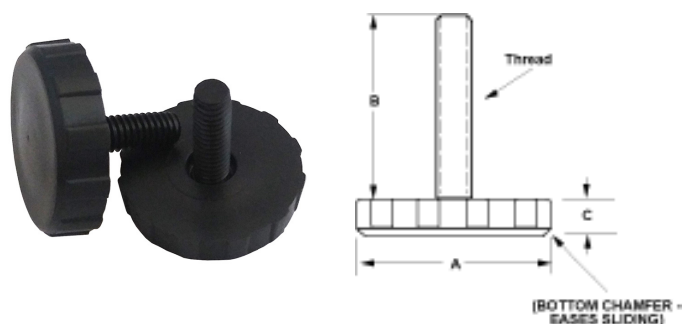

For higher load ratings, more thread sizes in steel and stainless steel and top hex and slot features, see IEC's Knob Style Glides in our Medium Duty Leveler catalog.

KNOB STYLE SOCKET TYPE GLIDES (LEVELERS/KNOBS)

These low-profile polypropylene levelers/knobs are designed for use with socket head allen bolts or threaded rod of various lengths. They are available with three different female thread types: brass insert (-BI), steel hex nut (-HN), or threads molded directly into the polypropylene (-MT). The height of all base sizes is 3/8" thick. The PVC base is a flexible, non-skid and non-marring, rubber-like material.



PN (brass)	PN (hex nut)	PN(molded)	Thread	Base Dia.	Load (lbs.)
IL83-4B-BI	IL83-4B-HN	IL83-4B-MT	1/4-20	1-1/2	100
IL83-5B-BI	IL83-5B-HN	IL83-5B-MT	5/16-18	1-1/2	250
IL83-6B-BI	IL83-6B-HN	IL83-6B-MT	3/8-16	1-1/2	250


IL85-4B-BI	IL85-4B-HN	IL85-4B-MT	1/4-20	2	100
IL85-5B-BI	IL85-5B-HN	IL85-5B-MT	5/16-18	2	250
IL85-6B-BI	IL85-6B-HN	IL85-6B-MT	3/8-16	2	250
IL87-4B-BI	IL87-4B-HN	IL87-4B-MT	1/4-20	2-1/2	100
IL87-5B-BI	IL87-5B-HN	IL87-5B-MT	5/16-18	2-1/2	250
IL87-6B-BI	IL87-6B-HN	IL87-6B-MT	3/8-16	2-1/2	250

IL89-4B-BI	IL89-4B-HN	IL89-4B-MT	1/4-20	3	100
IL89-5B-BI	IL89-5B-HN	IL89-5B-MT	5/16-18	3	250
IL89-6B-BI	IL89-6B-HN	IL89-6B-MT	3/8-16	3	250

PN (PVC)	Thread	Base Dia.	Load (lbs.)
IL83-4B-HN-PVC	1/4-20	1-1/2	75
IL83-5B-HN-PVC	5/16-18	1-1/2	75
IL83-6B-HN-PVC	3/8-16	1-1/2	75

* Partially threaded 1" length

Steel	Load	Thread	A	B	C
Nylon Thread Knob Style Glides					
IL82-4BX3/8-NYL	50	1/4-20	1-1/2	3/8	3/8
IL82-4BX1/2-NYL	50	1/4-20	1-1/2	1/2	3/8
IL82-4BX5/8-NYL	50	1/4-20	1-1/2	5/8	3/8
IL82-4BX7/8-NYL	50	1/4-20	1-1/2	7/8	3/8
IL82-4BX1-NYL	50	1/4-20	1-1/2	1	3/8
IL82-4BX1-3/8-NYL	50	1/4-20	1-1/2	1-3/8	3/8
IL82-4BX1-7/8-NYL	50	1/4-20	1-1/2	1-7/8	3/8
IL82-5BX3/8-NYL	75	5/16-18	1-1/2	3/8	3/8
IL82-5BX5/8-NYL	75	5/16-18	1-1/2	5/8	3/8
IL82-5BX7/8-NYL	75	5/16-18	1-1/2	7/8	3/8
IL82-5BX1-NYL	75	5/16-18	1-1/2	1	3/8
IL82-5BX1-3/8-NYL	75	5/16-18	1-1/2	1-3/8*	3/8
IL82-5BX1-7/8-NYL	75	5/16-18	1-1/2	1-7/8*	3/8
IL82-5BX2-3/8-NYL	75	5/16-18	1-1/2	2-3/8*	3/8
IL82-6BX3/8-NYL	100	3/8-16	1-1/2	3/8	3/8
IL82-6BX5/8-NYL	100	3/8-16	1-1/2	5/8	3/8
IL82-6BX7/8-NYL	100	3/8-16	1-1/2	7/8	3/8
IL82-6BX1-NYL	100	3/8-16	1-1/2	1	3/8
IL82-6BX1-3/8-NYL	100	3/8-16	1-1/2	1-3/8	3/8
IL82-6BX1-7/8-NYL	100	3/8-16	1-1/2	1-7/8	3/8
IL82-6BX2-3/8-NYL	100	3/8-16	1-1/2	2-3/8	3/8
IL84-4BX3/8-NYL	50	1/4-20	2	3/8	3/8
IL84-4BX1/2-NYL	50	1/4-20	2	1/2	3/8
IL84-4BX5/8-NYL	50	1/4-20	2	5/8	3/8
IL84-4BX7/8-NYL	50	1/4-20	2	7/8	3/8
IL84-4BX1-NYL	50	1/4-20	2	1	3/8
IL84-4BX1-3/8-NYL	50	1/4-20	2	1-3/8	3/8
IL84-4BX1-7/8-NYL	50	1/4-20	2	1-7/8	3/8
IL84-4BX2-3/8-NYL	50	1/4-20	2	2-3/8	3/8
IL84-5BX3/8-NYL	75	5/16-18	2	3/8	3/8
IL84-5BX5/8-NYL	75	5/16-18	2	5/8	3/8
IL84-5BX7/8-NYL	75	5/16-18	2	7/8	3/8
IL84-5BX1-NYL	75	5/16-18	2	1	3/8
IL84-5BX1-3/8-NYL	75	5/16-18	2	1-3/8*	3/8
IL84-5BX1-7/8-NYL	75	5/16-18	2	1-7/8*	3/8
IL84-5BX2-3/8-NYL	75	5/16-18	2	2-3/8*	3/8
IL84-6BX3/8-NYL	100	3/8-16	2	3/8	3/8
IL84-6BX5/8-NYL	100	3/8-16	2	5/8	3/8
IL84-6BX7/8-NYL	100	3/8-16	2	7/8	3/8
IL84-6BX1-NYL	100	3/8-16	2	1	3/8
IL84-6BX1-3/8-NYL	100	3/8-16	2	1-3/8	3/8
IL84-6BX1-7/8-NYL	100	3/8-16	2	1-7/8	3/8
IL84-6BX2-3/8-NYL	100	3/8-16	2	2-3/8	3/8
IL86-4BX3/8-NYL	50	1/4-20	2-1/2	3/8	3/8
IL86-4BX1/2-NYL	50	1/4-20	2-1/2	1/2	3/8
IL86-4BX5/8-NYL	50	1/4-20	2-1/2	5/8	3/8
IL86-4BX7/8-NYL	50	1/4-20	2-1/2	7/8	3/8
IL86-4BX1-NYL	50	1/4-20	2-1/2	1	3/8
IL86-4BX1-3/8-NYL	50	1/4-20	2-1/2	1-3/8	3/8
IL86-4BX1-7/8-NYL	50	1/4-20	2-1/2	1-7/8	3/8
IL86-4BX2-3/8-NYL	50	1/4-20	2-1/2	2-3/8	3/8
IL86-5BX3/8-NYL	75	5/16-18	2-1/2	3/8	3/8
IL86-5BX5/8-NYL	75	5/16-18	2-1/2	5/8	3/8
IL86-5BX7/8-NYL	75	5/16-18	2-1/2	7/8	3/8
IL86-5BX1-NYL	75	5/16-18	2-1/2	1	3/8
IL86-5BX1-3/8-NYL	75	5/16-18	2-1/2	1-3/8*	3/8
IL86-5BX1-7/8-NYL	75	5/16-18	2-1/2	1-7/8*	3/8
IL86-5BX2-3/8-NYL	75	5/16-18	2-1/2	2-3/8*	3/8
IL86-6BX3/8-NYL	100	3/8-16	2-1/2	3/8	3/8
IL86-6BX5/8-NYL	100	3/8-16	2-1/2	5/8	3/8
IL86-6BX7/8-NYL	100	3/8-16	2-1/2	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	2-1/2	1	3/8
IL86-6BX1-3/8-NYL	100	3/8-16	2-1/2	1-3/8	3/8
IL86-6BX1-7/8-NYL	100	3/8-16	2-1/2	1-7/8	3/8
IL86-6BX2-3/8-NYL	100	3/8-16	2-1/2	2-3/8	3/8
IL88-4BX3/8-NYL	50	1/4-20	3	3/8	3/8
IL88-4BX1/2-NYL	50	1/4-20	3	1/2	3/8
IL88-4BX5/8-NYL	50	1/4-20	3	5/8	3/8
IL88-4BX7/8-NYL	50	1/4-20	3	7/8	3/8
IL88-4BX1-NYL	50	1/4-20	3	1	3/8
IL88-4BX1-3/8-NYL	50	1/4-20	3	1-3/8	3/8
IL88-4BX1-7/8-NYL	50	1/4-20	3	1-7/8	3/8
IL88-5BX3/8-NYL	75	5/16-18	3	3/8	3/8
IL88-5BX5/8-NYL	75	5/16-18	3	5/8	3/8
IL88-5BX7/8-NYL	75	5/16-18	3	7/8	3/8
IL88-5BX1-NYL	75	5/16-18	3	1	3/8
IL88-5BX1-3/8-NYL	75	5/16-18	3	1-3/8*	3/8
IL88-5BX1-7/8-NYL	75	5/16-18	3	1-7/8*	3/8
IL88-5BX2-3/8-NYL	75	5/16-18	3	2-3/8*	3/8
IL88-6BX3/8-NYL	100	3/8-16	3	3/8	3/8
IL88-6BX5/8-NYL	100	3/8-16	3	5/8	3/8
IL88-6BX7/8-NYL	100	3/8-16	3	7/8	3/8
IL88-6BX1-NYL	100	3/8-16	3	1	3/8
IL88-6BX1-3/8-NYL	100	3/8-16	3	1-3/8	3/8
IL88-6BX1-7/8-NYL	100	3/8-16	3	1-7/8	3/8
IL88-6BX2-3/8-NYL	100	3/8-16	3	2-3/8	3/8



NOTES

65

**INTERNATIONAL EQUIPMENT COMPONENTS, INC.**

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

Your Contact Information

NAME:

TITLE:

COMPANY:

E-MAIL:

STREET ADDRESS OR POB:

CITY:

STATE:

ZIP CODE:

PHONE:

FAX:

Standard Product Request

ITEM #	IEC PART NUMBER	DESCRIPTION	QUANTITY
1			
Comments:			
2			
Comments:			
3			
Comments:			
4			
Comments:			

CUSTOM or MODIFIED Product Request

SIMILAR TO IEC PN#: _____

BASE**STUD**

DIAMETER:	LENGTH:
MATERIAL:	THREAD:
SWIVEL:	MATERIAL:
FINISH: ☐ Gold Iridite ☐ Black Chromate	
☐ Clear Chromate	

OPTIONAL FEATURES

☐ TOP-A-JUST:	☐ INTERNAL BROACH:
☐ NON-SKID PAD:	☐ HEX HEAD:
☐ LAG HOLES:	☐ SQUARE HEAD:
☐ HEAT TREATED STUD:	☐ TOP SLOT:
QUANTITY REQUESTED:	EST ANNUAL USAGE:
Comments / Special Instructions:	

PLEASE FAX THIS FORM TO: 562-498-2275

www.iec-corp.com • 562.597.4533 • www.levelingmounts.com



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.iec-corp.com | www.levelingmounts.com

RUGGEDIZED LIGHT DUTY LEVELERS

WARRANTY & DISCLAIMER

Warranty & Disclaimer

IEC warrants each product against defects in workmanship and material for 90 days from the date of delivery to the user. The warranty is limited to the repair or replacement of any part(s) which are found by IEC to be defective and does not apply to ordinary wear tear, abuse, misapplications and altered products.

All data, dimensions and tables have been thoroughly checked but we can not assume liability for any possible errors or omissions. If you find an error, please notify us so we can correct it for future editions. We reserve the right to change designs and/or specifications without notice. In the event of a change, every attempt will be made to notify the current users.

© Copyright 2019. International Equipment Components, Inc. All rights reserved.

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

HEAVY-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

MEDIUM-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

LIGHT-DUTY LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

METRIC LEVELERS

ANY THREAD ... ANY LENGTH ... ANY BASE



**LEVEL
ALIGN
STABILIZE
PROTECT**

Ph. 562.597.4533

INTERNATIONAL EQUIPMENT COMPONENTS, INC.

2201 E. Willow Street, D-104,

Signal Hill, CA 90755

Email: sales@iec-corp.com

Phone: 562-597-4533

Fax: 562-498-2275

Web: www.iec-corp.com

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

KNOB & HANDLE



**CLAMP
ADJUST
STABILIZE
FASTEN**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

CAP & PLUG PRODUCTS



**FEET
SLIDE
PROTECT
FINISH**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

SURFACE PROTECTION
SLIDERS, GRIPPERS & FELT



**CUSHION
QUIET
SLIDE
PROTECT**

Ph. 562.597.4533

IEC INTERNATIONAL EQUIPMENT COMPONENTS, INC.
www.levelingmounts.com & www.iec-corp.com

LEG & CASTER PRODUCTS



**LEVEL
EXTEND
SUPPORT
ROLL**

Ph. 562.597.4533