



**HEAVY DUTY LEVELERS**  
**LOW PROFILE - SOCKET**

**LOW PROFILE SOCKET LEVELERS**


The IEC Low-Profile Socket Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

**Features**

- Steel/stainless steel options
- Integrated ball and socket
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

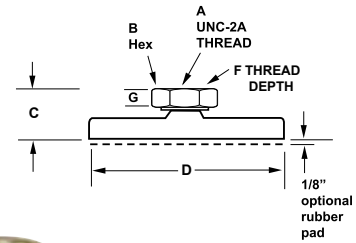

Nut Height: "G" = 1/2", 5/8", 11/16", 3/4" for Threads: 1/2-13, 5/8-11, 3/4-10, 1-8



Nut Height: "G" = 3/16" for Threads: 1/4-20, 5/16-18, 3/8-16

**LOW PROFILE - STEEL & STAINLESS STEEL SOCKET**

Steel	Stainless	Load	A	B	C	D	F	G
IL61-4G	IL61-4S	100	1/4-20	1/2	5/8	3/4	3/8	3/16
IL61-5G	IL61-5S	500	5/16-18	1/2	5/8	3/4	3/8	3/16
IL61-6G	IL61-6S	1000	3/8-16	1/2	5/8	3/4	3/8	3/16
IL61-7G	IL61-7S	2000	1/2-13	5/8	15/16	3/4	3/8	1/2
IL61-8G	IL61-8S	3000	5/8-11	3/4	1-1/8	3/4	1/2	5/8
IL61-9G	IL61-9S	4000	3/4-10	1	1-3/16	3/4	5/8	11/16
IL61-10G	IL61-10S	5000	1-8	1-1/4	1-1/4	3/4	11/16	3/4
IL63-4G	IL63-4S	100	1/4-20	1/2	5/8	1 1/4	3/8	3/16
IL63-5G	IL63-5S	500	5/16-18	1/2	5/8	1 1/4	3/8	3/16
IL63-6G	IL63-6S	1000	3/8-16	1/2	5/8	1 1/4	3/8	3/16
IL63-7G	IL63-7S	2000	1/2-13	5/8	15/16	1 1/4	3/8	1/2
IL63-8G	IL63-8S	3000	5/8-11	3/4	1-1/8	1 1/4	1/2	5/8
IL63-9G	IL63-9S	4000	3/4-10	1	1-3/16	1 1/4	5/8	11/16
IL63-10G	IL63-10S	5000	1-8	1-1/4	1-1/4	1 1/4	11/16	3/4
IL65-4G	IL65-4S	100	1/4-20	1/2	5/8	1 7/8	3/8	3/16
IL65-5G	IL65-5S	500	5/16-18	1/2	5/8	1 7/8	3/8	3/16
IL65-6G	IL65-6S	3000	3/8-16	1/2	5/8	1 7/8	3/8	3/16
IL65-7G	IL65-7S	5000	1/2-13	5/8	15/16	1 7/8	3/8	1/2
IL65-8G	IL65-8S	6000	5/8-11	3/4	1-1/8	1 7/8	1/2	5/8
IL65-9G	IL65-9S	8000	3/4-10	1	1-3/16	1 7/8	5/8	11/16
IL65-10G	IL65-10S	10000	1-8	1-1/4	1-1/4	1 7/8	11/16	3/4
IL67-4G	IL67-4S	100	1/4-20	1/2	5/8	2 1/2	3/8	3/16
IL67-5G	IL67-5S	500	5/16-18	1/2	5/8	2 1/2	3/8	3/16
IL67-6G	IL67-6S	3000	3/8-16	1/2	5/8	2 1/2	3/8	3/16
IL67-7G	IL67-7S	5000	1/2-13	5/8	15/16	2 1/2	3/8	1/2
IL67-8G	IL67-8S	6000	5/8-11	3/4	1-1/8	2 1/2	1/2	5/8
IL67-9G	IL67-9S	8000	3/4-10	1	1-3/16	2 1/2	5/8	11/16
IL67-10G	IL67-10S	10000	1-8	1-1/4	1-1/4	2 1/2	11/16	3/4
IL69-4G	IL69-4S	100	1/4-20	1/2	5/8	3	3/8	3/16
IL69-5G	IL69-5S	500	5/16-18	1/2	5/8	3	3/8	3/16
IL69-6G	IL69-6S	3000	3/8-16	1/2	5/8	3	3/8	3/16
IL69-7G	IL69-7S	5000	1/2-13	5/8	15/16	3	3/8	1/2
IL69-8G	IL69-8S	6000	5/8-11	3/4	1-1/8	3	1/2	5/8
IL69-9G	IL69-9S	8000	3/4-10	1	1-3/16	3	5/8	11/16
IL69-10G	IL69-10S	10000	1-8	1-1/4	1-1/4	3	11/16	3/4
IL71-4G	IL71-4S	100	1/4-20	1/2	5/8	4	3/8	3/16
IL71-5G	IL71-5S	500	5/16-18	1/2	5/8	4	3/8	3/16
IL71-6G	IL71-6S	3000	3/8-16	1/2	5/8	4	3/8	3/16
IL71-7G	IL71-7S	5000	1/2-13	5/8	15/16	4	3/8	1/2
IL71-8G	IL71-8S	6000	5/8-11	3/4	1-1/8	4	1/2	5/8
IL71-9G	IL71-9S	8000	3/4-10	1	1-3/16	4	5/8	11/16
IL71-10G	IL71-10S	10000	1-8	1-1/4	1-1/4	4	11/16	3/4

To order with 1/8" black rubber pad, (add "-P").

To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.



**LOW PROFILE METRIC SOCKET LEVELERS**


The IEC Metric Low-Profile Socket Leveler features an exclusive ball design that minimizes base separation. Ideal for heavy-duty load requirements. The threaded female socket allows use of your own stud or bolt. Integrated ball and swivel socket provide a low-friction support interface. Perfect for cabinets, instruments, machinery and equipment.

**Features**

- Steel/stainless steel options
- Integrated ball and socket
- Adjustable height
- Base adjusts 15° off centerline
- Standard gold irridite zinc finish
- Black oxide or clear chromate options
- Optional rubber pad (add -P)

**Applications**

- Electronic equipment
- Enclosures
- Conveyors
- Machinery
- Work tables
- Display racks

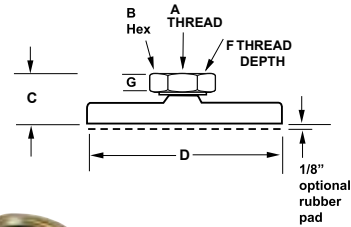

Nut Height: "G" = 1/2", 5/8", 11/16", 3/4"  
for Threads: M12, M16, M20, M24



Nut Height: "G" = 3/16"  
for Threads: M6, M8, M10

**LOW PROFILE - METRIC STEEL & STAINLESS STEEL SOCKET**

Steel	Stainless	Load	A	B	C	D	F	G
IL61-M6G	IL61-M6S	100	M6x1	1/2	5/8	3/4	3/8	3/16
IL61-M8G	IL61-M8S	500	M8x1.25	1/2	5/8	3/4	3/8	3/16
IL61-M10G	IL61-M10S	1000	M10x1.50	1/2	5/8	3/4	3/8	3/16
IL61-M12G	IL61-M12S	2000	M12x1.75	5/8	15/16	3/4	3/8	1/2
IL61-M16G	IL61-M16S	3000	M16x2.00	3/4	1-1/8	3/4	1/2	5/8
IL61-M20G	IL61-M20S	4000	M20x2.50	1	1-3/16	3/4	5/8	11/16
IL61-M24G	IL61-M24S	5000	M24x3.00	1-1/4	1-1/4	3/4	11/16	3/4
IL63-M6G	IL63-M6S	100	M6x1	1/2	5/8	1 1/4	3/8	3/16
IL63-M8G	IL63-M8S	500	M8x1.25	1/2	5/8	1 1/4	3/8	3/16
IL63-M10G	IL63-M10S	1000	M10x1.50	1/2	5/8	1 1/4	3/8	3/16
IL63-M12G	IL63-M12S	2000	M12x1.75	5/8	15/16	1 1/4	3/8	1/2
IL63-M16G	IL63-M16S	3000	M16x2.00	3/4	1-1/8	1 1/4	1/2	5/8
IL63-M20G	IL63-M20S	4000	M20x2.50	1	1-3/16	1 1/4	5/8	11/16
IL63-M24G	IL63-M24S	5000	M24x3.00	1-1/4	1-1/4	1 1/4	11/16	3/4
IL65-M6G	IL65-M6S	100	M6x1	1/2	5/8	1 7/8	3/8	3/16
IL65-M8G	IL65-M8S	500	M8x1.25	1/2	5/8	1 7/8	3/8	3/16
IL65-M10G	IL65-M10S	3000	M10x1.50	1/2	5/8	1 7/8	3/8	3/16
IL65-M12G	IL65-M12S	5000	M12x1.75	5/8	15/16	1 7/8	3/8	1/2
IL65-M16G	IL65-M16S	6000	M16x2.00	3/4	1-1/8	1 7/8	1/2	5/8
IL65-M20G	IL65-M20S	8000	M20x2.50	1	1-3/16	1 7/8	5/8	11/16
IL65-M24G	IL65-M24S	10000	M24x3.00	1-1/4	1-1/4	1 7/8	11/16	3/4
IL67-M6G	IL67-M6S	100	M6x1	1/2	5/8	2 1/2	3/8	3/16
IL67-M8G	IL67-M8S	500	M8x1.25	1/2	5/8	2 1/2	3/8	3/16
IL67-M10G	IL67-M10S	3000	M10x1.50	1/2	5/8	2 1/2	3/8	3/16
IL67-M12G	IL67-M12S	5000	M12x1.75	5/8	15/16	2 1/2	3/8	1/2
IL67-M16G	IL67-M16S	6000	M16x2.00	3/4	1-1/8	2 1/2	1/2	5/8
IL67-M20G	IL67-M20S	8000	M20x2.50	1	1-3/16	2 1/2	5/8	11/16
IL67-M24G	IL67-M24S	10000	M24x3.00	1-1/4	1-1/4	2 1/2	11/16	3/4
IL69-M6G	IL69-M6S	100	M6x1	1/2	5/8	3	3/8	3/16
IL69-M8G	IL69-M8S	500	M8x1.25	1/2	5/8	3	3/8	3/16
IL69-M10G	IL69-M10S	3000	M10x1.50	1/2	5/8	3	3/8	3/16
IL69-M12G	IL69-M12S	5000	M12x1.75	5/8	15/16	3	3/8	1/2
IL69-M16G	IL69-M16S	6000	M16x2.00	3/4	1-1/8	3	1/2	5/8
IL69-M20G	IL69-M20S	8000	M20x2.50	1	1-3/16	3	5/8	11/16
IL69-M24G	IL69-M24S	10000	M24x3.00	1-1/4	1-1/4	3	11/16	3/4
IL71-M6G	IL71-M6S	100	M6x1	1/2	5/8	4	3/8	3/16
IL71-M8G	IL71-M8S	500	M8x1.25	1/2	5/8	4	3/8	3/16
IL71-M10G	IL71-M10S	3000	M10x1.50	1/2	5/8	4	3/8	3/16
IL71-M12G	IL71-M12S	5000	M12x1.75	5/8	15/16	4	3/8	1/2
IL71-M16G	IL71-M16S	6000	M16x2.00	3/4	1-1/8	4	1/2	5/8
IL71-M20G	IL71-M20S	8000	M20x2.50	1	1-3/16	4	5/8	11/16
IL71-M24G	IL71-M24S	10000	M24x3.00	1-1/4	1-1/4	4	11/16	3/4

To order with 1/8" black rubber pad, (add "-P").

To order with two (2) 5/8" dia. lag holes centered at 2-3/4", (add "-H"). Only available on 4" base.