



INTERNATIONAL EQUIPMENT COMPONENTS, INC.

Phone: 562.597.4533 eMail: sales@iec-corp.com

Web: www.levelingmounts.com | www.iec-corp.com


SURFACE PROTECTION

THREADED FELT PADS

TUBING FELT PADS

Threaded Felt Pads

IEC's threaded felt pads and wood screw felt pads provide floor protection and reduce noise. The threaded stud allows for leveling adjustment to reduce table and chair wobble. Standard thread length is 1.0 inch. For wood legs that are not threaded, use IEC's threaded insert "T-nuts" or propeller nuts found on pages 31 and 32 of IEC's Light Duty Leveler Catalog. Thread length is 1" (25mm) for metric felt pads.

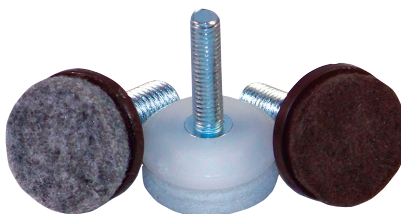

THREADED FELT PADS

P/N	Dia.	Felt Thick.	Base Height	Thread
IL33C-41B-FELT	1	5/16	1/2	1/4-20x1
IL33C-51B-FELT	1	5/16	1/2	5/16-18x1
IL33C-61B-FELT	1	5/16	1/2	3/8-16x1

Thread length is 1" (25mm) for the metric felt pads.

METRIC - THREADED FELT PADS - BROWN

P/N	Dia.	Felt Thick.	Base Height	Thread
IL33C-M6B-FELT	1	5/16	1/2	M6x1.0
IL33C-M8B-FELT	1	5/16	1/2	M8x1.25
IL33C-M10B-FELT	1	5/16	1/2	M10x1.50

Thread length is 1" (25mm) for the metric felt pads.

METRIC - THREADED FELT PADS - WHITE

P/N	Dia.	Felt Thick.	Base Height	Thread
IL33C-M6W-FELT	1	5/16	1/2	M6x1.0
IL33C-M8W-FELT	1	5/16	1/2	M8x1.25
IL33C-M10W-FELT	1	5/16	1/2	M10x1.50

Thread length is 1" (25mm) for the metric felt pads.

FELT TUBE GLIDES

P/N (ROUND)	TUBE O.D.	GAUGE	FIN Height
IL24A-PLUG-FELT	3/4	16-18	1
IL24-PLUG-FELT	7/8	16-18	1
IL25-PLUG-FELT	1	16-18	1
IL25A-PLUG-FELT	1-1/8	16-18	1
IL26-PLUG-FELT	1-1/4	16-18	1

SWIVEL TUBE GLIDES — FELT

P/N (ROUND)	TUBE O.D.	GAUGE	FIN Height
IL24A-PLUG-SVL-FELT	3/4	16-18	1
IL24-PLUG-SVL-FELT	7/8	16-18	1
IL25-PLUG-SVL-FELT	1	16-18	1
IL25A-PLUG-SVL-FELT	1-1/8	16-18	1

Felt Tube Glides

These black felt tube glides have a non-swivel felt base.



Swivel Tube Glides

These black plastic tube glides swivel approx. 30 degrees. Available with solid nylon base or felt base. Coming Soon: Teflon slider and non-skid rubber bases.

